

# **OCTAL BUFFERS/DRIVERS WITH 3-STATE OUTPUTS**

Check for Samples: SN54AHCT540, SN74AHCT540

#### **FEATURES**

- Inputs Are TTL-Voltage Compatible
- Latch-Up Performance Exceeds 250 mA Per JFSD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)
  - 1000-V Charged-Device Model (C101)


#### **DESCRIPTION**

The 'AHCT540 octal buffers/drivers are ideal for driving bus lines or buffer memory address registers. These devices feature inputs and outputs on opposite sides of the package to facilitate printed circuit board layout.


The 3-state control gate is a two-input AND gate with active-low inputs so that if either output-enable (OE1 or OE2) input is high, all corresponding outputs are in the high-impedance state. The outputs provide inverted data when they are not in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

SN54AHCT540 . . . J OR W PACKAGE SN74AHCT540 . . . DB, DGV, DW, N, NS, OR PW PACKAGE (TOP VIEW)



# SN54AHCT540 . . . FK PACKAGE (TOP VIEW)



# FUNCTION TABLE (EACH BUFFER/DRIVER)


	INPUTS		OUTPUT
OE1	OE2	Α	Y
L	L	L	Н
L	L	Н	L
Н	X	X	Z
X	Н	X	Z



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



### **LOGIC DIAGRAM (POSITIVE LOGIC)**



To Seven Other Channels

#### **ABSOLUTE MAXIMUM RATINGS**

over operating free-air temperature range (unless otherwise noted)(1)

		VALUE	UNIT
Supply voltage range, V <sub>CC</sub>		-0.5 to 7	V
Input voltage range, V <sub>I</sub> <sup>(2)</sup>		-0.5 to 7	V
Output voltage range, V <sub>O</sub> <sup>(2)</sup>		-0.5 to V <sub>CC</sub> + 0.5	V
Input clamp current, I <sub>IK</sub> (V <sub>I</sub> < 0)		-20	mA
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O >$	V <sub>CC</sub> )	±20	mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V$	cc)	±25	mA
Continuous current through V <sub>CC</sub> or GND		±75	mA
	DB package	70	
	DGV package	92	
Declared the small improduces Q (3)	DW package	58	00/14/
Package thermal impedance, $\theta_{JA}$ (3)	N package	69	°C/W
	NS package	60	
	PW package	83	
Storage temperature range, T <sub>stq</sub>		-65 to 150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>(2)</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(3)</sup> The package thermal impedance is calculated in accordance with JESD 51-7.



## **RECOMMENDED OPERATING CONDITIONS<sup>(1)</sup>**

		SN54AH	CT540	SN74AHC	CT540	UNIT	
		MIN	MAX	MIN	MAX	UNII	
V <sub>CC</sub>	Supply voltage	4.5	5.5	4.5	5.5	V	
V <sub>IH</sub>	High-level input voltage	2		2		V	
V <sub>IL</sub>	Low-level Input voltage		0.8		0.8	V	
VI	Input voltage	0	5.5	0	5.5	V	
Vo	Output voltage	0	$V_{CC}$	0	V <sub>CC</sub>	V	
I <sub>OH</sub>	High-level output current		-8		-8	mA	
I <sub>OL</sub>	Low-level output current		8		8	mA	
Δt/Δν	Input Transition rise or fall rate		20		20	ns/V	
T <sub>A</sub>	Operating free-air temperature	-55	125	-40	125	°C	

<sup>(1)</sup> All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## **ELECTRICAL CHARACTERISTICS**

over operating free-air temperature range (unless otherwise noted)

						T <sub>A</sub> = -55°		T <sub>A</sub> = -40°		T <sub>A</sub> = -40° 125°0		
PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	T <sub>A</sub> = 25°C			125°C		65 (	•	Recomme	ended	UNIT
						SN54AHCT540		SN74AH	CT540	SN74AHCT540		
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
V	$I_{OH} = -50 \mu A$	4.5 V	4.4	4.5		4.4		4.4		4.4		V
$V_{OH}$	$I_{OH} = -8 \text{ mA}$	4.5 V	3.94			3.8		3.8		3.8		V
V	I <sub>OL</sub> = 50 μA	4.5 V			0.1		0.1		0.1		0.1	V
$V_{OL}$	I <sub>OH</sub> = 8 mA	4.5 V			0.36		0.44		0.44		0.44	\ \ \
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND	0 V to 5.5 V			±0.1		±1 <sup>(1)</sup>		±1		±1	μA
I <sub>OZ</sub>	$V_O = V_{CC}$ or GND	5.5 V			±0.25		±2.5		±2.5		±2.5	μA
Icc	$V_I = V_{CC} \text{ or } $ $I_O = 0$	5.5 V			4		40		20		40	μA
$\Delta I_{CC}^{(2)}$	One input at 3.4 V, Other inputs at V <sub>CC</sub> or GND	5.5 V			1.35		1.5		1.5		1.5	mA
Ci	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		2	10				10			pF
Co	V <sub>O</sub> = V <sub>CC</sub> or GND	5V		4								pF

<sup>(1)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested at VCC = 0 V.

<sup>(2)</sup> This is the increase in supply current for each input at one of the specified TTL voltage levels, rather than 0 V or VCC.



## **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range,  $V_{CC}$  = 5 V  $\pm$  0.5 V (unless otherwise noted) (see Figure 1)

						T <sub>A</sub> = -55		T <sub>A</sub> = -4 85		T <sub>A</sub> = -40		
PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD CAPACITANCE			123	C	65	C	Recomm	UNIT	
	(INPUT)	(001701)				SN54AHCT540		SN54AHCT540		SN54AHCT540		
				TYP	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t <sub>PLH</sub>	Α	Υ	C 45 pF	4.0(1)	6.0 <sup>(1)</sup>	1 <sup>(1)</sup>	7.5 <sup>(1)</sup>	1	7.5	1	7.5	20
t <sub>PHL</sub>	A	Ť	$C_L = 15 pF$	4.0 <sup>(1)</sup>	6.0 <sup>(1)</sup>	1 <sup>(1)</sup>	7.5 <sup>(1)</sup>	1	7.5	1	7.5	ns
t <sub>PZH</sub>	ŌĒ	Υ	C 15 pF	5.5 <sup>(1)</sup>	8.0 <sup>(1)</sup>	1 <sup>(1)</sup>	9 <sup>(1)</sup>	1	9.0	1	9.0	20
t <sub>PZL</sub>	OE	Ť	C <sub>L</sub> = 15 pF	5.5 <sup>(1)</sup>	8.0 <sup>(1)</sup>	1 <sup>(1)</sup>	9 <sup>(1)</sup>	1	9.0	1	9.0	ns
t <sub>PHZ</sub>	ŌĒ	Y	C 15 pF	5.0 <sup>(1)</sup>	8.0 <sup>(1)</sup>	1 <sup>(1)</sup>	9 <sup>(1)</sup>	1	9	1	9	20
t <sub>PLZ</sub>	OE	Ť	C <sub>L</sub> = 15 pF	5.0 <sup>(1)</sup>	8.0 <sup>(1)</sup>	1 <sup>(1)</sup>	9 <sup>(1)</sup>	1	9	1	9	ns
t <sub>PLH</sub>	Α	Υ	C 50 pF	6.0	8.5	1	10	1	10	1	10	20
t <sub>PHL</sub>	A	Ť	$C_L = 50 \text{ pF}$	6.0	8.5	1	10	1	10	1	10	ns
t <sub>PZH</sub>	<del>oe</del>	Υ	C = 50 pE	7.5	11.0	1	12	1	12	1	12	20
t <sub>PZL</sub>	OE	Ť	$C_L = 50 \text{ pF}$	7.5	11.0	1	12	1	12	1	12	ns
t <sub>PHZ</sub>		Y	C <sub>1</sub> = 50 pF	8.0	11.0	1	12	1	12	1	12	ns
t <sub>PLZ</sub>	OE .		C <sub>L</sub> = 50 pr	8.0	11.0	1	12	1	12	1	12	
t <sub>sk(o)</sub>	·		C <sub>L</sub> = 50 pF		1 (2)				1			

<sup>(1)</sup> On products compliant to MIL-PRF-38535, this parameter is not production tested.

# **OPERATING CHARACTERISTICS**


 $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$ 

	PARAMETER	TEST CONDITIONS	TYP	UNIT
$C_{pd}$	Power dissipation capacitance	No load, f = 1 MHz	12	pF

<sup>(2)</sup> On products compliant to MIL-PRF-38535, this parameter does not apply



#### PARAMETER MEASUREMENT INFORMATION

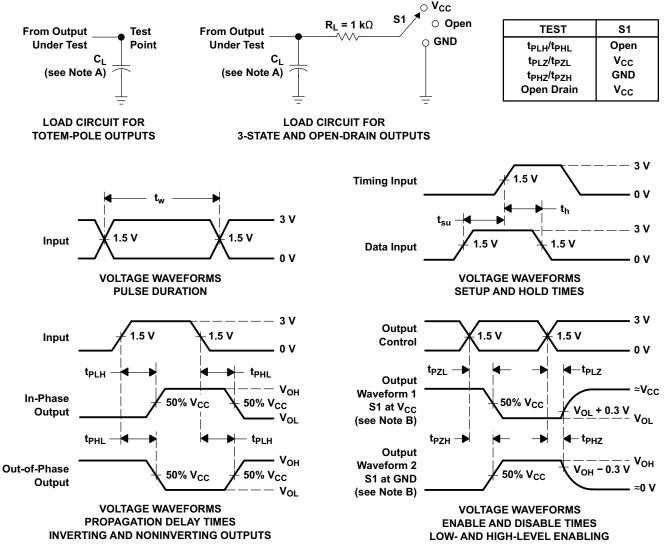

- A. C<sub>1</sub> includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
  - Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq$  3 ns.
- D. The outputs are measured one at a time with one input transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



# **REVISION HISTORY**

Cł	hanges from Revision L (July 2003) to Revision M	Page
•	Changed document format from Quicksilver to DocZone.	1
•	Extended operating temperature range to 125°C	3

www.ti.com 16-Apr-2024

#### PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9685101QRA	ACTIVE	CDIP	J	20	20	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9685101QR A SNJ54AHCT540J	Samples
SN74AHCT540DBR	ACTIVE	SSOP	DB	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HB540	Samples
SN74AHCT540DGVR	ACTIVE	TVSOP	DGV	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HB540	Samples
SN74AHCT540DWR	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT540	Samples
SN74AHCT540DWRE4	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT540	Samples
SN74AHCT540N	ACTIVE	PDIP	N	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-40 to 125	SN74AHCT540N	Samples
SN74AHCT540NSR	ACTIVE	SO	NS	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	AHCT540	Samples
SN74AHCT540PWR	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 125	HB540	Samples
SNJ54AHCT540J	ACTIVE	CDIP	J	20	20	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9685101QR A SNJ54AHCT540J	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

RoHS Exempt: Til defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

# PACKAGE OPTION ADDENDUM

www.ti.com 16-Apr-2024

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54AHCT540, SN74AHCT540:

Catalog: SN74AHCT540

Military: SN54AHCT540

NOTE: Qualified Version Definitions:

Catalog - TI's standard catalog product

• Military - QML certified for Military and Defense Applications

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 16-Apr-2024

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74AHCT540DBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74AHCT540DGVR	TVSOP	DGV	20	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AHCT540DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74AHCT540NSR	SO	NS	20	2000	330.0	24.4	8.4	13.0	2.5	12.0	24.0	Q1
SN74AHCT540PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1



www.ti.com 16-Apr-2024



#### \*All dimensions are nominal

7 til dilliciololio ale Hollinai							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74AHCT540DBR	SSOP	DB	20	2000	356.0	356.0	35.0
SN74AHCT540DGVR	TVSOP	DGV	20	2000	356.0	356.0	35.0
SN74AHCT540DWR	SOIC	DW	20	2000	367.0	367.0	45.0
SN74AHCT540NSR	so	NS	20	2000	367.0	367.0	45.0
SN74AHCT540PWR	TSSOP	PW	20	2000	356.0	356.0	35.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 16-Apr-2024

## **TUBE**



#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74AHCT540N	N	PDIP	20	20	506	13.97	11230	4.32

# 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

# DGV (R-PDSO-G\*\*)

#### **24 PINS SHOWN**

#### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194

# N (R-PDIP-T\*\*)

# PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SOIC



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

## PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated