www.ti.com

# RS-232 TRANSCEIVER WITH SPLIT SUPPLY PIN FOR LOGIC SIDE

Check for Samples: MAX3386E

#### **FEATURES**

- V<sub>L</sub> Pin for Compatibility With Mixed-Voltage Systems Down to 2.5 V on Logic Side
- Enhanced ESD Protection on RIN Inputs and DOUT Outputs
  - ±15-kV Human-Body Model
  - ±15-kV IEC 61000-4-2, Air-Gap Discharge
  - ±8-kV IEC 61000-4-2, Contact Discharge
- Low 300-µA Supply Current
- · Specified 250-kbps Data Rate
- 1-µA Low-Power Shutdown
- Meets EIA/TIA-232 Specifications Down to 3 V

#### **APPLICATIONS**

- · Hand-Held Equipment
- PDAs
- Cell Phones
- Battery-Powered Equipment
- Data Cables

# **DESCRIPTION/ORDERING INFORMATION**

The MAX3386E is a three-driver and two-receiver RS-232 interface device, with split supply pins for mixed-signal operations. All RS-232 inputs and outputs are protected to ±15 kV using the IEC 61000-4-2 Air-Gap Discharge method, ±8 kV using the IEC 61000-4-2 Contact Discharge method, and ±15 kV using the Human-Body Model.

The charge pump requires only four small  $0.1-\mu F$  capacitors for operation from a 3.3-V supply. The MAX3386E is capable of running at data rates up to 250 kbps, while maintaining RS-232-compliant output levels.

The MAX3386E has a unique  $V_L$  pin that allows operation in mixed-logic voltage systems. Both driver in (DIN) and receiver out (ROUT) logic levels are pin programmable through the  $V_L$  pin. The MAX3386E is available in a space-saving thin shrink small-outline package (TSSOP).

#### ORDERING INFORMATION


T <sub>A</sub> PACKAGE <sup>(1)</sup> (2)		ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 70°C	TSSOP – PW	MAX3386ECPWR	MP386EC
	SOIC - DW	MAX3386ECDW	MAX3386EC
–40°C to 85°C	TSSOP – PW	MAX3386EIPWR	MP386EI
-40 C to 65 C	SOIC - DW	MAX3386EIDW	MAX3386EI

<sup>(1)</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

<sup>(2)</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

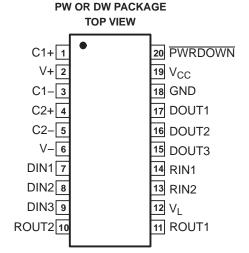




# **Table 1. TRUTH TABLE (SHUTDOWN FUNCTION)**

PWRDWN DRIVER OUTPUTS		RECEIVER OUTPUTS	CHARGE PUMP	
L	High-Z	High-Z	Inactive	
Н	Active	Active	Active	

# **FUNCTIONAL BLOCK DIAGRAM**

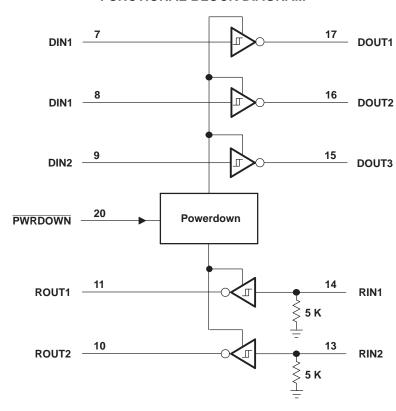

# **TERMINAL FUNCTIONS**

TERMINAL		DESCRIPTION
NAME	NO.	DESCRIPTION
C1+	1	Positive terminal of the voltage-doubler charge-pump capacitor
V+	2	5.5-V supply generated by the charge pump
C1-	3	Negative terminal of the voltage-doubler charge-pump capacitor
C2+	4	Positive terminal of the inverting charge-pump capacitor
C2-	5	Negative terminal of the inverting charge-pump capacitor
V-	6	-5.5-V supply generated by the charge pump
DIN1 DIN2 DIN3	7 8 9	Driver inputs
ROUT2 ROUT1	10 11	Receiver outputs. Swing between 0 and V <sub>L</sub> .
$V_L$	12	Logic-level supply. All CMOS inputs and outputs are referenced to this supply.
RIN2 RIN1	13 14	RS-232 receiver inputs
DOUT3 DOUT2 DOUT1	15 16 17	RS-232 driver outputs
GND	18	Ground

Submit Documentation Feedback

www.ti.com

#### **TERMINAL FUNCTIONS (continued)**

TERMINAL		DESCRIPTION	
NAME	NO.	DESCRIPTION	
V <sub>CC</sub>	19	3-V to 5.5-V supply voltage	
PWRDWN	20	Powerdown input L = Powerdown H = Normal operation	

# Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
	V <sub>CC</sub> to GND		-0.3	6	V
	V <sub>L</sub> to GND		-0.3	V <sub>CC</sub> + 0.3	V
	V+ to GND		-0.3	7	V
	V- to GND		0.3	-7	V
	V+ +  V-  <sup>(2)</sup>			13	V
V	Input voltage	DIN, PWRDWN to GND	-0.3	6	
VI		RIN to GND		±25	
.,	Outrotton	DOUT to GND		±13.2	.,
Vo	Output voltage	ROUT	-0.3	V <sub>L</sub> + 0.3	V
	Short-circuit duration DOUT to GND			-0.3 V <sub>CC</sub> + 0.3 V <sub>C</sub> -0.3 7 V <sub>C</sub> 0.3 -7 V 0.3 -7 V 13 V -0.3 6 ±25 ±13.2 -0.3 V <sub>L</sub> + 0.3 Continuous 559 m 150 °C -65 150 °C	
	Continuous power dissipation	T <sub>A</sub> = 70°C, 20-pin TSSOP (derate 7 mW/°C above 70°C)		559	mW
TJ	Junction temperature	•		150	°C
T <sub>stg</sub>	Storage temperature range		-65	150	°C
	Lead temperature (soldering, 10 s)			300	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

# **Recommended Operating Conditions**

				MIN	MAX	UNIT
$V_{CC}$	Supply voltage			3	5.5	V
$V_{L}$	Supply voltage	oly voltage		2.25	$V_{CC}$	V
	Input logic throohold low	DIN, PWRDWN	$V_{L} = 3 \text{ V or } 5.5 \text{ V}$		8.0	V
	Input logic threshold low	DIN, PVVRDVVN	$V_{L} = 2.3 \text{ V}$		0.6	V
	Input logic threshold high DIN, PWRDWN	V <sub>L</sub> = 5.5 V	2.4			
		DIN, PWRDWN	V <sub>L</sub> = 3 V	2.0		V
			$V_L = 2.7 \text{ V}$	1.4		
	Operating temperature		MAX3386ECPWR	0	70	°C
	Operating temperature		MAX3386EIPWR	-40	85	C
	Receiver input voltage			-25	25	V

# **Electrical Characteristics**

over operating free-air temperature range,  $V_{CC}$  =  $V_L$  = 3 V to 5.5 V, C1–C4 = 0.1  $\mu$ F (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F (tested at 5 V  $\pm$  10%) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
DC Characteristics (V <sub>CC</sub> = 3.3 V or 5 V, T <sub>A</sub> = 25°C)					
Powerdown supply current			1	10	μΑ

(1) Typical values are at  $V_{CC} = V_L = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

<sup>(2)</sup> V+ and V- can have maximum magnitudes of 7 V, but their absolute difference cannot exceed 13 V.



# **Electrical Characteristics (continued)**

over operating free-air temperature range,  $V_{CC}$  =  $V_L$  = 3 V to 5.5 V, C1–C4 = 0.1  $\mu$ F (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F (tested at 5 V  $\pm$  10%) (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
Supply current	PWRDWN = V <sub>CC</sub> , No load		0.3	1	mA

# **ESD Protection**

PARAMETER	TEST CONDITIONS	TYP	UNIT
	Human-Body Model	±15	
RIN, DOUT	IEC 61000-4-2 Air-Gap Discharge	±15	kV
	IEC 61000-4-2 Contact Discharge	±8	

Submit Documentation Feedback



## **RECEIVER SECTION**

#### **Electrical Characteristics**

over operating free-air temperature range,  $V_{CC}$  =  $V_L$  = 3 V to 5.5 V, C1–C4 = 0.1  $\mu$ F (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F (tested at 5 V  $\pm$  10%),  $T_A$  =  $T_{MIN}$  to  $T_{MAX}$  (unless otherwise noted)

	PARAMETER	TEST (	CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
I <sub>off</sub>	Output leakage current	ROUT, receivers disabled			±0.05	±10	μΑ
$V_{OL}$	Output voltage low	$I_{OUT} = 1.6 \text{ mA}$	I <sub>OUT</sub> = 1.6 mA			0.4	V
$V_{OH}$	Output voltage high	$I_{OUT} = -1 \text{ mA}$		$V_{L} - 0.6$	$V_{L} - 0.1$		V
V	Leavet there also let law.	hold low $T_A = 25^{\circ}C$	V <sub>L</sub> = 5 V	0.8	1.2		V
V <sub>IT</sub>	Input threshold low		$V_{L} = 3.3 \text{ V}$	0.6	1.5		V
V	Innut throohold high	$V_L = 5 \text{ V}$	V <sub>L</sub> = 5 V		1.8	2.4	V
V <sub>IT+</sub>	Input threshold high	T <sub>A</sub> = 25°C	$V_{L} = 3.3 \text{ V}$		1.5	2.4	V
V <sub>hys</sub>	Input hysteresis				0.5		V
	Input resistance	$T_A = 25^{\circ}C$		3	5	7	kΩ

<sup>(1)</sup> Typical values are at  $V_{CC} = V_L = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ 

# **Switching Characteristics**

over operating free-air temperature range,  $V_{CC} = V_L = 3 \text{ V}$  to 5.5 V, C1–C4 = 0.1  $\mu\text{F}$  (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu\text{F}$ , C2–C4 = 0.33  $\mu\text{F}$  (tested at 5 V  $\pm$  10%),  $T_A = T_{MIN}$  to  $T_{MAX}$  (unless otherwise noted)

	PARAMETER	TEST CONDITIONS		UNIT
t <sub>PHL</sub>	Descriver propagation delay	Receiver input to receiver output, C <sub>L</sub> = 150 pF		
t <sub>PLH</sub>	Receiver propagation delay			μs
t <sub>PHL</sub> – t <sub>PLH</sub>	Receiver skew		50	ns
t <sub>en</sub>	Receiver output enable time	From PWRDWN	200	ns
t <sub>dis</sub>	Receiver output disable time	From PWRDWN	200	ns

<sup>(1)</sup> Typical values are at  $V_{CC} = V_L = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .



#### DRIVER SECTION

## **Electrical Characteristics**

over operating free-air temperature range,  $V_{CC}$  =  $V_L$  = 3 V to 5.5 V, C1–C4 = 0.1  $\mu$ F (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu$ F, C2–C4 = 0.33  $\mu$ F (tested at 5 V  $\pm$  10%),  $T_A$  =  $T_{MIN}$  to  $T_{MAX}$  (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
$V_{OH}$	Output voltage swing	All driver outputs loaded with 3 $k\Omega$ to ground	±5	±5.4		V
r <sub>o</sub>	Output resistance	$V_{CC} = V + = V - = 0$ , Driver output = ±2 V	300	10M		Ω
Ios	Output short-circuit current	$V_{T\_OUT} = 0$			±60	mA
I <sub>OZ</sub>	Output leakage current	$V_{T\_OUT} = \pm 12 \text{ V}$ , Driver disabled, $V_{CC} = 0 \text{ or } 3 \text{ V to } 5.5 \text{ V}$			±25	μΑ
	Driver input hysteresis				0.5	V
	Input leakage current	DIN, PWRDWN		±0.01	±1	μΑ

<sup>(1)</sup> Typical values are at  $V_{CC} = V_L = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ 

# **Timing Requirements**

over operating free-air temperature range,  $V_{CC} = V_L = 3 \text{ V}$  to 5.5 V, C1–C4 = 0.1  $\mu\text{F}$  (tested at 3.3 V  $\pm$  10%), C1 = 0.047  $\mu\text{F}$ , C2–C4 = 0.33  $\mu\text{F}$  (tested at 5 V  $\pm$  10%),  $T_A = T_{MIN}$  to  $T_{MAX}$  (unless otherwise noted)

	PARAMETER			MIN	TYP <sup>(1)</sup>	MAX	UNIT
	Maximum data rate	$R_L = 3 \text{ k}\Omega, C_L = 1000 \text{ pF}, O$	250			kbps	
	Time-to-exit powerdown	V <sub>T_OUT</sub>   > 3.7 V		100		μs	
t <sub>PHL</sub> - t <sub>PLH</sub>	Driver skew <sup>(2)</sup>						ns
		$V_{CC} = 3.3 \text{ V},$	C <sub>L</sub> = 150 pF to 1000 pF	6		30	
	$\begin{array}{ll} \text{Transition-region} \\ \text{slew rate} \end{array} \begin{array}{l} \text{T}_{A} = 25^{\circ}\text{C}, \\ \text{R}_{L} = 3 \text{ k}\Omega \text{ to 7 k}\Omega, \\ \text{Measured from 3 V} \\ \text{to -3 V or -3 V to 3 V} \end{array}$	$R_L = 3 \text{ k}\Omega \text{ to } 7 \text{ k}\Omega,$ Measured from 3 V	C <sub>L</sub> = 150 pF to 2500 pF	4		30	V/µs

# **ESD Protection**


PARAMETER	TEST CONDITIONS	TYP	UNIT
	Human-Body Model	±15	
RIN, DOUT	IEC 61000-4-2 Air-Gap Discharge	±15	kV
	IEC 61000-4-2 Contact Discharge	±8	

Submit Documentation Feedback

<sup>(1)</sup> Typical values are at  $V_{CC} = V_L = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ . (2) Driver skew is measured at the driver zero crosspoint.




# **APPLICATION INFORMATION**

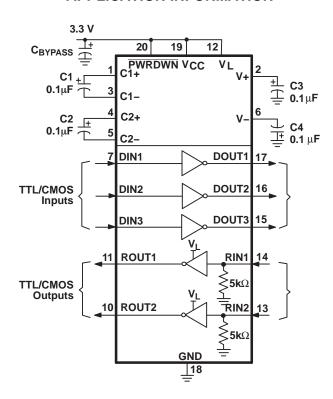




#### PARAMETER MEASUREMENT INFORMATION

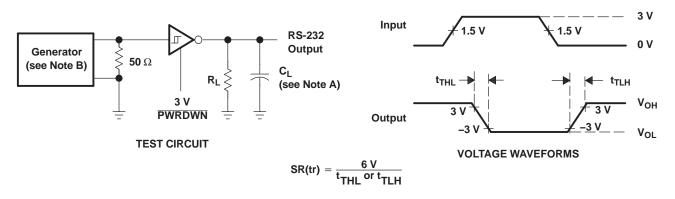

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O$  = 50  $\Omega$ , 50% duty cycle,  $t_r \le 10$  ns,  $t_f \le 10$  ns.


Figure 1. Driver Slew Rate

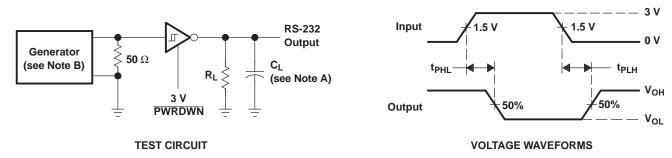

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_r \le 10$  ns.  $t_f \le 10$  ns.

Figure 2. Driver Pulse Skew

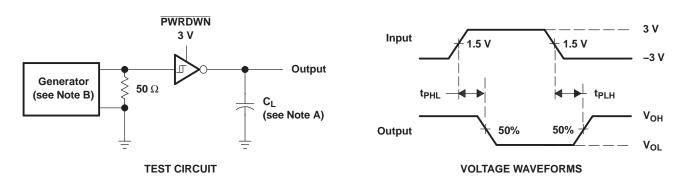


NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. The pulse generator has the following characteristics:  $Z_O = 50 \ \Omega$ , 50% duty cycle,  $t_f \le 10 \ ns$ .

Figure 3. Receiver Propagation Delay Times



# PARAMETER MEASUREMENT INFORMATION

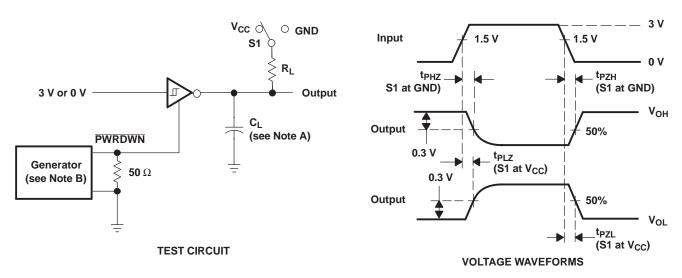

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

B. The pulse generator has the following characteristics:  $Z_0 = 50 \ \Omega$ , 50% duty cycle,  $t_r \le 10 \ ns$ ,  $t_f \le 10 \ ns$ .

Figure 4. Receiver Enable and Disable Times



# **REVISION HISTORY**

Cł	nanges from Revision A (November 2008) to Revision B	Page
•	Changed V <sub>L</sub> Pin for Compatibility With Mixed-Voltage Systems Down to 2.5 V (originally 1.8 V) on the Logic Side	1
•	Changed V <sub>L</sub> Supply MIN value from 1.65 V to 2.25 V.	3
•	Deleted V <sub>L</sub> = 1.65V parameter from Input logic threshold low.	3
•	Deleted V <sub>L</sub> = 1.95V parameter from Input logic threshold high.	3

Submit Documentation Feedback

11-Nov-2025

www.ti.com

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking
	(1)	(2)			(3)	(4)	(5)		(6)
MAX3386ECDWR	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3386EC
MAX3386ECDWR.A	Active	Production	SOIC (DW)   20	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	MAX3386EC
MAX3386ECPW	Obsolete	Production	TSSOP (PW)   20	-	-	Call TI	Call TI	0 to 70	MP386EC
MAX3386ECPWR	Obsolete	Production	TSSOP (PW)   20	-	-	Call TI	Call TI	0 to 70	MP386EC
MAX3386EIDW	Obsolete	Production	SOIC (DW)   20	-	-	Call TI	Call TI	-40 to 85	MAX3386EI
MAX3386EIDWR	Obsolete	Production	SOIC (DW)   20	-	-	Call TI	Call TI	-40 to 85	MAX3386EI
MAX3386EIPW	Obsolete	Production	TSSOP (PW)   20	-	-	Call TI	Call TI	-40 to 85	MP386EI
MAX3386EIPWR	Obsolete	Production	TSSOP (PW)   20	-	-	Call TI	Call TI	-40 to 85	MP386EI

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE OPTION ADDENDUM**

www.ti.com 11-Nov-2025


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
MAX3386ECDWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

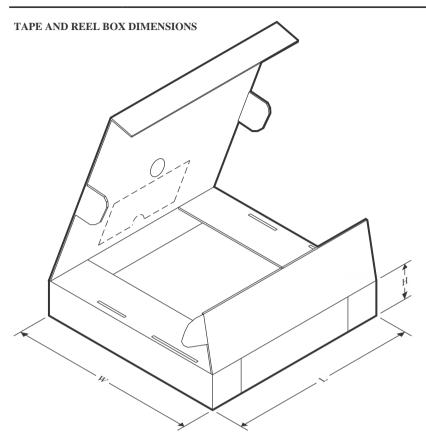


# \*All dimensions are nominal

	Device	Package Type	ackage Type Package Drawing		SPQ	Length (mm)	Width (mm)	Height (mm)	
ı	MAX3386ECDWR	SOIC	DW	20	2000	356.0	356.0	45.0	



SMALL OUTLINE PACKAGE

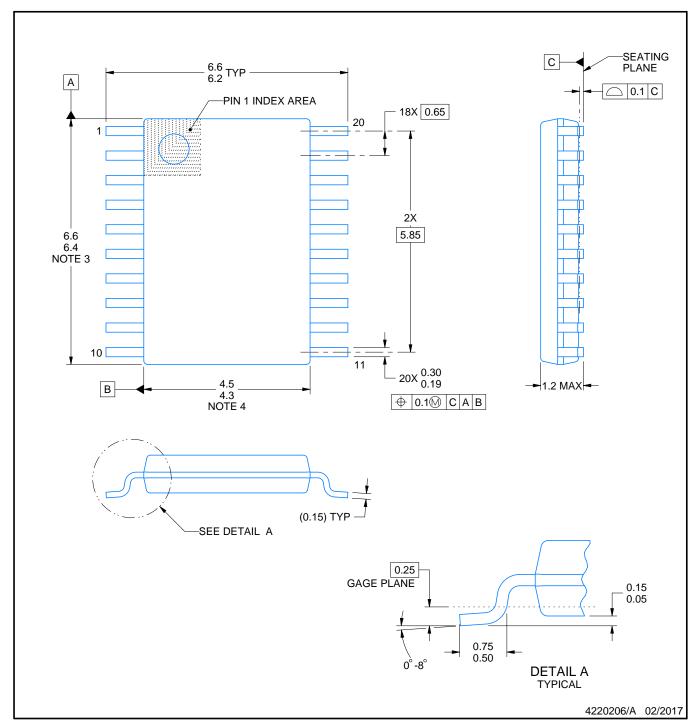

## NOTES:


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE

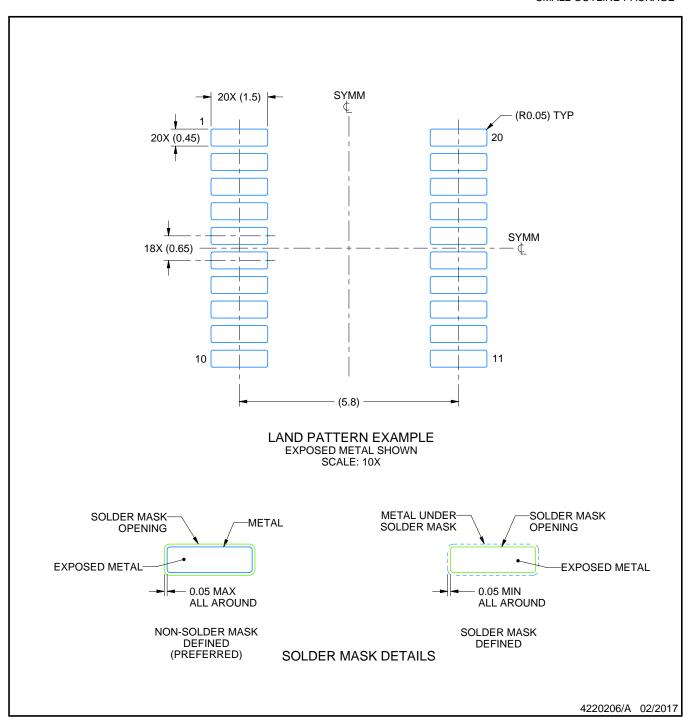


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

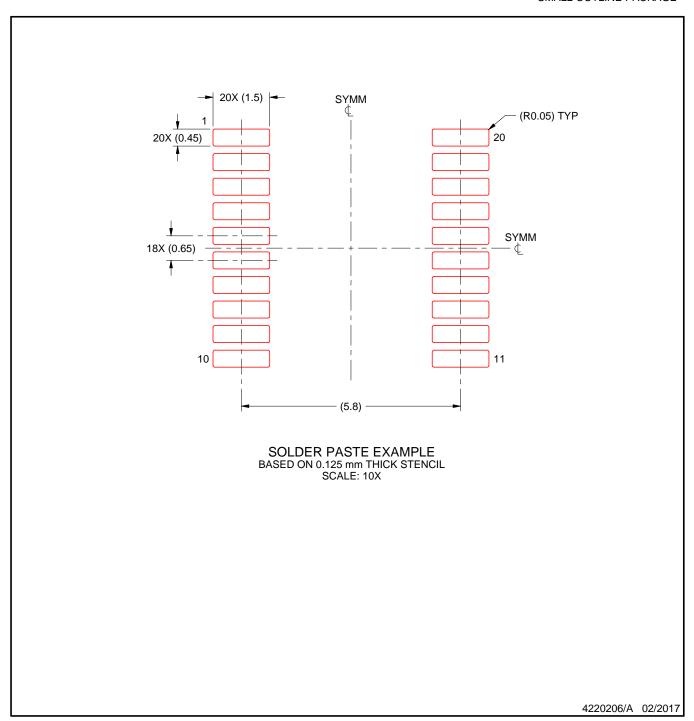

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.





SOIC



## NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025