

CSD25501F3 -20V P チャネル FemtoFET™ MOSFET

1 特長


- 低いオン抵抗
- 非常に低い Q_g および Q_{gd}
- 極めて小さいフットプリント
 - 0.7mm × 0.6mm
- 薄型
 - 最大高 0.22mm
- ESD 保護ダイオード搭載
- 鉛およびハロゲン不使用
- RoHS に準拠

2 アプリケーション

- ロード・スイッチ・アプリケーションに最適
- バッテリ・アプリケーション
- ハンドヘルドおよびモバイル・アプリケーション

3 概要

この -20V、64mΩ、P チャネル FemtoFET™ MOSFET は、さまざまなハンドヘルドおよびモバイル アプリケーション向けに、フットプリントを最小化するよう設計および最適化されています。標準の小信号 MOSFET をこのテクノロジに置き換えて、フットプリントを大幅に減らすことができます。内蔵の 10kΩ クランプ抵抗 (R_c) により、デューティサイクルに応じて、ゲート電圧 (V_{GS}) を最大内部ゲート酸化膜値の -6V より高くして動作できます。 V_{GS} が -6V を超えて上昇すると、ダイオードを経由するゲートのリーク電流 (I_{GSS}) が増加します。

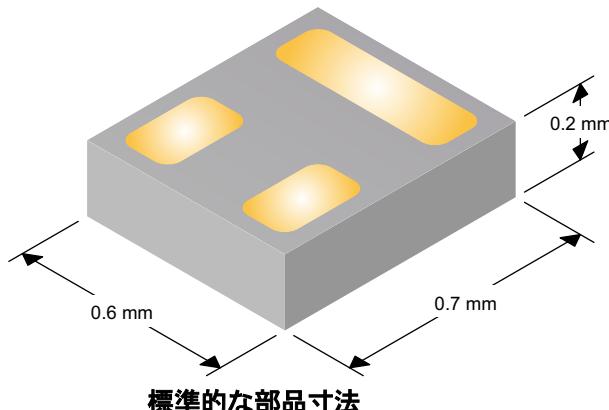

製品概要

$T_A = 25^\circ\text{C}$		標準値		単位
V_{DS}	ドレイン - ソース間電圧	-20		V
Q_g	ゲートの合計電荷 (-4.5V)	1.02		nC
Q_{gd}	ゲート-ドレイン間ゲート電荷	0.09		nC
$R_{DS(on)}$	ドレイン - ソース間 オン抵抗	$V_{GS} = -1.8\text{V}$	120	mΩ
		$V_{GS} = -2.5\text{V}$	86	
		$V_{GS} = -4.5\text{V}$	64	
$V_{GS(th)}$	スレッショルド電圧	-0.75		V

製品情報

デバイス ⁽¹⁾	数量	メディア	パッケージ	出荷形態
CSD25501F3	3000	7インチリール	Femto 0.73mm × 0.64mm LGA (Land Grid Array)	テープ および リール
CSD25501F3T	250			


(1) 利用可能なすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

絶対最大定格

$T_A = 25^\circ\text{C}$ (特に記述のない限り)		値	単位
V_{DS}	ドレイン - ソース間電圧	-20	V
V_{GS}	ゲート - ソース間電圧	-20	V
I_D	連続ドレイン電流 ⁽¹⁾	-3.6	A
I_{DM}	パルスドレイン電流 ^{(1) (2)}	-13.6	A
P_D	消費電力 ⁽¹⁾	500	mW
$V_{(ESD)}$	人体モデル (HBM)	4000	V
	荷電デバイス モデル (CDM)	2000	
T_J, T_{stg}	動作時の接合部温度、 保存温度	-55~150	°C

(1) $R_{\theta JA} = 255^\circ\text{C}/\text{W}$ (標準値、最小限の Cu 取り付け領域を持つ FR4 基板に実装した場合)

(2) パルス幅 ≤ 100μs、デューティ サイクル ≤ 1%。



上面図



このリソースの元の言語は英語です。翻訳は概要を便宜的に提供するもので、自動化ツール（機械翻訳）を使用していることがあり、TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、ti.com で必ず最新の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長	1	5.1 ドキュメントの更新通知を受け取る方法.....	6
2 アプリケーション	1	5.2 サポート・リソース.....	6
3 概要	1	5.3 Trademarks.....	6
4 Specifications	3	5.4 静電気放電に関する注意事項.....	6
4.1 Electrical Characteristics.....	3	5.5 用語集.....	6
4.2 Thermal Information.....	3		
4.3 Typical MOSFET Characteristics.....	4		
5 Device and Documentation Support	6	6 Revision History	6
		7 Mechanical, Packaging, and Orderable Information	7

4 Specifications

4.1 Electrical Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC CHARACTERISTICS					
BV_{DSS}	Drain-to-source voltage $V_{\text{GS}} = 0\text{V}, I_{\text{DS}} = -250\mu\text{A}$	-20			V
I_{DSS}	Drain-to-source leakage current $V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = -16\text{V}$		-50		nA
I_{GSS}	Gate-to-source leakage current $V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = -6\text{V}$		-50		nA
$V_{\text{GS(th)}}$	Gate-to-source threshold voltage $V_{\text{DS}} = V_{\text{GS}}, I_{\text{DS}} = -250\mu\text{A}$	-0.45	-0.75	-1.05	V
$R_{\text{DS(on)}}$	$V_{\text{GS}} = -1.8\text{V}, I_{\text{DS}} = -0.1\text{A}$	120	260		mΩ
	$V_{\text{GS}} = -2.5\text{V}, I_{\text{DS}} = -0.4\text{A}$	86	125		
	$V_{\text{GS}} = -4.5\text{V}, I_{\text{DS}} = -0.4\text{A}$	64	76		
g_{fs}	Transconductance $V_{\text{DS}} = -2\text{V}, I_{\text{DS}} = -0.4\text{A}$		3.4		S
DYNAMIC CHARACTERISTICS					
C_{iss}	Input capacitance	295	385		pF
C_{oss}	Output capacitance $f = 100\text{kHz}$	70	91		pF
C_{rss}	Reverse transfer capacitance	4.1	5.3		pF
R_G	Series gate resistance	33			Ω
R_C	Series clamp resistance	10,000			Ω
Q_g	Gate charge total (-4.5 V)	1.02	1.33		nC
Q_{gd}	Gate charge gate-to-drain	0.09			nC
Q_{gs}	Gate charge gate-to-source	0.45			nC
$Q_{\text{g(th)}}$	Gate charge at V_{th}	0.36			nC
Q_{oss}	Output charge $V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = 0\text{V}$	1.8			nC
$t_{\text{d(on)}}$	Turnon delay time	474			ns
t_r	Rise time $V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = -4.5\text{V}, I_{\text{DS}} = -0.4\text{A}, R_G = 0\Omega$	428			ns
$t_{\text{d(off)}}$	Turnoff delay time	1154			ns
t_f	Fall time	945			ns
DIODE CHARACTERISTICS					
V_{SD}	Diode forward voltage $I_{\text{SD}} = -0.4\text{A}, V_{\text{GS}} = 0\text{V}$	-0.73	-0.95		V
Q_{rr}	Reverse recovery charge $V_{\text{DS}} = -10\text{V}, I_F = -0.4\text{A}, \text{di/dt} = 200\text{A}/\mu\text{s}$	3.0			nC
t_{rr}	Reverse recovery time	7.4			ns

4.2 Thermal Information

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

THERMAL METRIC		TYPICAL VALUES	UNIT
$R_{\theta,\text{JA}}$	Junction-to-ambient thermal resistance ⁽¹⁾	90	°C/W
	Junction-to-ambient thermal resistance ⁽²⁾	255	°C/W

- (1) Device mounted on FR4 material with 1in² (6.45cm²), 2oz (0.071mm) thick Cu.
(2) Device mounted on FR4 material with minimum Cu mounting area.

4.3 Typical MOSFET Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

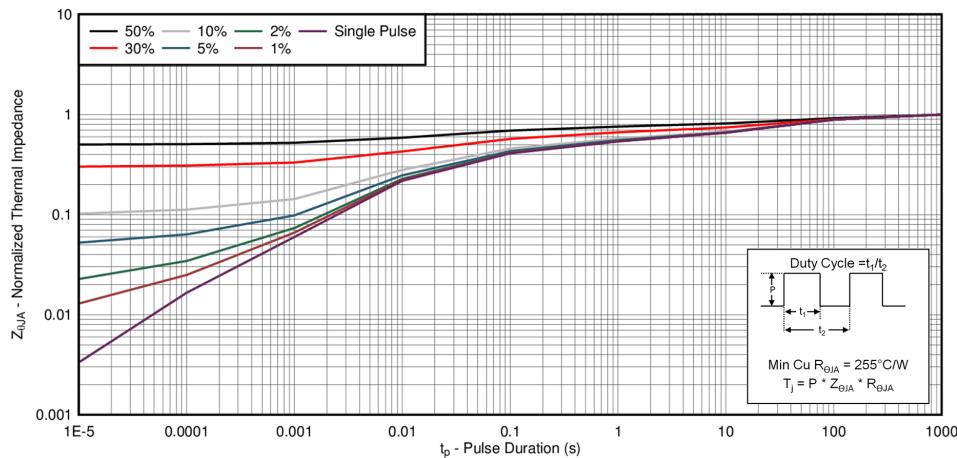


图 4-1. Transient Thermal Impedance

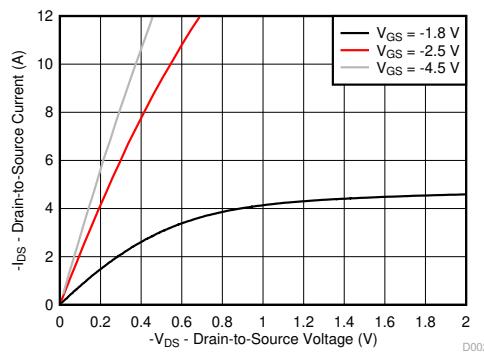


图 4-2. Saturation Characteristics

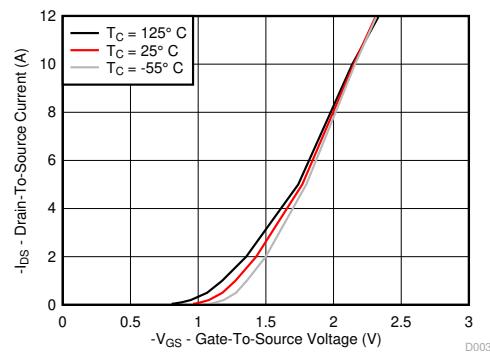


图 4-3. Transfer Characteristics

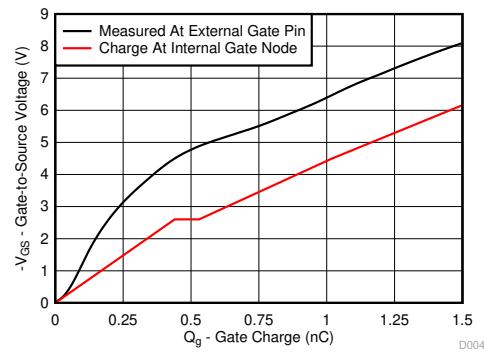


图 4-4. Gate Charge


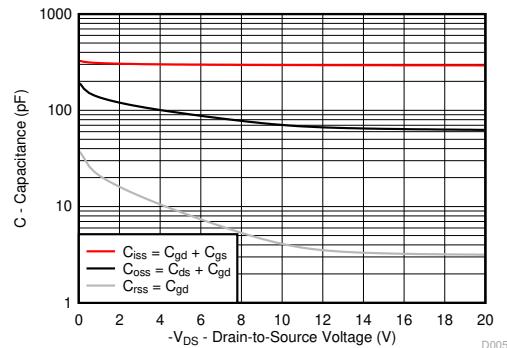


图 4-5. Capacitance

4.3 Typical MOSFET Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise stated)

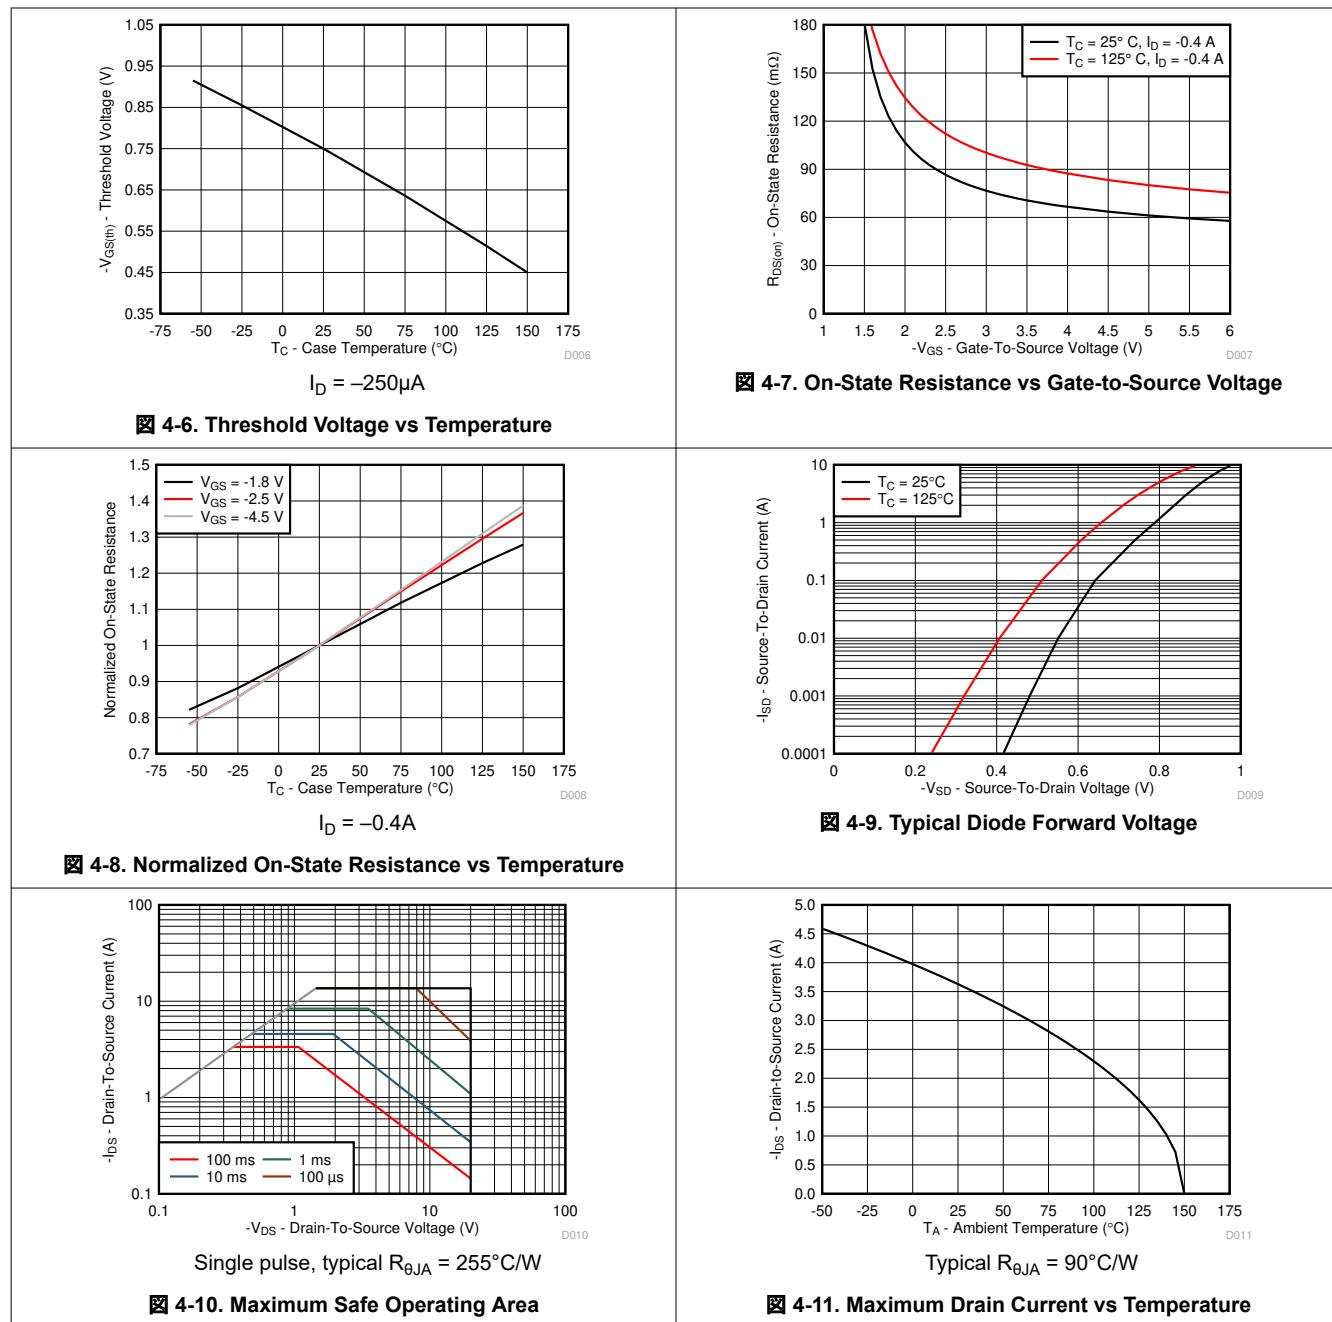

5 Device and Documentation Support

5.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

5.2 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの使用条件を参照してください。

5.3 Trademarks

FemtoFET™ and テキサス・インスツルメンツ E2E™ are trademarks of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

5.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことをお勧めします。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

5.5 用語集

テキサス・インスツルメンツ用語集

この用語集には、用語や略語の一覧および定義が記載されています。

6 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision B (October 2021) to Revision C (June 2024)	Page
• ドキュメント全体にわたって表、図、相互参照の採番方法を更新.....	1

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

表 7-1. Pin Configuration

POSITION	DESIGNATION
Pin 1	Gate
Pin 2	Source
Pin 3	Drain

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ（データシートを含みます）、設計リソース（リファレンス デザインを含みます）、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の默示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または默示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](#) やかかる テキサス・インスツルメンツ製品の関連資料などのいづれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2024, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
CSD25501F3	Active	Production	PICOSTAR (YJN) 3	3000 LARGE T&R	Yes	NIAU	Level-1-260C-UNLIM	-55 to 150	V
CSD25501F3.B	Active	Production	PICOSTAR (YJN) 3	3000 LARGE T&R	Yes	NIAU	Level-1-260C-UNLIM	-55 to 150	V
CSD25501F3T	Active	Production	PICOSTAR (YJN) 3	250 SMALL T&R	Yes	NIAU	Level-1-260C-UNLIM	-55 to 150	V
CSD25501F3T.B	Active	Production	PICOSTAR (YJN) 3	250 SMALL T&R	Yes	NIAU	Level-1-260C-UNLIM	-55 to 150	V

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



YJN003A



PACKAGE OUTLINE

PicoStar™ - 0.22 mm max height

PicoStar™

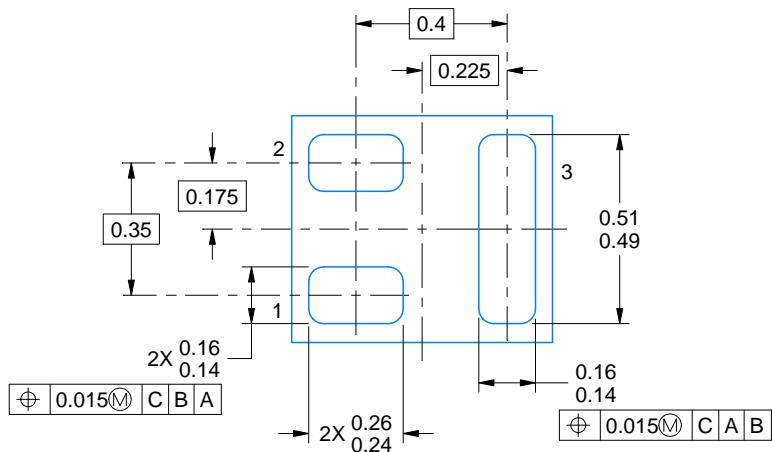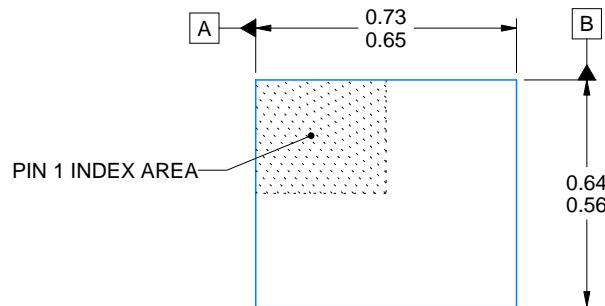

4223685/A 05/2017

NOTES:

PicoStar is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M
2. This drawing is subject to change without notice.
3. This package is a Pb-free bump design. Bump finish may vary. To determine the exact finish, refer to the device datasheet or contact a local TI representative.

EXAMPLE BOARD LAYOUT

YJN0003A

PicoStar™ - 0.22 mm max height

PicoStar™

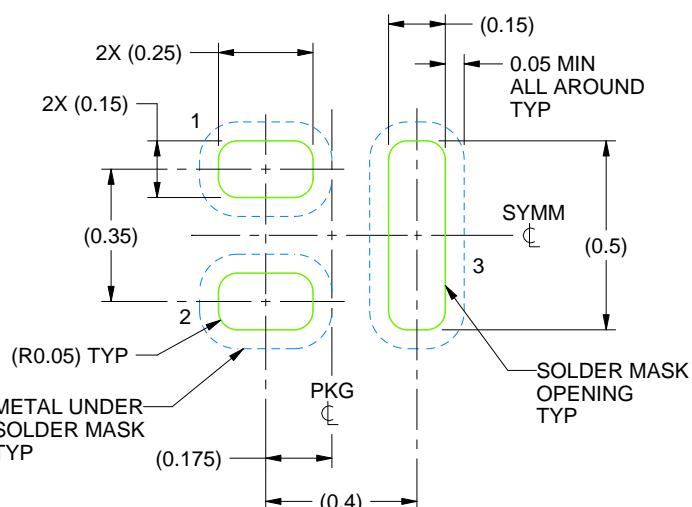

LAND PATTERN EXAMPLE
SOLDER MASK DEFINED
SCALE:50X

4223685/A 05/2017

NOTES: (continued)


4. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).

EXAMPLE STENCIL DESIGN

YJN0003A

PicoStar™ - 0.22 mm max height

PicoStar™

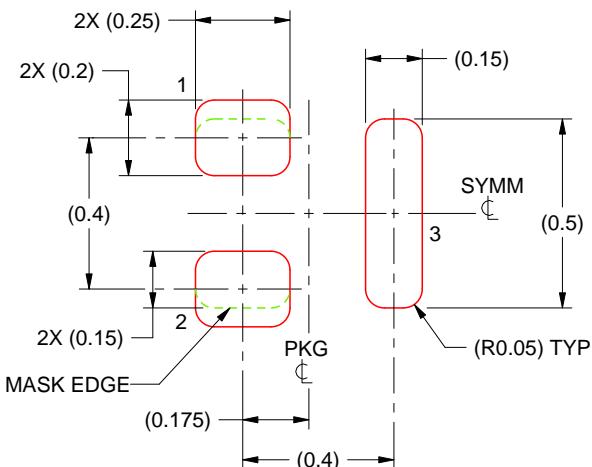

SOLDER PASTE EXAMPLE
BASED ON 0.075 - 0.1 mm THICK STENCIL
SCALE:50X

4223685/A 05/2017

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

TIは、技術データと信頼性データ(データシートを含みます)、設計リソース(リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Webツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の默示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または默示的にかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したもので、(1)お客様のアプリケーションに適した TI 製品の選定、(2)お客様のアプリケーションの設計、検証、試験、(3)お客様のアプリケーションに該当する各種規格や、他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月