OUTPUTS



Data sheet acquired from Harris Semiconductor SCHS100

CMOS Decade Up-Down Counter/Latch/Display Driver

High-Voltage Type (20-V Rating)





Features:


- Separate clock-up and clock-down lines-
- Capable of driving common cathode LEDs and other displays directly
- Allows cascading without any external circuitry
- 100% tested for quiescent current at 20 V
- Maximum input current of 1 μA at 18 V over full packagetemperature range; 100 nA at 18 V and 25° C

■ CD40110B is a dual_clocked up/down counter with a special preconditioning circuit that allows the counter to be clocked, via positive going inputs, up or down regardless of the state or timing (within 100 ns typ.) of the other clock line.

The clock signal is fed into the control logic and Johnson counter after it is preconditioned. The outputs of the Johnson counter (which include anti-lock gating to avoid being locked at an illegal state) are fed into a latch. This data can be fed directly to the decoder through the latch or can be strobed to hold a particular count while the Johnson counter continues to be clocked. The decoder feeds a seven-segment bipolar output driver which can source up to 25 mA to drive LEDs and other displays such as low-voltage fluorescent and incandescent lamps.

A short durating negative-going pulse appears on the BORROW output when the count changes from 0 to 9 or the CARRY output when the count changes from 9 to 0. At the other times the BORROW and CARRY outputs are a logic 1.

The CARRY and BORROW outputs can be tied directly to the clock-up and clock-down lines respectively of another CD40110B for easy cascading of several counters.



CLK UP

CLK DN

RESET

CD40110B Types

- Noise margin (full package-temperature range) =
 - 1 V at V_{DD} = 5 V
 - 2 V at V_{DD} = 10 V
 - 2.5 V at VDD = 15 V
- 5 V, 10 V and 15 V parametric ratings
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices".

Applications:

- Rate comparators
- General counting applications where display is desired
- Up-down counting applications where input pulses are random in nature

The CD40110B types are supplied in 16-lead dual-in-line ceramic packages (D and F suffixes), and 16-lead dual-in-line plastic package (E suffix), and also available in chip form, (H suffix).

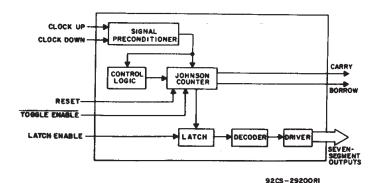


Fig. 1 - Functional diagram.

MAXIMUM RATINGS, Absolute-Maximum Values:	
Voltages referenced to V _{SS} Terminal)	0.5V to +20V
INPUT VOLTAGE RANGE, ALL INPUTS	
DC INPUT CURRENT, ANY ONE INPUT	±10mA
For T _A = -55°C to +100°C	500mW
For T _A = +100°C to +125°C	Derate Linearity at 12mW/°C to 200mW
For T _A = -55°C to +100°C For T _A = +100°C to +125°C DEVICE DISSIPATION PER OUTPUT TRANSISTOR FOR T _A = FULL PACKAGE-TEMPERATURE RANGE (All Package Types)	
FOR TA = FULL PACKAGE-TEMPERATURE RANGE (All Package Types)	100mW
OPERATING-TEMPERATURE RANGE (TA)	55°C to +125°C
STORAGE TEMPERATURE RANGE (Tstg)	-65°C to +150°C
LEAD TEMPERATURE (DURING SOLDERING):	
STORAGE TEMPERATURE RANGE (T_{stg})	+265°C

RECOMMENDED OPERATING CONDITIONS

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

	CHARACTERISTIC	TO SERVICE OF THE SER	V _{DD}	LIM MIN.	ITS MAX.	UNITS
Supply-Voltage Range (For TA =	Full Package Temperate	ure Range)	_	3	18	V
Clock Input Frequency (Sum of CLUP & CLDN Freqs.)	fcL	inger til general som en skriver so Linguage som en skriver som en	5 10 15		1 3 5	MHz
Clock Pulse Width tw			5 10 15	110 40 30	111	
Latch Enable Pulse Width	N	100 (100 (100 (100 (100 (100 (100 (100	5 10 15	110 30 24	1 1 1	· Service
Reset Removal-Time		angur Niger ti di kula	5 10 15		- -	erre (n. 1900) 1000 - August II. 1900 - August II.
Reset Pulse Width			5 10 15	350 170 120	=	

entropy of the second of the s

STATIC ELECTRICAL CHARACTERISTICS

	Conditions				LIMITS AT INDICATED TEMPERATURES (°C)						1 deplace		
Characteristic				,		LIMITS	AT INDICA	TED TEM	PERATUR			Units	
	IOH (mA)	Vон (V)	V _{IN}	V _{DD} (V)	-55	-40	+85	+125	Min.	+25 Typ.	Max.		
		` '					450	450			_	···	
Quiescent Device				5	5	5	150	150		0.04 0.04	5 10		
Current -				10	10	10	300	300		0.04	20	μΑ	
Max. I _{DD}	=			15 20	100	20 100	600 3000	600 3000	=	0.04	100		
Output Voltage			0,5	5			.05			0	0.05		
Low-Level			0,10	10			.05			0	∣0.05	V	
Max. V _{OŁ}		-	0,15	15		0.	.05			0	0.05		
		<u> </u>	0,5	5	_	_		_	_	4.55			
High-Level Min. VOH	_	_	0,10	10						9.55		V	
Min. VOH	_	_	0,15	15			_			14.55		·	
<u> </u>		I					_						
Input Low Voltage	_	0.5, 3.8		5			.5				1.5	v	
Max. VIL		1, 8.8	_	10			3			=	3	V	
*	-	1.5, 13.8		15	<u> </u>	 	4				4		
Innut High Voltage		0.5, 3.8		5		3	3.8		3.5	_	l —		
Input High Voltage Min. VIH		1, 8.8 —		10			7		7			1 v	
WING VIE	_	1.5, 13.8	-	15			1		11				
]			_	_							
	-			Į I		.9		<u>4</u>	3.9	4.5			
	-5					65		.7	3.7	4.3			
	-10			5		55		<u>65</u>	3.65	4.25			
	-15		=			3.5 3.5 3.45 3.35		.5 0F	3.6	4.15		‡	
	-20 -25	 	-			.4	3.3		3.45 3,4	3.9			
	-23					75		.s 85	8.75	9.5			
7-Segment Outputs				10			45		55	8.55	9.3		
Output Drive	-10	 					42		.5	8.5	9.25		
Voltage, High	-15	_	_			.4		47	8.47	9.2	-	V	
Min. VOH	-20				t		.4		40	8.45	9.1	 _ -	ŀ
141111. YOH	-25	 		1		.3		25	8.3	9	<u> </u>		
				 		3.8		3.9	13.8	14.5	_		
	-5	<u> </u>		Ī	13	.65		.75	13.75	14.35	_	1	
	-10		_	15		3.6		.72	13.72	14.3			
	-15		_] '3	13	3.6	10	3.7	13.7	14.2			
	-20	_	_]	13	3.6	13	3.6	13.65	14.1			
	-25		·		13	3.3	13	.25	13.3	14.0			
7-Segment Outputs		'		_			A .						
Output Low		0.4	0,5	5	1.28	1.22	0.84	0.72	1	2			
(Sink) Current	<u> </u>	0.5	0, 10	10	3.2	3	2.2	1.8	2.6	5.2		ĺ	
Min. IOL	-	1.5	0, 15	15	8.4	8	5.6	4.8	6.8	13.6	_	}	
Comme October 1	1				 					- :	1	Ì	
Carry Outputs Output Low (Sink) Current Min. IOL		0.4	0,5	5	0.64	0.61	0.42	0.36	0.51	1			
		0.5	0, 10	10	1.6	1.5	1.1	0.9	1.3	2.6		mA	
	_	1.5	0, 15	15	4.2	4	2.8	2.4	3.4	6.8	_		
Output High	_	4.6	0, 5	5	-0.64	-0.61	-0.42	-0.36	-0.51	-1			
(Source) Current		2.5	0, 5	5	-2	-1.8	-1.3	-1.15	-1.6	-3.2		ļ	
Min. IOH		9.5	0, 10	10	-1.6	-1.5	-1.1	-0.9	-1.3	-2.6	_	l	
3	_	13.5	0, 15	15	-4.2	-4	-2.8	-2.4	-3.4	-6.8	-		
Input Current Max. I _{IN}	-	0, 18	0, 18	18	±0.1	±0.1	±1	±1		±10 ⁻⁵	±0.1	μΑ	

 $[\]blacksquare$ 0(10 μ A)

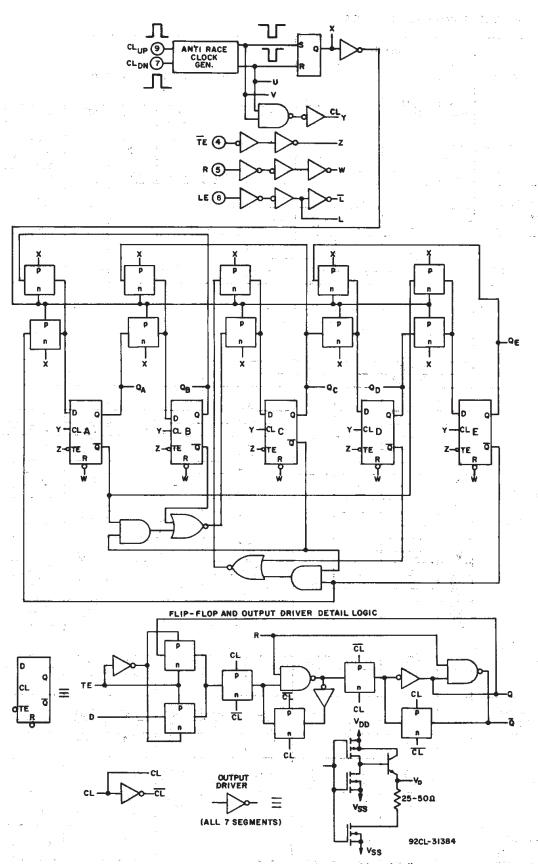


Fig. 2 - Logic diagram with flip-flop and output-driver details. (cont'd on page 5)



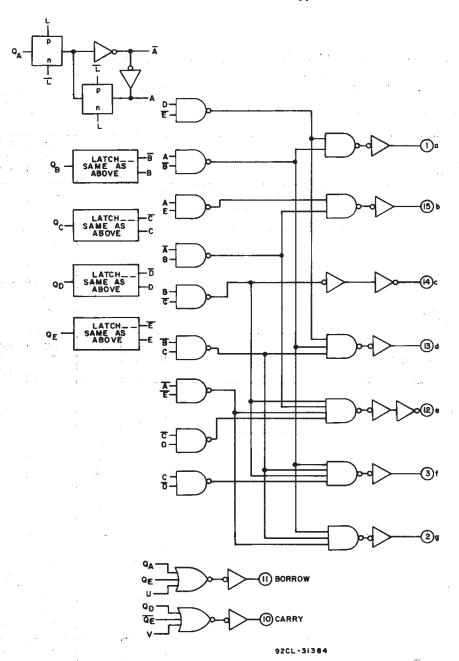


Fig. 2 - Logic diagram with flip-flop and output-driver details.

DISPLAY SEGMENTS



TERMINAL ASSIGNMENT



DYNAMIC ELECTRICAL CHARACTERISTICS at TA = 25° C, input $t_{\rm f}$, $t_{\rm f}$ = 20 ns, CL = 50 pF, RL = 200 k Ω

CHARACTERISTI	V _{DD}	MIN.	LIMITS TYP.	MAX.	UNITS	
Clock Up/Clock Down						
Propagation Delay Time: Clock to Carry or Borrow	^t PLH, ^t PHL	5 10 15	<u>-</u> <u>:</u>	300 100 70	600 200 140	
Clock to Segment	tPLH, tPHL	5 10 15	_ 	925 360 250	1850 720 500	ns
Minimum Clock Pulse Width		5 10 15	_ _ _	55 20 15	110 40 30	
Maximum Clock Input Frequency (Sum of CLup & CLDN F)	fcL	5 10 15	1 3 5	2.5 6 8.5	_ _ _	MHz
Minimum Toggle Enable Pulse Width		5 10 15	_ 	175 75 55	350 150 110	
Minimum Latch Enable Pulse Width		5 10 15	_ _ _	55 15 12	110 30 24	
Output Pulse Width: Carry		5 10 15	115 60 40	230 120 75	_	
Borrow		5 10 15	140 65 45	275 130 85		ns
Transition Time: Carry or Borrow	tTLH, tTHL	5 10 15	_ _ _	85 45 30	170 90 60	
Minimum Delay Time Between CLUP & CLDN		5 10 15	_ _	100 80 60	_ _ _	
Maximum Clock Rise or Fall Time	t _r CL, t _f CL	5 10 15	<u>-</u> -	<u>-</u>	15 15 15	μs
Reset						
Propagation Delay Time Reset to Output	tPLH, tPHL	5 10 15	-	650 350 160	1300 700 320	
Minimum Reset Removal Time	·	5 10 15	_ _ _	-275 -100 -65	0 0 0	ns
Minimum Reset Pulse Width		5 10 15		175 85 60	350 170 120	

TRUTH TABLE

CLOCK UP*	CLOCK DOWN *	LATCH ENABLE	TOGGLE ENABLE	RESET	COUNTER	DISPLAY
	x	0	0	0	Increments by 1	Follows Counter
Х		0	0	0	Decrements by 1	Follows Counter
		×	X	0	No Change	No Change
X	X	1 1	×	1	Goes to 00000	Remains Fixed
X	×	0	х	1 (\$4.75)	Goes to 00000	Follows Counter (Display = 1/7)
. X .	X	х	1	0	Inhibited	Remains Fixed
	х	1	0	0	Increments by 1	Remains Fixed
. X		1	0	0	Decrements by 1	Remains Fixed

X = Don't Care

^{*} Typically 100 ns between clock-up and clock-down positive transitions are required to ensure proper counting.




Fig. 3 - Typical carry or borrow output low (sink) current characteristics.




Fig. 5 - Typical carry or borrow output high (source) current characteristics.




Fig. 4 - Minimum carry or borrow output low (sink) current characteristics.




Fig. 6 - Minimum carry or borrow output high (source) current characteristics.

^{1 =} High State

^{0 =} Low State




Fig. 7 - Typical carry or borrow transition time vs. load capacitance.




Fig. 9 - Voltage across bipolar transistor vs. output source current.




Fig. 11 - Dynamic power dissipation test circuit.




Fig. 13 - Input current.




Fig. 8 - Typical carry or borrow propagation delay time vs. load capacitance.




Fig. 10 - Typical dynamic power dissipation vs. frequency.




Fig. 12 - Quiescent device current.




Fig. 14 - Input voltage.





Fig. 15 - Cascading diagram.



Dimensions and pad layout for CD40110B.

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10⁻³ inch).

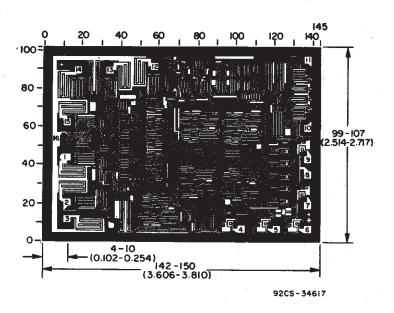

PACKAGE OPTION ADDENDUM

10-Dec-2020

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
							(6)				
CD40110BE	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD40110BE	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 25-Aug-2023

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
CD40110BE	N	PDIP	16	25	506	13.97	11230	4.32
CD40110BE	N	PDIP	16	25	506	13.97	11230	4.32

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated