SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003


- Wide Operating Voltage Range of 2 V to 6 V
- Outputs Can Drive Up To 10 LSTTL Loads
- Low Power Consumption, 80-μA Max I<sub>CC</sub>
- Typical t<sub>pd</sub> = 13 ns
- ±4-mA Output Drive at 5 V
- Low Input Current of 1 μA Max
- Single Down/Up Count-Control Line
- Look-Ahead Circuitry Enhances Speed of Cascaded Counters
- Fully Synchronous in Count Modes
- Asynchronously Presettable With Load Control

#### description/ordering information


The 'HC191 devices are 4-bit synchronous, reversible, up/down binary counters. Synchronous counting operation is provided by having all flip-flops clocked simultaneously so that the outputs change coincident with each other when instructed by the steering logic. This mode of operation eliminates the output counting spikes normally associated with asynchronous (ripple-clock) counters.

The outputs of the four flip-flops are triggered on a low- to high-level transition of the clock (CLK) input if the count-enable ( $\overline{CTEN}$ ) input is low. A high at  $\overline{CTEN}$  inhibits counting. The direction of the count is determined by the level of the down/up (D/ $\overline{U}$ ) input. When D/ $\overline{U}$  is low, the counter counts up, and when D/ $\overline{U}$  is high, it counts down.

SN54HC191 . . . J OR W PACKAGE SN74HC191 . . . D, N, OR NS PACKAGE (TOP VIEW)



SN54HC191 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

#### **ORDERING INFORMATION**

TA	PACKA	GE†	ORDERABLE PART NUMBER	TOP-SIDE MARKING		
	PDIP – N	Tube of 25	SN74HC191N	SN74HC191N		
		Tube of 40	SN74HC191D			
-40°C to 85°C	SOIC - D	Reel of 2500	SN74HC191DR	HC191		
		Reel of 250	SN74HC191DT			
	SOP - NS	Reel of 2000	SN74HC191NSR	HC191		
	CDIP – J	Tube of 25	SNJ54HC191J	SNJ54HC191J		
–55°C to 125°C	CFP – W	Tube of 150	SNJ54HC191W	SNJ54HC191W		
	LCCC - FK	Tube of 55	SNJ54HC191FK	SNJ54HC191FK		

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003

#### description/ordering information (continued)


These counters feature a fully independent clock circuit. Change at the control ( $\overline{\text{CTEN}}$  and  $D/\overline{U}$ ) inputs that modifies the operating mode have no effect on the contents of the counter until clocking occurs. The function of the counter is dictated solely by the condition meeting the stable setup and hold times.

These counters are fully programmable; that is, each of the outputs can be preset to either level by placing a low on the load (LOAD) input and entering the desired data at the data inputs. The output changes to agree with the data inputs independently of the level of CLK. This feature allows the counters to be used as modulo-N dividers simply by modifying the count length with the preset inputs.

Two outputs are available to perform the cascading function: ripple clock  $(\overline{RCO})$  and maximum/minimum (MAX/MIN) count. MAX/MIN produces a high-level output pulse with a duration approximately equal to one complete cycle of the clock while the count is zero (all outputs low) counting down, or maximum (9 or 15) counting up.  $\overline{RCO}$  produces a low-level output pulse under those same conditions, but only while CLK is low. The counters can be cascaded easily by feeding  $\overline{RCO}$  to  $\overline{CTEN}$  of the succeeding counter if parallel clocking is used, or to CLK if parallel enabling is used. MAX/MIN can be used to accomplish look ahead for high-speed operation.



## logic diagram (positive logic)

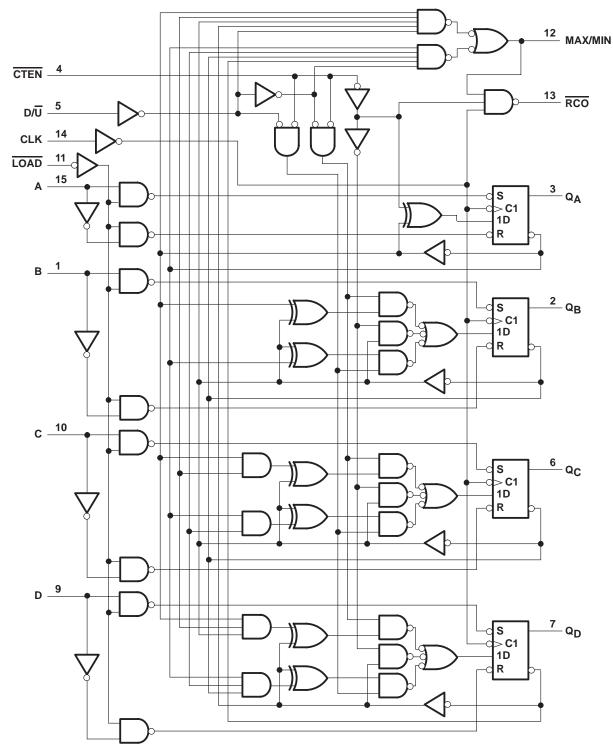


Pin numbers shown are for the D, J, N, NS, and W packages.

#### typical load, count, and inhibit sequence

The following sequence is illustrated below:

- 1. Load (preset) to binary 13
- 2. Count up to 14, 15 (maximum), 0, 1, and 2
- 3. Inhibit
- 4. Count down to 1, 0 (minimum), 15, 14, and 13

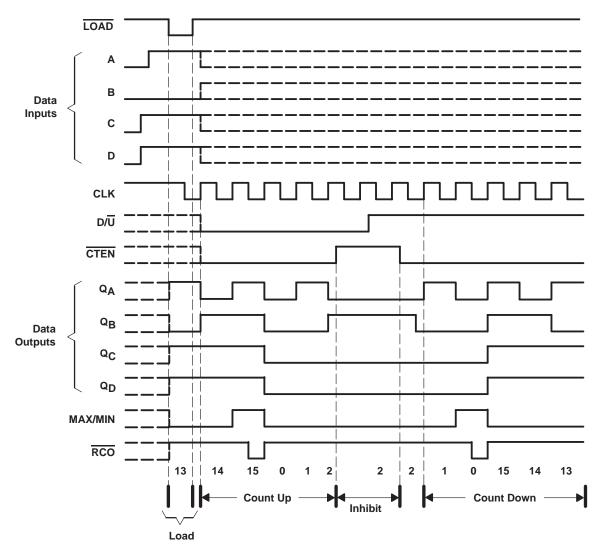



SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		0.5 V to 7 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ) (see	ee Note 1)	±20 mA
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CO}$	c) (see Note 1)	±20 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )		±25 mA
Continuous current through V <sub>CC</sub> or GND		
Package thermal impedance, θ <sub>JA</sub> (see Note 2):		
,	N package	67°C/W
	NS package	64°C/W
Storage temperature range, T <sub>stg</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

2. The package thermal impedance is calculated in accordance with JESD 51-7.

#### recommended operating conditions (see Note 3)

			N2	N54HC19	)1	SN	174HC19	)1	
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
Vcc	Supply voltage		2	5	6	2	5	6	V
		V <sub>CC</sub> = 2 V	1.5			1.5			
VIH	High-level input voltage	V <sub>CC</sub> = 4.5 V	3.15			3.15			V
		VCC = 6 V	4.2			4.2			
		V <sub>CC</sub> = 2 V			0.5			0.5	
VIL	Low-level input voltage	V <sub>CC</sub> = 4.5 V			1.35			1.35	V
		VCC = 6 V			1.8			1.8	
VI	Input voltage		0		VCC	0		VCC	V
Vo	Output voltage		0		VCC	0		VCC	V
		V <sub>CC</sub> = 2 V			1000			1000	
Δt/Δv‡	Input transition rise/fall time	V <sub>CC</sub> = 4.5 V			500			500	ns
		V <sub>CC</sub> = 6 V			400			400	
TA	Operating free-air temperature		-55		125	-40		85	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>‡</sup> If this device is used in the threshold region (from V<sub>IL</sub>max = 0.5 V to V<sub>IH</sub>min = 1.5 V), there is a potential to go into the wrong state from induced grounding, causing double clocking. Operating with the inputs at t<sub>t</sub> = 1000 ns and V<sub>CC</sub> = 2 V does not damage the device; however, functionally, the CLK inputs are not ensured while in the shift, count, or toggle operating modes.

SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEOT 0.0	NIDITIONO	.,	Т	A = 25°C	;	SN54H	IC191	SN74H	C191	LINUT
PARAMETER	TEST CC	ONDITIONS	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V	1.9	1.998		1.9		1.9		
		I <sub>OH</sub> = -20 μA	4.5 V	4.4	4.499		4.4		4.4		
Voн	VI = VIH or VIL		6 V	5.9	5.999		5.9		5.9		V
		$I_{OH} = -4 \text{ mA}$	4.5 V	3.98	4.3		3.7		3.84		
		$I_{OH} = -5.2 \text{ mA}$	6 V	5.48	5.8		5.2		5.34		
			2 V		0.002	0.1		0.1		0.1	
		$I_{OL} = 20 \mu\text{A}$	4.5 V		0.001	0.1		0.1		0.1	
VoL	VI = VIH or VIL		6 V		0.001	0.1		0.1		0.1	V
		I <sub>OL</sub> = 4 mA	4.5 V		0.17	0.26		0.4		0.33	
		I <sub>OL</sub> = 5.2 mA	6 V		0.15	0.26		0.4		0.33	
lį	$V_I = V_{CC}$ or 0		6 V	·	±0.1	±100		±1000		±1000	nA
ICC	$V_I = V_{CC}$ or 0,	IO = 0	6 V			8		160		80	μΑ
Ci		_	2 V to 6 V		3	10		10		10	pF

SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003

# timing requirements over recommended operating free-air temperature range (unless otherwise noted)

				T <sub>A</sub> = 2	25°C	SN54H	IC191	SN74H	IC191	
			VCC	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
			2 V		4.2		2.8		3.3	
fclock	Clock frequency		4.5 V		21		14		17	MHz
			6 V		24		16		19	
			2 V	120		180		150		
		LOAD low	4.5 V	24		36		30		
	Dulas dunation			21		31		26		
t <sub>W</sub>	Pulse duration		2 V	120		180		150		ns
		CLK high or low	4.5 V	24		36		30		
			6 V	21		31		26		
			2 V	150		230		188		
		Data before LOAD↑	4.5 V	30		46		38		
			6 V	25		38		32		
			2 V	205		306		255		
		CTEN before CLK↑	4.5 V	41		61		51		
			6 V	35		53		44		
t <sub>su</sub>	Setup time		2 V	205		306		255		ns
		D/U before CLK↑	4.5 V	41		61		51		
			6 V	35		53		44		
			2 V	150		225		190		
		LOAD inactive before CLK↑	4.5 V	30		45		38		
			6 V	25		38		32		
			2 V	5		5		5		
		Data after LOAD↑	4.5 V	5		5		5		
			6 V	5		5		5		
			2 V	5		5		5		
th	Hold time	CTEN after CLK↑	4.5 V	5		5		5		ns
			6 V	5		5		5		
			2 V	5		5		5		
		D/U after CLK↑	4.5 V	5		5		5		
			6 V	5		5		5		

SCLS121D - DECEMBER 1982 - REVISED OCTOBER 2003

# switching characteristics over recommended operating free-air temperature range, $C_L$ = 50 pF (unless otherwise noted) (see Figure 1)


	FROM	то		T,	Δ = 25°C	;	SN54H	IC191	SN74H	C191							
PARAMETER	(INPUT)	(OUTPUT)	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT						
			2 V	4.2	8		2.8		3.3								
fmax			4.5 V	21	42		14		17		MHz						
			6 V	24	48		16		19								
			2 V		130	264		396		330							
	LOAD	Any Q	4.5 V		40	53		79		66							
			6 V		33	45		67		56							
			2 V		135	240		360		300							
	A, B, C, or D	$Q_A$ , $Q_B$ , $Q_C$ , or $Q_D$	4.5 V		36	48		72		60							
		о, <b>ч</b> р	6 V		30	41		61		51							
			2 V		58	120		180		150							
		RCO	4.5 V		17	24		36		30							
			6 V		14	21		31		26							
			2 V		107	192		288		240							
	CLK	Any Q	4.5 V		31	38		58		48							
4			6 V		26	32		49		41							
<sup>t</sup> pd			2 V		123	252		378		315	ns						
		MAX/MIN	4.5 V		39	50		76		63							
			6 V		32	43		65		54							
			2 V		102	228		342		285							
		RCO	RCO	RCO	RCO	RCO	RCO	RCO	4.5 V		29	46		68		57	
	D/ <del>U</del>		6 V		24	38		59		49							
	D/U		2 V		86	192		288		240							
		MAX/MIN	4.5 V		24	38		58		48							
			6 V		20	32		49		41							
			2 V		50	132		198		165							
	CTEN	RCO	4.5 V		15	26		40		33							
			6 V		13	23		34		28							
			2 V		38	75		110		95							
t <sub>t</sub>		Any	4.5 V		8	15		22		19	ns						
			6 V		6	13		19		16							

## operating characteristics, $T_A = 25^{\circ}C$

	PARAMETER	TEST CONDITIONS	TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance	No load	50	pF



#### PARAMETER MEASUREMENT INFORMATION

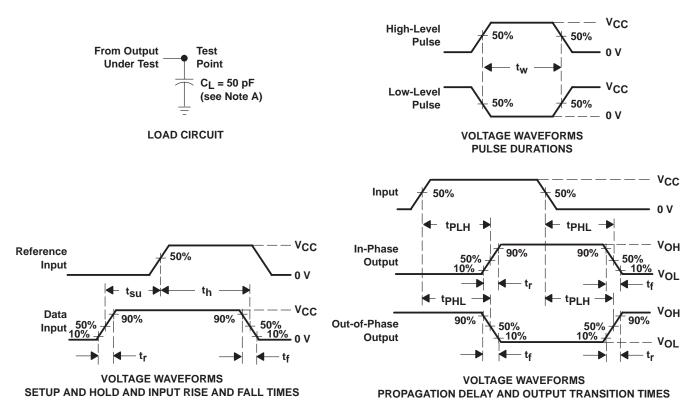

NOTES: A. C<sub>I</sub> includes probe and test-fixture capacitance.

- B. Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50 \Omega$ ,  $t_f = 6$  ns,  $t_f = 6$  ns.
- C. For clock inputs,  $f_{\text{max}}$  is measured when the input duty cycle is 50%.
- D. The outputs are measured one at a time with one input transition per measurement.
- E. tpLH and tpHL are the same as tpd.

Figure 1. Load Circuit and Voltage Waveforms

www.ti.com 16-Apr-2024

#### **PACKAGING INFORMATION**

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-86891012A	ACTIVE	LCCC	FK	20	55	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 86891012A SNJ54HC 191FK	Samples
5962-8689101EA	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8689101EA SNJ54HC191J	Samples
SN54HC191J	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	SN54HC191J	Samples
SN74HC191DR	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC191	Samples
SN74HC191N	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	SN74HC191N	Samples
SN74HC191NSR	ACTIVE	SO	NS	16	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	HC191	Samples
SNJ54HC191FK	ACTIVE	LCCC	FK	20	55	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 86891012A SNJ54HC 191FK	Samples
SNJ54HC191J	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8689101EA SNJ54HC191J	Samples

<sup>&</sup>lt;sup>(1)</sup> The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

### PACKAGE OPTION ADDENDUM

www.ti.com 16-Apr-2024

- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54HC191, SN74HC191:

Catalog: SN74HC191

Military: SN54HC191

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 16-Apr-2024

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74HC191DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74HC191NSR	so	NS	16	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1

www.ti.com 16-Apr-2024



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74HC191DR	SOIC	D	16	2500	340.5	336.1	32.0
SN74HC191NSR	SO	NS	16	2000	356.0	356.0	35.0

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 16-Apr-2024

#### **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-86891012A	FK	LCCC	20	55	506.98	12.06	2030	NA
SN74HC191N	N	PDIP	16	25	506	13.97	11230	4.32
SN74HC191N	N	PDIP	16	25	506	13.97	11230	4.32
SNJ54HC191FK	FK	LCCC	20	55	506.98	12.06	2030	NA

## D (R-PDS0-G16)

#### PLASTIC SMALL OUTLINE



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



#### **MECHANICAL DATA**

## NS (R-PDSO-G\*\*)

## 14-PINS SHOWN

#### PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



## 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

## N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SOP



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing
- per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.



SOF



#### NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOF



#### NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated