




FEATURES

- Controlled Baseline
 - One Assembly/Test Site, One Fabrication Site
- Enhanced Diminishing Manufacturing Sources (DMS) Support
- Enhanced Product-Change Notification
- Qualification Pedigree⁽¹⁾
- Operates From 1.65-V to 3.6-V V_{CC}
- Max t_{nd} of 2.8 ns at 3.3-V V_{CC}
- ±24-mA Output Drive at 3.3-V V_{CC}
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)
- (1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

PW PACKAGE (TOP VIEW)



DESCRIPTION/ORDERING INFORMATION

This octal buffer/line driver is designed for 1.65-V to 3.6-V V_{CC} operation.

The SN74ALVC244 is organized as two 4-bit line drivers with separate output-enable (\overline{OE}) inputs. When \overline{OE} is low, the device passes data from the A inputs to the Y outputs. When \overline{OE} is high, the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down, \overline{OE} shall be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

ORDERING INFORMATION

T _A	PACKAGE ⁽¹⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING	
-40°C to 85°C	TSSOP - PW	Tape and reel	SN74ALVC244IPWREP	VA244IEP	

(1) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



FUNCTION TABLE (each buffer)

INP	INPUTS						
ŌĒ							
L	Н	Н					
L	L	L					
Н	Χ	Z					

LOGIC DIAGRAM (POSITIVE LOGIC)

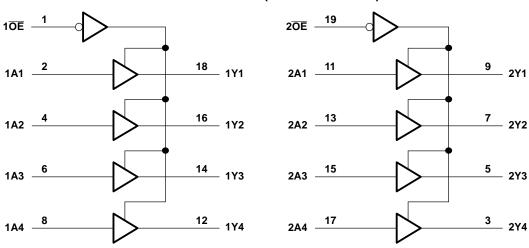

ABSOLUTE MAXIMUM RATINGS(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC}	Supply voltage range		-0.5	4.6	V
VI	Input voltage range ⁽²⁾		-0.5	4.6	V
Vo	Output voltage range ⁽²⁾⁽³⁾		-0.5	V _{CC} + 0.5	V
I _{IK}	Input clamp current	V _I < 0		-50	mA
I _{OK}	Output clamp current	V _O < 0		-50	mA
Io	Continuous output current	·		±50	mA
	Continuous current through V _{CC} or GND			±100	mA
θ_{JA}	Package thermal impedance ⁽⁴⁾		83	°C/W	
T _{stg}	Storage temperature range		-65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.
- 3) This value is limited to 4.6 V maximum.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.



SN74ALVC244-EP OCTAL BUFFER/DRIVER WITH 3-STATE OUTPUTS

RECOMMENDED OPERATING CONDITIONS(1)

			MIN	MAX	UNIT
V _{CC}	Supply voltage		1.65	3.6	V
		V _{CC} = 1.65 V to 1.95 V	0.65 × V _{CC}		
V_{IH}	High-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V
		V _{CC} = 2.7 V to 3.6 V	2		
		V _{CC} = 1.65 V to 1.95 V		$0.35 \times V_{CC}$	
V_{IL}	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V
	Input voltage	V _{CC} = 2.7 V to 3.6 V		0.8	
VI	Input voltage		0	3.6	V
Vo	Output voltage		0	V_{CC}	V
		V _{CC} = 1.65 V		-4	
	High lavel autout average	V _{CC} = 2.3 V	-12		mA
IOH	High-level output current	$V_{CC} = 2.7 \text{ V}$			
	OH High-level output current	V _{CC} = 3 V		-24	
		V _{CC} = 1.65 V		4	
	Low lovel output ourrent	V _{CC} = 2.3 V		12	A
l _{OL}	Low-level output current	V _{CC} = 2.7 V		12	mA
	Supply voltage $ \begin{array}{c} 1. \\ V_{CC} = 1.65 \ \forall \ to \ 1.95 \ \forall \\ 0.65 \times \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.3 \ \forall \ to \ 2.7 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 2.7 \ \forall \ to \ 3.6 \ \forall \\ V_{CC} = 3 \ \forall \ to \ 3.6 \ \forall \ 3.6 \$		24		
Δt/Δν	Input transition rise or fall rate			5	ns/V
T _A	Operating free-air temperature		-40	85	°C

⁽¹⁾ All unused inputs of the device must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.


ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

F	PARAMETER	TEST CO	ONDITIONS	V _{CC}	MIN	TYP ⁽¹⁾	MAX	UNIT			
		I_{OH} = -100 μ A		1.65 V to 3.6 V	V _{CC} - 0.2						
		$I_{OH} = -4 \text{ mA}$		1.65 V	1.2						
		$I_{OH} = -6 \text{ mA}$		2.3 V	2						
V_{OH}				2.3 V	1.7			V			
	V _{OH} Vol I _I I _{OZ} I _{CC} ΔI _{CC} C _I Control inputs	I _{OH} = -12 mA		2.7 V	2.2						
				3 V	2.4						
$I_{OH} = -100 \mu A$ $I_{OH} = -4 mA$ $I_{OH} = -6 mA$ $I_{OH} = -12 mA$ $I_{OH} = -12 mA$ $I_{OL} = 100 \mu A$ $I_{OL} = 4 mA$ $I_{OL} = 4 mA$ $I_{OL} = 6 mA$ $I_{OL} = 12 mA$ $I_{OL} = 12 mA$ $I_{OL} = 24 mA$ $I_{OL} = 24 mA$ $I_{OL} = 20 mA$ $I_{OL} = 100 \mu A$ $I_{OL} = 1$		3 V	2								
		$I_{OL} = 100 \mu A$		1.65 V to 3.6 V			0.2				
		I _{OL} = 4 mA		1.65 V			0.45				
.,	V _{OL}	I _{OL} = 6 mA		2.3 V			0.4	V			
VOL		I 40 m A		2.3 V			0.7	V			
		1 _{OL} = 12 mA		2.7 V			0.4				
	$\begin{array}{c c} I_{I} & & \\ I_{OZ} & & \\ I_{CC} & & \\ \hline & Control inputs \end{array}$	I _{OL} = 24 mA		3 V			0.55				
I _I		$V_I = V_{CC}$ or GND		3.6 V			±5	μΑ			
l _{OZ}		$V_O = V_{CC}$ or GND		3.6 V			±10	μΑ			
Icc		$V_I = V_{CC}$ or GND,	I _O = 0	3.6 V			10	μΑ			
ΔI_{CC}		One input at V _{CC} - 0.6 V,	Other inputs at V _{CC} or GND	3 V to 3.6 V			750	μΑ			
	Control inputs	V V or CND		2.2.1/		4.5		~F			
Ci	Data inputs	AI = ACC OL GIAD		3.3 V		4.5		pF			
Co	Outputs	$V_O = V_{CC}$ or GND		3.3 V		7.5		pF			

⁽¹⁾ All typical values are at $V_{CC} = 3.3 \text{ V}$, $T_A = 25^{\circ}\text{C}$.

SN74ALVC244-EP OCTAL BUFFER/DRIVER WITH 3-STATE OUTPUTS





SWITCHING CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CC} = ± 0.1	1.8 V 5 V	V _{CC} = ± 0.2		V _{CC} =	2.7 V	V _{CC} = ± 0.3	3.3 V 3 V	UNIT
	(INFOT)	(001F01)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
t _{pd}	Α	Y	1	4.4	1	3.1		3.1	1.1	2.8	ns
t _{en}	ŌĒ	Y	1.8	6.9	1.5	5.4		5.3	1.5	4.5	ns
t _{dis}	ŌE	Y	1.8	5.9	1	4.1		4.4	1.7	4.2	ns


OPERATING CHARACTERISTICS

 $T_A = 25^{\circ}C$

	PARAMETER		TEST CONDITIONS	V _{CC} = 1.8 V TYP	V _{CC} = 2.5 V TYP	V _{CC} = 3.3 V TYP	UNIT	
	Power dissipation capacitance	Outputs enabled	C 0 f 40 MU-	22	23	26		
Cpd	per buffer/driver	Outputs disabled	$C_L = 0$, $f = 10 \text{ MHz}$	1	1	1	pF	




PARAMETER MEASUREMENT INFORMATION



TEST	S 1
t _{pd}	Open
t _{PLZ} /t _{PZL}	V _{LOAD}
t _{PHZ} /t _{PZH}	GND

LOAD CIRCUIT

V	IN	PUT	V	v		В	V
V _{CC}	VI	t _r /t _f	V _M	V _{LOAD}	CL	R _L	$V_{\!\scriptscriptstyle \Delta}$
1.8 V ± 0.15 V	V _{CC}	≤ 2 ns	V _{CC} /2	2×V _{CC}	30 pF	1 k Ω	0.15 V
2.5 V \pm 0.2 V	V _{CC}	≤2 ns	V _{CC} /2	2×V _{CC}	30 pF	500 Ω	0.15 V
2.7 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V
3.3 V \pm 0.3 V	2.7 V	≤2.5 ns	1.5 V	6 V	50 pF	500 Ω	0.3 V

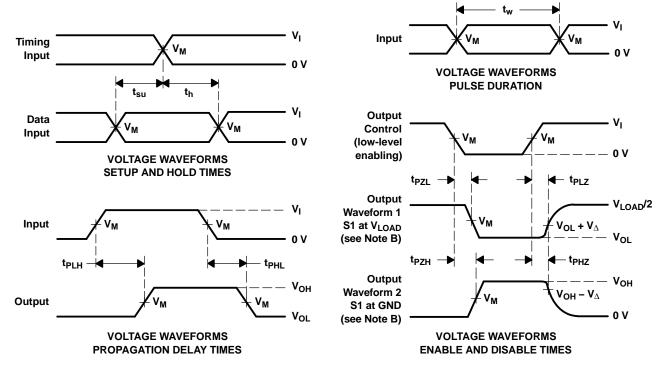

NOTES: A. C_L includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, Z_{Ω} = 50 Ω .
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- F. t_{PZL} and t_{PZH} are the same as t_{en}.
- G. t_{PLH} and t_{PHL} are the same as t_{pd} .
- H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms

11-Nov-2025 www.ti.com

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
SN74ALVC244IPWREP	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VA244IEP
V62/04762-01XE	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	VA244IEP

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF SN74ALVC244-EP:

Catalog: SN74ALVC244

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No. RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2025

NOTE: Qualified Version Definitions:


 $_{\bullet}$ Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	` '	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVC244IPWREP	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1

PACKAGE MATERIALS INFORMATION

www.ti.com 24-Jul-2025

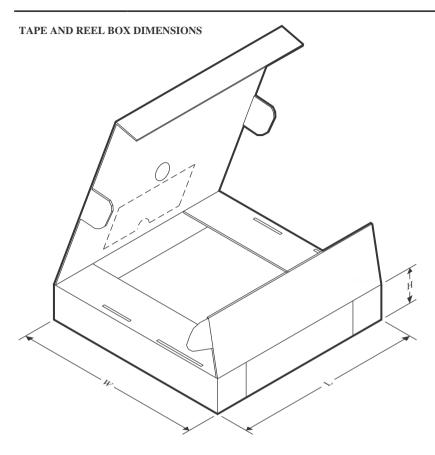


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVC244IPWREP	TSSOP	PW	20	2000	353.0	353.0	32.0



SMALL OUTLINE PACKAGE

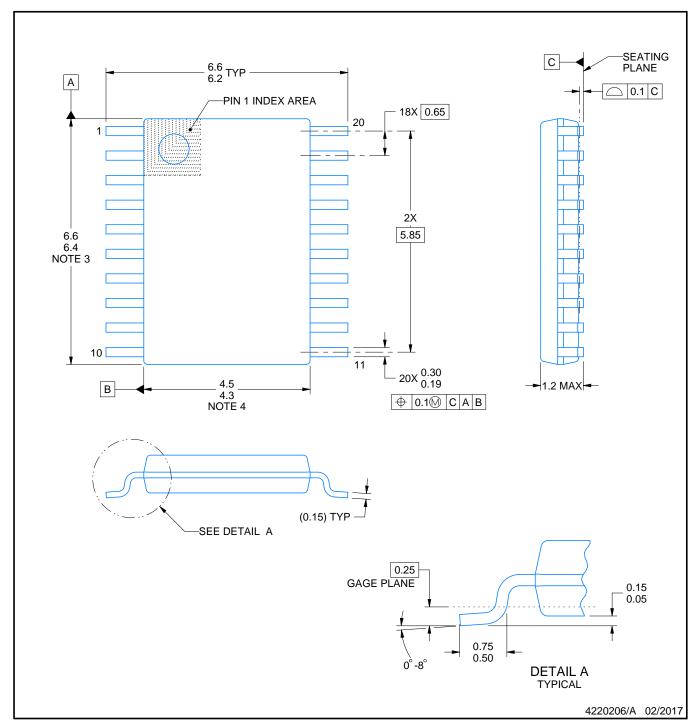

NOTES:


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE

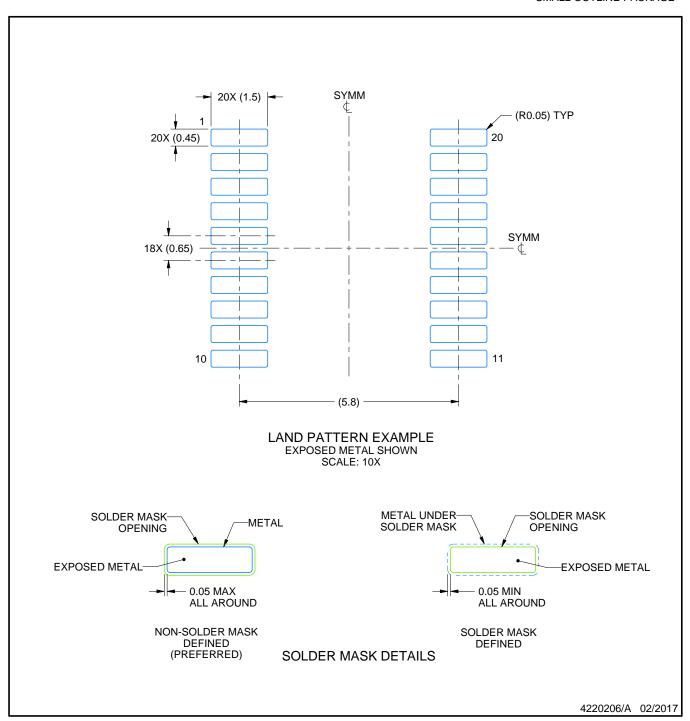


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

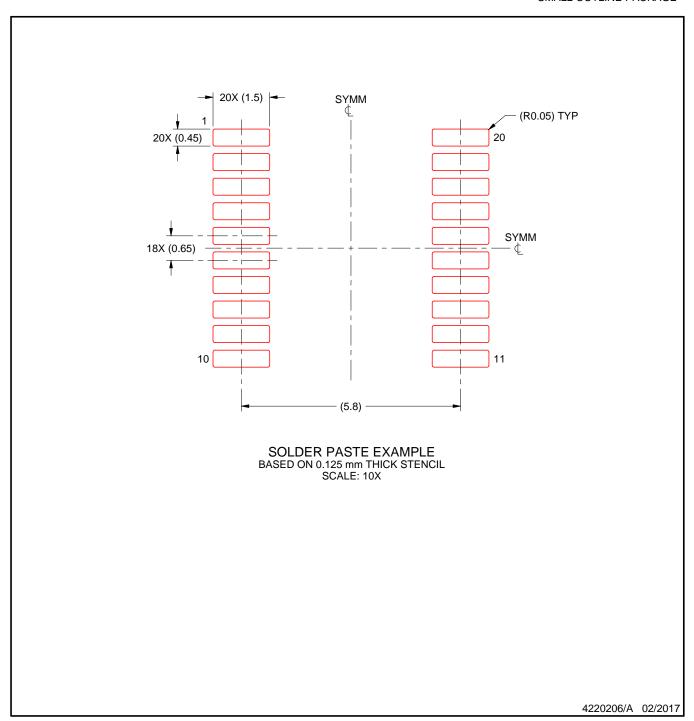

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025