

# SN74LVC1G06 Single Inverter Buffer or Driver With Open-Drain Output

## 1 Features

- ESD protection exceeds JESD 22
  - 2000V human body model (A114-A)
  - 200V machine model (A115-A)
  - 1000V charged-device model (C101)
- Available in the Texas Instruments NanoFree™ package
- Supports 5V  $V_{CC}$  operation
- Input and open-drain output accept voltages up to 5.5V
- Maximum  $t_{pd}$  of 4.5ns at 3.3V at 125°C
- Low power consumption, 10 $\mu$ A maximum  $I_{CC}$
- $\pm 24$ mA output drive at 3.3V for open-drain devices
- $I_{off}$  supports partial-power-down mode and back-drive protection
- Latch-up performance exceeds 100mA per JESD 78, class II
- Can be used for up or down translation
- Schmitt trigger action on all ports

## 2 Applications

- AV receivers
- Blu-ray players and home theaters
- DVD recorders and players
- Desktop or notebook PCs
- Digital radio or internet radio players
- Digital video cameras (DVC)
- Embedded PCs
- GPS: personal navigation devices
- Mobile internet devices
- Network projector front-ends
- Portable media players
- Pro audio mixers
- Smoke detectors
- Solid state drive (SSD): enterprise
- High-definition (HDTV)
- Tablets: enterprise
- Audio docks: portable
- DLP front projection systems
- DVR and DVS
- Digital picture frame (DPF)
- Digital still cameras

## 3 Description

This single inverter buffer and driver is designed for 1.65V to 5.5V  $V_{CC}$  operation.

NanoFree package technology is a major breakthrough in IC packaging concepts, using the die as the package.

The output of the SN74LVC1G06 device is open-drain and can be connected to other open-drain outputs to implement active-low wired-OR or active-high wired-AND functions. The maximum sink current is 32mA.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs when the device is powered down. This inhibits current backflow into the device which prevents damage to the device.

### Package Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> | BODY SIZE (NOM) <sup>(3)</sup> |
|-------------|------------------------|-----------------------------|--------------------------------|
| SN74LVC1G06 | DBV (SOT-23, 5)        | 2.90mm × 2.80mm             | 2.90mm × 1.60mm                |
|             | DCK (SC70, 5)          | 2.00mm × 2.10mm             | 2.00mm × 1.25mm                |
|             | DRL (SOT-5X3, 5)       | 1.60mm × 1.60mm             | 1.60mm × 1.20mm                |
|             | DRY (USON, 6)          | 1.45mm × 1.00mm             | 1.45mm × 1.00mm                |
|             | DSF (X2SON, 6)         | 1.00mm × 1.00mm             | 1.00mm × 1.00mm                |
|             | YZP (DSBGA, 5)         | 1.75mm × 1.25mm             | 1.40mm × 0.90mm                |
|             | YZV (DSBGA, 4)         | 1.25mm × 1.25mm             | 0.90mm × 0.90mm                |
|             | DPW (X2SON, 5)         | 0.80mm × 0.80mm             | 0.80mm × 0.80mm                |

(1) For more information, see [Mechanical, Packaging, and Orderable Information](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.

(3) The body size (length × width) is a nominal value and does not include pins.



Logic Diagram (Positive Logic)



An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

## Table of Contents

|  |          |  |           |
|--|----------|--|-----------|
| <b>1 Features</b> .....  | <b>1</b> | 6.3 Feature Description.....   | <b>9</b>  |
| <b>2 Applications</b> .....  | <b>1</b> | 6.4 Device Functional Modes.....   | <b>10</b> |
| <b>3 Description</b> .....   | <b>1</b> | <b>7 Application and Implementation</b> .....                              | <b>11</b> |
| <b>4 Pin Configuration and Functions</b> .....                                       | <b>3</b> | 7.1 Application Information.....   | <b>11</b> |
| <b>5 Specifications</b> .....  | <b>4</b> | 7.2 Typical Application.....   | <b>11</b> |
| 5.1 Absolute Maximum Ratings.....  | 4        | 7.3 Power Supply Recommendations.....                                      | <b>12</b> |
| 5.2 ESD Ratings.....   | 4        | 7.4 Layout.....  | <b>12</b> |
| 5.3 Recommended Operating Conditions.....  | 5        | <b>8 Device and Documentation Support</b> .....                            | <b>14</b> |
| 5.4 Thermal Information.....   | 5        | 8.1 Receiving Notification of Documentation Updates.....                   | <b>14</b> |
| 5.5 Electrical Characteristics.....  | 6        | 8.2 Support Resources.....   | <b>14</b> |
| 5.6 Switching Characteristics: $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ .....  | 6        | 8.3 Trademarks.....  | <b>14</b> |
| 5.7 Switching Characteristics: $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ ..... | 6        | 8.4 Electrostatic Discharge Caution.....                                   | <b>14</b> |
| 5.8 Operating Characteristics.....   | 6        | 8.5 Glossary.....  | <b>14</b> |
| 5.9 Typical Characteristics.....   | 7        | <b>9 Revision History</b> .....  | <b>14</b> |
| <b>6 Detailed Description</b> .....  | <b>9</b> | <b>10 Mechanical, Packaging, and Orderable</b><br><b>Information</b> ..... | <b>15</b> |
| 6.1 Overview.....  | 9        |  |           |
| 6.2 Functional Block Diagram.....  | 9        |  |           |

## 4 Pin Configuration and Functions

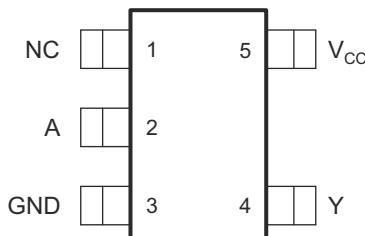


Figure 4-1. DBV Package 5-Pin SOT-23 Top View

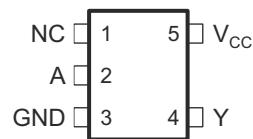


Figure 4-2. DRL Package 5-Pin SOT-5X3 Top View




Figure 4-3. DCK Package 5-Pin SC70 Top View




Figure 4-4. DPW Package 5-Pin X2SON Top View




Figure 4-5. DRY Package 6-Pin SON Top View




Figure 4-6. DSF Package 6-Pin SON Top View




Figure 4-7. YZP Package 5-Pin DSBGA Top View




Figure 4-8. YZV Package 4-Pin DSBGA Top View

Table 4-1. Pin Functions (2)

| NAME              | PIN                   |             |     | I/O | DESCRIPTION |               |
|-------------------|-----------------------|-------------|-----|-----|-------------|---------------|
|                   | DBV, DCK,<br>DRL, DPW | DRY,<br>DSF | YZP |     |             |               |
| A                 | 2                     | 2           | B1  | A1  | I           | Input         |
| DNU               | —                     | —           | A1  | —   | —           | Do not use    |
| GND               | 3                     | 3           | C1  | B1  | —           | Ground        |
| NC <sup>(1)</sup> | 1                     | 1           | —   | —   | —           | Not connected |
| V <sub>CC</sub>   | 5                     | 6           | A2  | A2  | —           | Power pin     |
|                   |                       | 4           | C2  | B2  | O           | Output        |

(1) NC – No internal connection

(2) See mechanical drawings for dimensions.

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|           |   | MIN       | MAX       | UNIT |
|-----------|---|-----------|-----------|------|
| $V_{CC}$  | Supply voltage  | -0.5      | 6.5       | V    |
| $V_I$     | Input voltage <sup>(2)</sup>  | -0.5      | 6.5       | V    |
| $V_O$     | Voltage applied to any output in the high-impedance or power-off state <sup>(2)</sup> | -0.5      | 6.5       | V    |
| $V_O$     | Voltage applied to any output in the high or low state <sup>(2) (3)</sup>             | -0.5      | 6.5       | V    |
| $I_{IK}$  | Input clamp current   | $V_I < 0$ | -50       | mA   |
| $I_{OK}$  | Output clamp current  | $V_O < 0$ | -50       | mA   |
| $I_O$     | Continuous output current   |           | $\pm 50$  | mA   |
|           | Continuous current through $V_{CC}$ or GND  |           | $\pm 100$ | mA   |
| $T_j$     | Junction temperature  | -65       | 150       | °C   |
| $T_{stg}$ | Storage temperature   | -65       | 150       | °C   |

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of  $V_{CC}$  is provided in the *Recommended Operating Conditions* table.

### 5.2 ESD Ratings

|             |  | VALUE | UNIT |
|-------------|--|-------|------|
| $V_{(ESD)}$ | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | 2000  | V    |
|             | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | 1000  |      |
|             | Machine Model (MM), per A115-A   | 200   |      |

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

## 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                 |                                    |   | MIN                    | MAX                    | UNIT |
|-----------------|------------------------------------|---|------------------------|------------------------|------|
| V <sub>CC</sub> | Supply voltage                     | Operating                                   | 1.65                   | 5.5                    | V    |
|                 |                                    | Data retention only                         | 1.5                    |                        |      |
| V <sub>IH</sub> | High-level input voltage           | V <sub>CC</sub> = 1.65V to 1.95V            | 0.65 × V <sub>CC</sub> |                        | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              | 1.7                    |                        |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                | 2                      |                        |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              | 0.7 × V <sub>CC</sub>  |                        |      |
| V <sub>IL</sub> | Low-level input voltage            | V <sub>CC</sub> = 1.65V to 1.95V            |                        | 0.35 × V <sub>CC</sub> | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              |                        | 0.7                    |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                |                        | 0.8                    |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              |                        | 0.3 × V <sub>CC</sub>  |      |
| V <sub>I</sub>  | Input voltage                      |   | 0                      | 5.5                    | V    |
| V <sub>O</sub>  | Output voltage                     |   | 0                      | 5.5                    | V    |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65V                     |                        | 4                      | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      |                        | 8                      |      |
|                 |                                    | V <sub>CC</sub> = 3V                        |                        | 16                     |      |
|                 |                                    |   |                        | 24                     |      |
| Δt/Δv           | Input transition rise or fall rate | V <sub>CC</sub> = 4.5V                      |                        | 32                     |      |
|                 |                                    | V <sub>CC</sub> = 1.8V ± 0.15V, 2.5V ± 0.2V |                        | 20                     | ns/V |
|                 |                                    | V <sub>CC</sub> = 3.3V ± 0.3V               |                        | 10                     |      |
| T <sub>A</sub>  | Operating free-air temperature     | V <sub>CC</sub> = 5V ± 0.5V                 |                        | 5                      |      |
|                 |                                    |   | -40                    | 125                    | °C   |

(1) All unused inputs of the device must be held at V<sub>CC</sub> or GND to establish proper device operation. See [Implications of Slow or Floating CMOS Inputs](#) application report.

## 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> | SN74LVC1G06                                  |               |                  |              |                |                |                | UNIT  |      |
|-------------------------------|--|---------------|------------------|--------------|----------------|----------------|----------------|-------|------|
|                               | DBV<br>(SOT-23)                              | DCK<br>(SC70) | DRL<br>(SOT-5X3) | DRY<br>(SON) | DPW<br>(X2SON) | YZV<br>(DSBGA) | YZP<br>(DSBGA) |       |      |
|                               | 5 PINS                                       | 5 PINS        | 5 PINS           | 5 PINS       | 5 PINS         | 4 PINS         | 5 PINS         |       |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 357.1         | 371.0            | 296.2        | 369.6          | 511            | 168.2          | 144.4 | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 263.7         | 297.5            | 137.3        | 257.6          | 241.9          | 2.1            | 1.3   | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 264.4         | 258.6            | 145.3        | 230.8          | 374.2          | 55.9           | 39.9  | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 195.6         | 195.6            | 14.7         | 77.2           | 45             | 1.1            | 0.5   | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 262.2         | 256.2            | 145.9        | 231            | 373.3          | 56.3           | 39.7  | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | N/A           | N/A              | N/A          | N/A            | 168            | N/A            | N/A   | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

## 5.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER                                    | TEST CONDITIONS   | V <sub>CC</sub> | MIN           | TYP <sup>(1)</sup> | MAX | UNIT |
|--|---|-----------------|---------------|--------------------|-----|------|
| V <sub>OL</sub><br>High-level output voltage | I <sub>OL</sub> = 100µA   | 1.65V to 5.5V   |               | 0.1                |     | V    |
|  | I <sub>OL</sub> = 4mA   | 1.65V           |               | 0.45               |     |      |
|  | I <sub>OL</sub> = 8mA   | 2.3V            |               | 0.3                |     |      |
|  | I <sub>OL</sub> = 16mA  |                 |               | 0.4                |     |      |
|  | I <sub>OL</sub> = 24mA  | 3V              |               | 0.55               |     |      |
|  | I <sub>OL</sub> = 32mA  | 4.5V            |               | 0.55               |     |      |
| I <sub>I</sub><br>Inflection-point current   | V <sub>I</sub> = 5.5V or GND  | A input         | 0 to 5.5V     |                    | ±1  | µA   |
| I <sub>off</sub><br>Off-state current        | V <sub>I</sub> or V <sub>O</sub> = 5.5V                                     |                 | 0             |                    | ±10 | µA   |
| I <sub>CC</sub>                              | V <sub>I</sub> = 5.5V or GND, I <sub>O</sub> = 0                            |                 | 1.65V to 5.5V |                    | 10  | µA   |
| ΔI <sub>CC</sub>                             | One input at V <sub>CC</sub> – 0.6V, other inputs at V <sub>CC</sub> or GND |                 | 3V to 5.5V    |                    | 500 | µA   |
| C <sub>I</sub><br>Input capacitance          | V <sub>I</sub> = V <sub>CC</sub> or GND                                     |                 | 3.3V          |                    | 4   | pF   |
| C <sub>O</sub><br>Off-state capacitance      | V <sub>O</sub> = V <sub>CC</sub> or GND                                     |                 | 3.3V          |                    | 5   | pF   |

(1) All typical values are at V<sub>CC</sub> = 3.3V, T<sub>A</sub> = 25°C.

## 5.6 Switching Characteristics: –40°C to +85°C

over recommended operating free-air temperature range, T<sub>A</sub> = –40°C to +85°C (unless otherwise noted) (see [Figure 6-1](#))

| PARAMETER                            | FROM (INPUT) | TO (OUTPUT) | V <sub>CC</sub> | MIN | MAX | UNIT |
|--------------------------------------|--------------|-------------|-----------------|-----|-----|------|
| t <sub>pd</sub><br>Propagation delay | A            | Y           | 1.8V ± 0.15V    | 2.2 | 6.5 | ns   |
|                                      |              |             | 2.5V ± 0.2V     | 1.1 | 4   |      |
|                                      |              |             | 3.3V ± 0.3V     | 1.2 | 4   |      |
|                                      |              |             | 5V ± 0.5V       | 1   | 3   |      |

## 5.7 Switching Characteristics: –40°C to +125°C

over recommended operating free-air temperature range, T<sub>A</sub> = –40°C to +125°C (unless otherwise noted) (see [Figure 6-1](#))

| PARAMETER                            | FROM (INPUT) | TO (OUTPUT) | V <sub>CC</sub> | MIN | MAX | UNIT |
|--------------------------------------|--------------|-------------|-----------------|-----|-----|------|
| t <sub>pd</sub><br>Propagation delay | A            | Y           | 1.8V ± 0.15V    | 2.2 | 7   | ns   |
|                                      |              |             | 2.5V ± 0.2V     | 1.1 | 4.5 |      |
|                                      |              |             | 3.3V ± 0.3V     | 1.2 | 4.5 |      |
|                                      |              |             | 5V ± 0.5V       | 1   | 3.5 |      |

## 5.8 Operating Characteristics

T<sub>A</sub> = 25°C

| PARAMETER  | TEST CONDITIONS | V <sub>CC</sub> | TYP | UNIT |
|--|-----------------|-----------------|-----|------|
| C <sub>pd</sub><br>Power dissipation capacitance | f = 10MHz       | 1.8V            | 3   | pF   |
|  |                 | 2.5V            | 3   |      |
|  |                 | 3.3V            | 4   |      |
|  |                 | 5V              | 6   |      |

## 5.9 Typical Characteristics

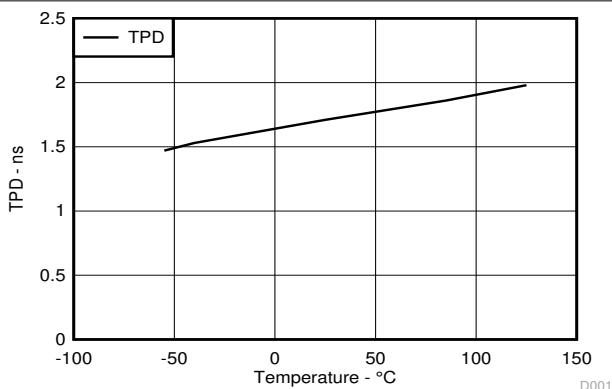


Figure 5-1. TPD Across Temperature at 3.3V  $V_{CC}$


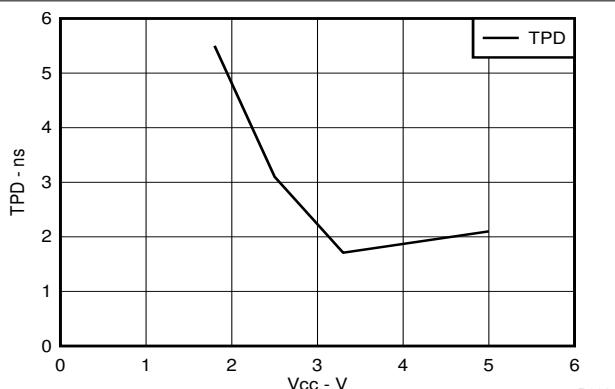


Figure 5-2. TPD Across  $V_{CC}$  at 25°C





## Parameter Measurement Information

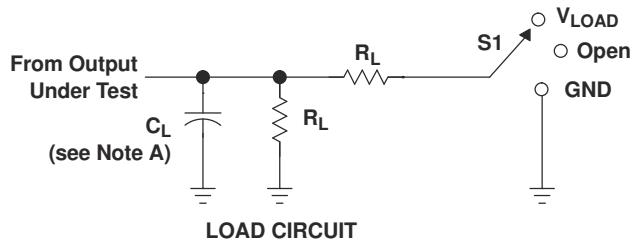

| TEST                          | S1         |
|-------------------------------|------------|
| $t_{PZL}$ (see Notes E and F) | $V_{LOAD}$ |
| $t_{PLZ}$ (see Notes E and G) | $V_{LOAD}$ |
| $t_{PHZ}/t_{PZH}$             | $V_{LOAD}$ |

LOAD CIRCUIT

| $V_{CC}$                           | INPUT    |                       | $V_M$      | $V_{LOAD}$        | $C_L$ | $R_L$        | $V_\Delta$ |
|------------------------------------|----------|-----------------------|------------|-------------------|-------|--------------|------------|
|                                    | $V_I$    | $t_r/t_f$             |            |                   |       |              |            |
| $1.8 \text{ V} \pm 0.15 \text{ V}$ | $V_{CC}$ | $\leq 2 \text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 1 k $\Omega$ | 0.15 V     |
| $2.5 \text{ V} \pm 0.2 \text{ V}$  | $V_{CC}$ | $\leq 2 \text{ ns}$   | $V_{CC}/2$ | $2 \times V_{CC}$ | 30 pF | 500 $\Omega$ | 0.15 V     |
| $3.3 \text{ V} \pm 0.3 \text{ V}$  | 3 V      | $\leq 2.5 \text{ ns}$ | 1.5 V      | 6 V               | 50 pF | 500 $\Omega$ | 0.3 V      |
| $5 \text{ V} \pm 0.5 \text{ V}$    | $V_{CC}$ | $\leq 2.5 \text{ ns}$ | $V_{CC}/2$ | $2 \times V_{CC}$ | 50 pF | 500 $\Omega$ | 0.3 V      |

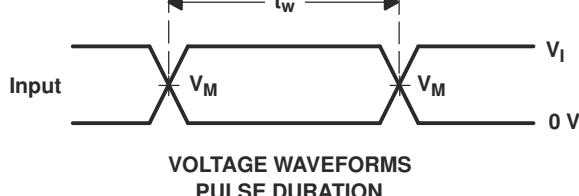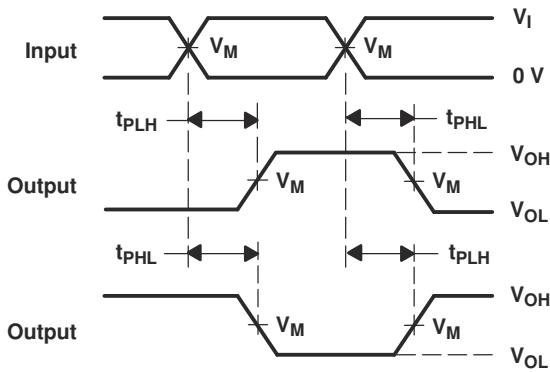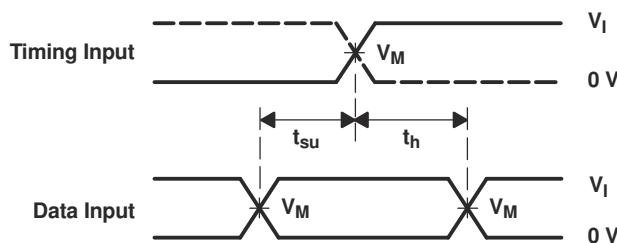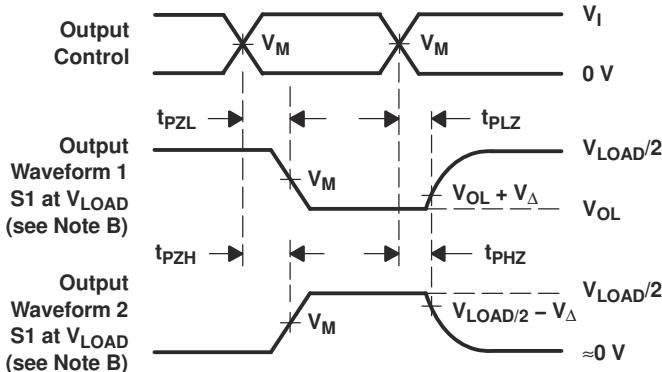VOLTAGE WAVEFORMS  
PULSE DURATIONVOLTAGE WAVEFORMS  
PROPAGATION DELAY TIMES  
INVERTING AND NONINVERTING OUTPUTSVOLTAGE WAVEFORMS  
SETUP AND HOLD TIMESVOLTAGE WAVEFORMS  
ENABLE AND DISABLE TIMES  
LOW- AND HIGH-LEVEL ENABLING

NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.  
 C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq 10 \text{ MHz}$ ,  $Z_O = 50 \Omega$ .  
 D. The outputs are measured one at a time, with one transition per measurement.  
 E. Since this device has open-drain outputs,  $t_{PLZ}$  and  $t_{PZH}$  are the same as  $t_{pd}$ .  
 F.  $t_{PZL}$  is measured at  $V_M$ .  
 G.  $t_{PLZ}$  is measured at  $V_{OL} + V_\Delta$ .  
 H. All parameters and waveforms are not applicable to all devices.

Figure 6-1. Load Circuit and Voltage Waveforms (Open Drain)

## 6 Detailed Description

### 6.1 Overview

The SN74LVC1G06 device contains one open-drain inverter with a maximum sink current of 32mA. This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs when the device is powered down. This inhibits current backflow into the device which prevents damage to the device.

### 6.2 Functional Block Diagram




Figure 6-1. Logic Diagram (Positive Logic)

### 6.3 Feature Description

#### 6.3.1 CMOS Open-Drain Outputs

The open-drain output allows the device to sink current to GND but not to source current from  $V_{CC}$ . When the output is not actively pulling the line low, it will go into a high impedance state (tri-state). This allows the device to be used for a wide variety of applications, including up-translation and down-translation, as the output voltage can be determined by an external pullup.

Consider the drive capability of this device creates fast edges into light loads so routing and load conditions prevent ringing. Additionally, the outputs of this device are capable of driving larger currents than the device can sustain without being damaged. It is important for the power output of the device to be limited to avoid thermal runaway and damage due to over-current. The electrical and thermal limits defined in the *Absolute Maximum Ratings* must be followed at all times.

#### 6.3.2 Standard CMOS Inputs

The impedance for standard CMOS inputs is high. Typically, a CMOS input is modeled as a resistor in parallel with the input capacitance as shown in the *Electrical Characteristics*. The worst case resistance is calculated with the maximum input voltage, given in the *Absolute Maximum Ratings*, and the maximum input leakage current, given in the *Electrical Characteristics*, using ohm's law ( $R = V \div I$ ).


Signals applied to the inputs need to have fast edge rates, as defined by  $\Delta t/\Delta v$  in the *Recommended Operating Conditions* to avoid excessive current consumption and oscillations. If a slow or noisy input signal is required, a device with a Schmitt-trigger input should be used to condition the input signal before the standard CMOS input.

### 6.3.3 Negative Clamping Diodes

The inputs and outputs to this device have negative clamping diodes as depicted in Figure 6-2.

#### CAUTION

Voltages beyond the values specified in the *Absolute Maximum Ratings* table can cause damage to the device. The input negative-voltage and the output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

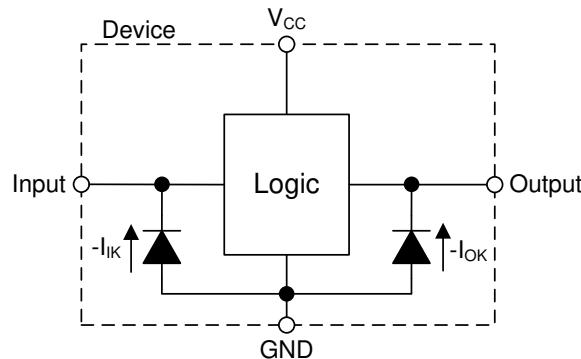

**Figure 6-2. Electrical Placement of Clamping Diodes for Each Input and Output**

### 6.3.4 Partial Power Down ( $I_{off}$ )

Each input and output enter a high impedance state when the supply voltage is 0V. The maximum leakage into or out of any input or output pin on the device is specified by  $I_{off}$  in the *Electrical Characteristics*.

### 6.3.5 Over-voltage Tolerant Inputs

Input signals to this device can be driven above the supply voltage as long as the input signals remain below the maximum input voltage value specified in the *Recommended Operating Conditions*.

## 6.4 Device Functional Modes

Table 6-1 lists the functional modes of the SN74LVC1G06.

**Table 6-1. Function Table**

| INPUT A | OUTPUT Y |
|---------|----------|
| L       | Hi-Z     |
| H       | L        |

## 7 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 7.1 Application Information

The SN74LVC1G06 is a high-drive CMOS device that can be used to implement a high output drive buffer, such as an LED application. It can sink 32mA of current at 4.5V making it appropriate for high-drive applications. It is good for high-speed applications up to 100MHz. The inputs are 5.5V tolerant allowing it to translate up or down to  $V_{CC}$ . Below shows a simple LED driver application for a single channel of the device.

### 7.2 Typical Application

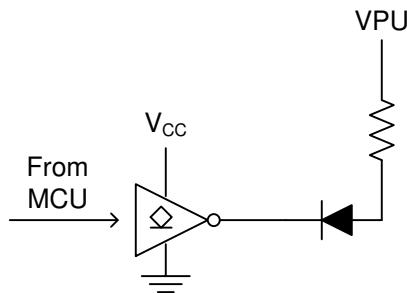


Figure 7-1. Typical Application Diagram


#### 7.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads so routing and load conditions should be considered to prevent ringing.

#### 7.2.2 Detailed Design Procedure

1. Recommended Input Conditions
  - Rise time and fall time specs. See ( $\Delta t/\Delta V$ ) in the [Recommended Operating Conditions](#) table.
  - Specified high and low levels. See ( $V_{IH}$  and  $V_{IL}$ ) in the [Recommended Operating Conditions](#) table.
  - Inputs are overvoltage tolerant allowing them to go as high as ( $V_I$  max) in the [Recommended Operating Conditions](#) table at any valid  $V_{CC}$ .
2. Recommended Output Conditions
  - Load currents should not exceed ( $I_O$  max) per output and should not exceed (Continuous current through  $V_{CC}$  or GND) total current for the part. These limits are located in the [Absolute Maximum Ratings](#) table.
  - Outputs should not be pulled above 5.5V.

### 7.2.3 Application Curve

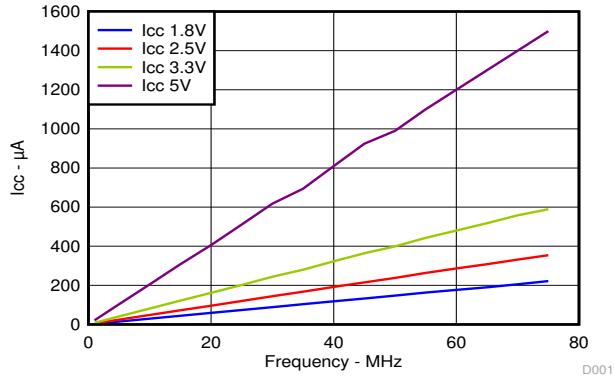

**Figure 7-2.  $I_{CC}$  vs Frequency**

### 7.3 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the [Recommended Operating Conditions](#) table.

The  $V_{CC}$  pin must have a good bypass capacitor to prevent power disturbance. A  $0.1\mu F$  capacitor is recommended, and it is acceptable to parallel multiple bypass caps to reject different frequencies of noise.  $0.1\mu F$  and  $1\mu F$  capacitors are commonly used in parallel. For the best results, install the bypass capacitor as close to the power pin as possible.


### 7.4 Layout

#### 7.4.1 Layout Guidelines


Even low data rate digital signals can contain high-frequency signal components due to fast edge rates. When a printed-circuit board (PCB) trace turns a corner at a  $90^\circ$  angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self-inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. [Figure 7-3](#) shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

An example layout is given in [Figure 7-4](#) for the DPW (X2SON-5) package. This example layout includes a 0402 (metric) capacitor and uses the measurements found in the example board layout appended to this end of this data sheet. A via of diameter 0.1mm (3.973mil) is placed directly in the center of the device. This via can be used to trace out the center pin connection through another board layer, or it can be left out of the layout.

#### 7.4.2 Layout Example

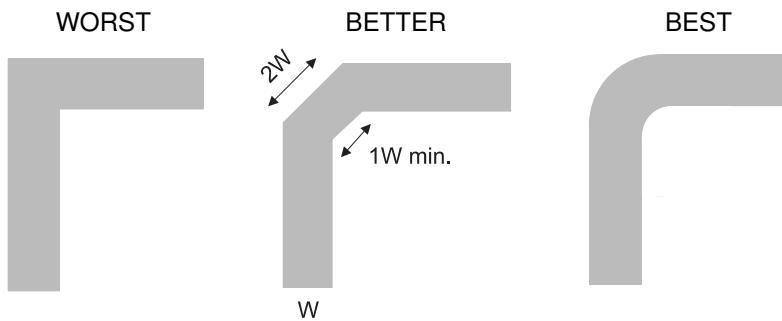

**Figure 7-3. Trace Example**

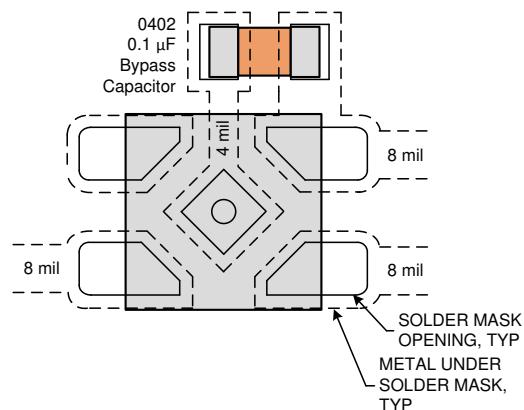

**Figure 7-4. Example Layout With DPW (X2SON-5) Package**

## 8 Device and Documentation Support

### 8.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 8.2 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 8.3 Trademarks

NanoFree™ and TI E2E™ are trademarks of Texas Instruments.

All trademarks are the property of their respective owners.

### 8.4 Electrostatic Discharge Caution

 This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 8.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision AA (June 2025) to Revision AB (October 2025)  | Page |
|---|------|
| • Changed Junction-to-ambient thermal resistance value for DCK package from: 276.1°C/W to: 371.10°C/W ... | 5    |
| • Changed Junction-to-case (top) thermal resistance value for DCK package from: 178.9°C/W to: 297.5°C/W . | 5    |
| • Changed Junction-to-board thermal resistance value for DCK package from: 70.9°C/W to: 258.2°C/W .....   | 5    |
| • Changed Junction-to-top characterization value for DCK package from: 47°C/W to: 195.6°C/W .....         | 5    |
| • Changed Junction-to-board characterization value for DCK package from: 69.3°C/W to: 256.2°C/W .....     | 5    |

| Changes from Revision Z (November 2017) to Revision AA (June 2025)  | Page |
|---|------|
| • Updated the numbering format for tables, figures, and cross-references throughout the document.....     | 1    |
| • Changed <i>Device Information</i> table to <i>Package Information</i> .....                             | 1    |
| • Changed Junction-to-ambient thermal resistance value for DBV package from: 231.5°C/W to: 357.1°C/W .... | 5    |
| • Changed Junction-to-case (top) thermal resistance value for DBV package from: 139.4°C/W to: 263.7°C/W . | 5    |
| • Changed Junction-to-board thermal resistance value for DBV package from: 71.1°C/W to: 264.4°C/W .....   | 5    |
| • Changed Junction-to-top characterization value for DBV package from: 45.2°C/W to: 195.6°C/W .....       | 5    |
| • Changed Junction-to-board characterization value for DBV package from: 70.7°C/W to: 262.2°C/W .....     | 5    |

| Changes from Revision Y (February 2017) to Revision Z (November 2017)                                   | Page |
|---|------|
| • Changed values in the Thermal Information table to align with JEDEC standards .....                   | 5    |
| • Updated Feature Description to include more detailed information about specific device features. .... | 9    |

---

- Added DPW layout example ..... [12](#)

---

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser based versions of this data sheet, refer to the left hand navigation.

**PACKAGING INFORMATION**

| Orderable part number               | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                                     |
|-------------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---|
| <a href="#">SN74LVC1G06DBVR</a>     | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (C065, C06F, C06J,<br>C06R, C06T)<br>(C06H, C06P, C06S) |
| <a href="#">SN74LVC1G06DBVR.A</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (C065, C06F, C06J,<br>C06R, C06T)<br>(C06H, C06P, C06S) |
| <a href="#">SN74LVC1G06DBVR.B</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (C065, C06F, C06J,<br>C06R, C06T)<br>(C06H, C06P, C06S) |
| <a href="#">SN74LVC1G06DBVRE4</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C06F  |
| <a href="#">SN74LVC1G06DBVRG4</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C06F  |
| <a href="#">SN74LVC1G06DBVRG4.B</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C06F  |
| <a href="#">SN74LVC1G06DBVT</a>     | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (C065, C06F, C06J,<br>C06R)<br>(C06H, C06P, C06S)       |
| <a href="#">SN74LVC1G06DBVT.B</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (C065, C06F, C06J,<br>C06R)<br>(C06H, C06P, C06S)       |
| <a href="#">SN74LVC1G06DBVTG4</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C06F  |
| <a href="#">SN74LVC1G06DBVTG4.B</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | C06F  |
| <a href="#">SN74LVC1G06DCKR</a>     | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTJ, CT<br>K, CTR, CTT)<br>(CTH, CTS)        |
| <a href="#">SN74LVC1G06DCKR.A</a>   | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTJ, CT<br>K, CTR, CTT)<br>(CTH, CTS)        |
| <a href="#">SN74LVC1G06DCKR.B</a>   | Active        | Production           | SC70 (DCK)   5   | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTJ, CT<br>K, CTR, CTT)<br>(CTH, CTS)        |

| Orderable part number               | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)                         |
|-------------------------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---|
| <a href="#">SN74LVC1G06DCKRE4</a>   | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DCKRE4.B</a> | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DCKRG4</a>   | Active        | Production           | SC70 (DCK)   5    | 3000   null           | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT5   |
| <a href="#">SN74LVC1G06DCKRG4.B</a> | Active        | Production           | SC70 (DCK)   5    | 3000   null           | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT5   |
| <a href="#">SN74LVC1G06DCKT</a>     | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTJ, CT<br>K, CTR)<br>(CTH, CTS) |
| <a href="#">SN74LVC1G06DCKT.B</a>   | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTJ, CT<br>K, CTR)<br>(CTH, CTS) |
| <a href="#">SN74LVC1G06DCKTE4</a>   | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DCKTE4.B</a> | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DCKTG4</a>   | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DCKTG4.B</a> | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (CT5, CTF, CTK, CT<br>R)<br>(CTH, CTS)      |
| <a href="#">SN74LVC1G06DPWR</a>     | Active        | Production           | X2SON (DPW)   5   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | CO  |
| <a href="#">SN74LVC1G06DPWR.B</a>   | Active        | Production           | X2SON (DPW)   5   | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | CO  |
| <a href="#">SN74LVC1G06DRLR</a>     | Active        | Production           | SOT-5X3 (DRL)   5 | 4000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | (CT7, CTR)                                  |
| <a href="#">SN74LVC1G06DRLR.B</a>   | Active        | Production           | SOT-5X3 (DRL)   5 | 4000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | (CT7, CTR)                                  |
| <a href="#">SN74LVC1G06DRYR</a>     | Active        | Production           | SON (DRY)   6     | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | CT  |
| <a href="#">SN74LVC1G06DRYR.B</a>   | Active        | Production           | SON (DRY)   6     | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | CT  |
| <a href="#">SN74LVC1G06DRYRG4</a>   | Active        | Production           | SON (DRY)   6     | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT  |
| <a href="#">SN74LVC1G06DRYRG4.B</a> | Active        | Production           | SON (DRY)   6     | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT  |
| <a href="#">SN74LVC1G06DSFR</a>     | Active        | Production           | SON (DSF)   6     | 5000   LARGE T&R      | Yes         | NIPDAU   NIPDAUAG                    | Level-1-260C-UNLIM                | -40 to 125   | CT  |

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| SN74LVC1G06DSFR.B               | Active        | Production           | SON (DSF)   6   | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | CT                  |
| SN74LVC1G06DSFRG4               | Active        | Production           | SON (DSF)   6   | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT                  |
| SN74LVC1G06DSFRG4.B             | Active        | Production           | SON (DSF)   6   | 5000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | CT                  |
| <a href="#">SN74LVC1G06YZPR</a> | Active        | Production           | DSBGA (YZP)   5 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | CTN                 |
| SN74LVC1G06YZPR.B               | Active        | Production           | DSBGA (YZP)   5 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | CTN                 |
| <a href="#">SN74LVC1G06YZVR</a> | Active        | Production           | DSBGA (YZV)   4 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | CT<br>N             |
| SN74LVC1G06YZVR.B               | Active        | Production           | DSBGA (YZV)   4 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | CT<br>N             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN74LVC1G06 :**


- Automotive : [SN74LVC1G06-Q1](#)
- Enhanced Product : [SN74LVC1G06-EP](#)

## NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

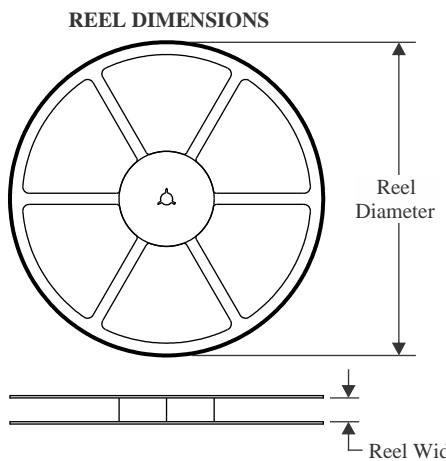**TAPE AND REEL INFORMATION**


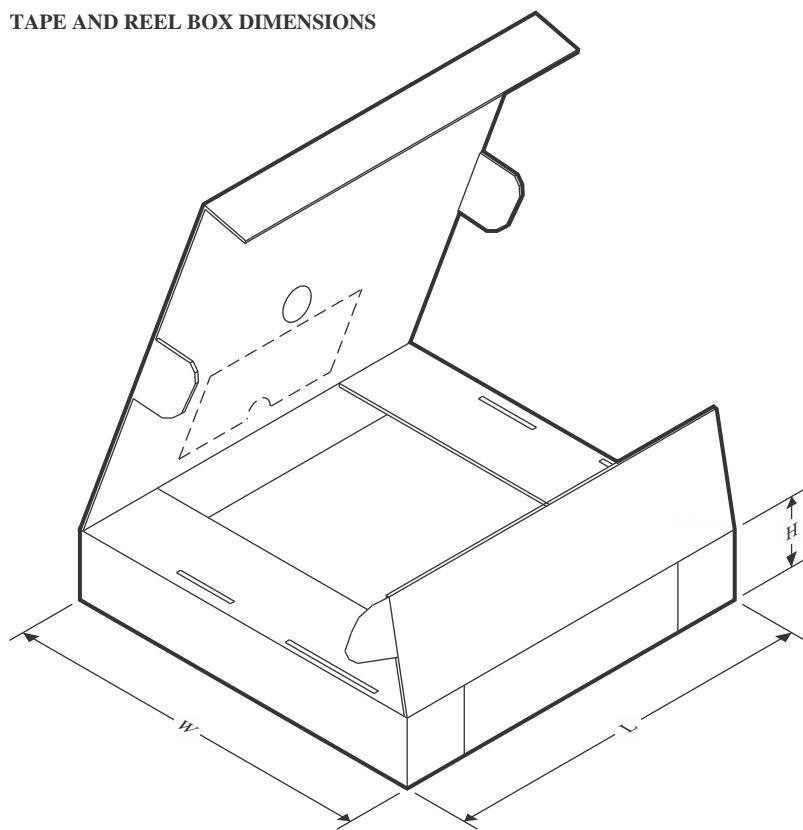
|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

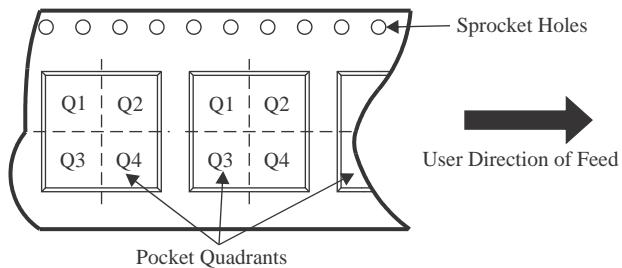**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LVC1G06DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DBVTG4 | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKR   | SC70         | DCK             | 5    | 3000 | 178.0              | 8.4                | 2.25    | 2.45    | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKRE4 | SC70         | DCK             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 178.0              | 9.2                | 2.4     | 2.4     | 1.22    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 180.0              | 8.4                | 2.47    | 2.3     | 1.25    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 178.0              | 9.2                | 2.4     | 2.4     | 1.22    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 180.0              | 8.4                | 2.47    | 2.3     | 1.25    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 180.0              | 8.4                | 2.47    | 2.3     | 1.25    | 4.0     | 8.0    | Q3            |

| Device            | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 178.0              | 9.2                | 2.4     | 2.4     | 1.22    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DPWR   | X2SON        | DPW             | 5    | 3000 | 178.0              | 8.4                | 0.91    | 0.91    | 0.5     | 2.0     | 8.0    | Q3            |
| SN74LVC1G06DRLR   | SOT-5X3      | DRL             | 5    | 4000 | 180.0              | 8.4                | 1.98    | 1.78    | 0.69    | 4.0     | 8.0    | Q3            |
| SN74LVC1G06DRYR   | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.15    | 1.6     | 0.75    | 4.0     | 8.0    | Q1            |
| SN74LVC1G06DRYRG4 | SON          | DRY             | 6    | 5000 | 180.0              | 9.5                | 1.15    | 1.6     | 0.75    | 4.0     | 8.0    | Q1            |
| SN74LVC1G06DSFR   | SON          | DSF             | 6    | 5000 | 180.0              | 9.5                | 1.16    | 1.16    | 0.5     | 4.0     | 8.0    | Q2            |
| SN74LVC1G06DSFRG4 | SON          | DSF             | 6    | 5000 | 180.0              | 9.5                | 1.16    | 1.16    | 0.5     | 4.0     | 8.0    | Q2            |
| SN74LVC1G06YZPR   | DSBGA        | YZP             | 5    | 3000 | 178.0              | 9.2                | 1.02    | 1.52    | 0.63    | 4.0     | 8.0    | Q1            |
| SN74LVC1G06YZVR   | DSBGA        | YZV             | 4    | 3000 | 178.0              | 9.2                | 1.0     | 1.0     | 0.63    | 4.0     | 8.0    | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LVC1G06DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| SN74LVC1G06DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| SN74LVC1G06DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| SN74LVC1G06DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| SN74LVC1G06DBVTG4 | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKR   | SC70         | DCK             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| SN74LVC1G06DCKRE4 | SC70         | DCK             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKT   | SC70         | DCK             | 5    | 250  | 202.0       | 201.0      | 28.0        |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKTE4 | SC70         | DCK             | 5    | 250  | 202.0       | 201.0      | 28.0        |
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 202.0       | 201.0      | 28.0        |
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| SN74LVC1G06DCKTG4 | SC70         | DCK             | 5    | 250  | 180.0       | 180.0      | 18.0        |

| Device            | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LVC1G06DPWR   | X2SON        | DPW             | 5    | 3000 | 205.0       | 200.0      | 33.0        |
| SN74LVC1G06DRLR   | SOT-5X3      | DRL             | 5    | 4000 | 202.0       | 201.0      | 28.0        |
| SN74LVC1G06DRYR   | SON          | DRY             | 6    | 5000 | 184.0       | 184.0      | 19.0        |
| SN74LVC1G06DRYRG4 | SON          | DRY             | 6    | 5000 | 184.0       | 184.0      | 19.0        |
| SN74LVC1G06DSFR   | SON          | DSF             | 6    | 5000 | 184.0       | 184.0      | 19.0        |
| SN74LVC1G06DSFRG4 | SON          | DSF             | 6    | 5000 | 184.0       | 184.0      | 19.0        |
| SN74LVC1G06YZPR   | DSBGA        | YZP             | 5    | 3000 | 220.0       | 220.0      | 35.0        |
| SN74LVC1G06YZVR   | DSBGA        | YZV             | 4    | 3000 | 220.0       | 220.0      | 35.0        |

# GENERIC PACKAGE VIEW

DPW 5

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4211218-3/D


## PACKAGE OUTLINE

**DPW0005A**



## **X2SON - 0.4 mm max height**

## PLASTIC SMALL OUTLINE - NO LEAD

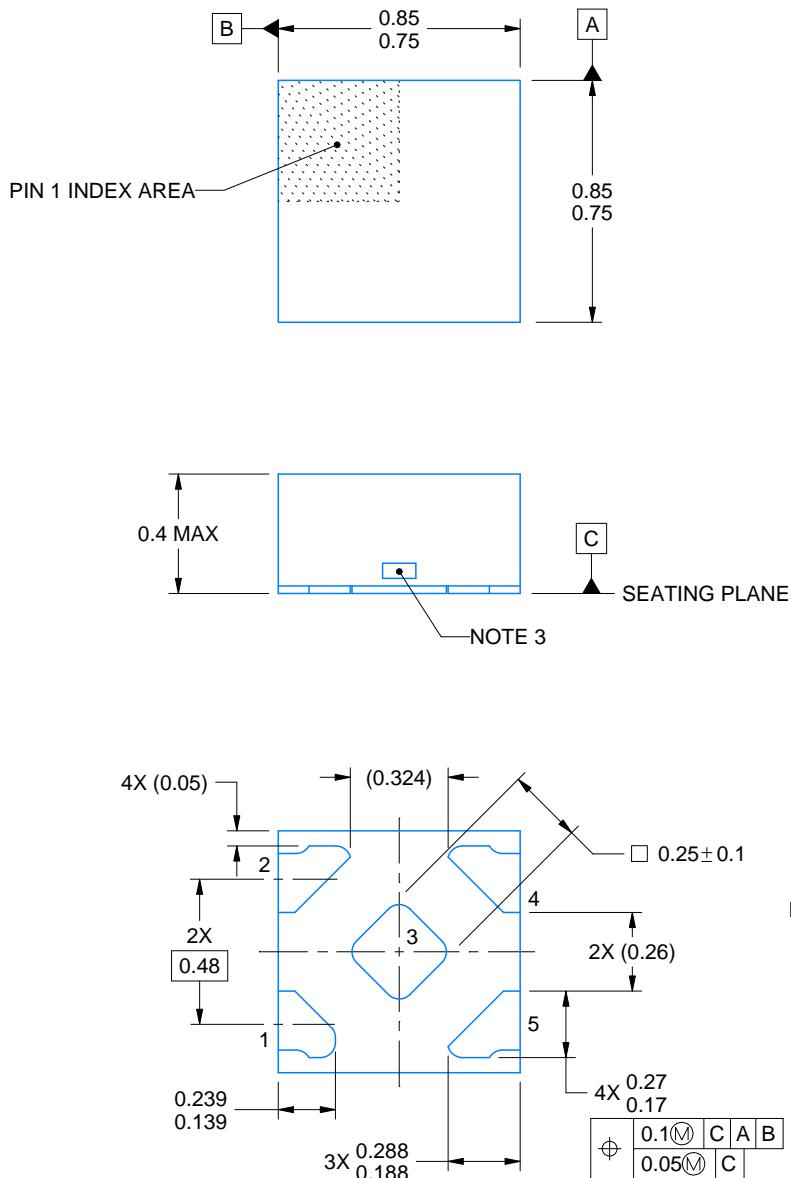

4223102/D 03/2022

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The size and shape of this feature may vary.

# EXAMPLE BOARD LAYOUT

DPW0005A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

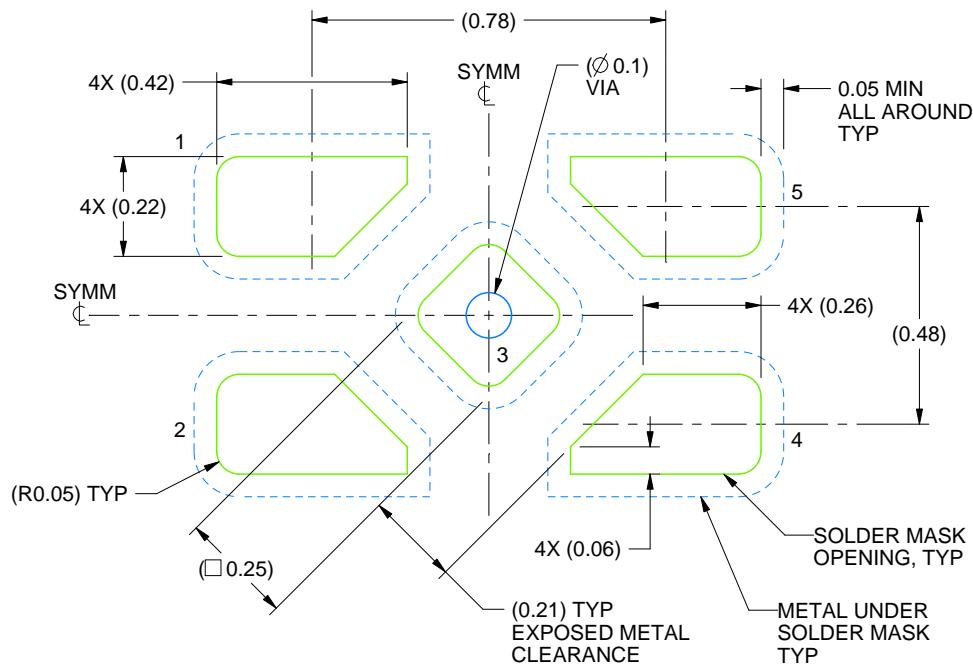

LAND PATTERN EXAMPLE  
SOLDER MASK DEFINED  
SCALE:60X

4223102/D 03/2022

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, refer to QFN/SON PCB application note in literature No. SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).

# EXAMPLE STENCIL DESIGN

DPW0005A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

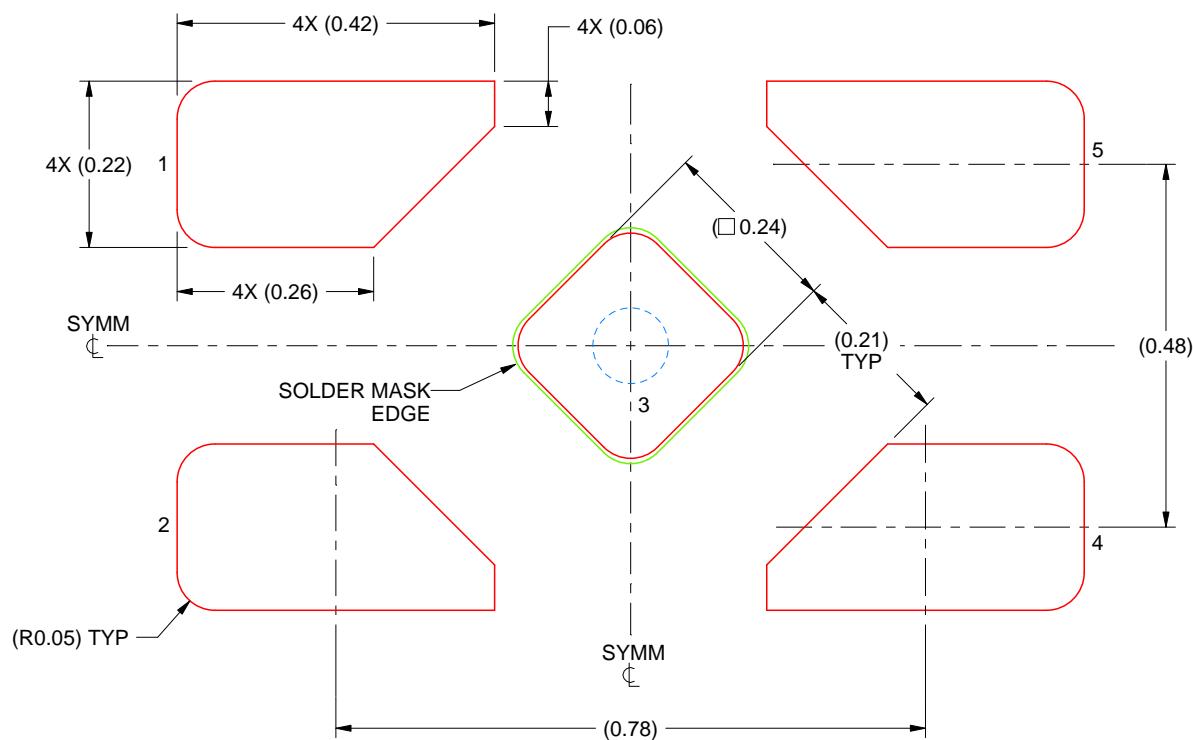

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL

EXPOSED PAD 3  
92% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:100X


4223102/D 03/2022

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


# PACKAGE OUTLINE

YZP0005



DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

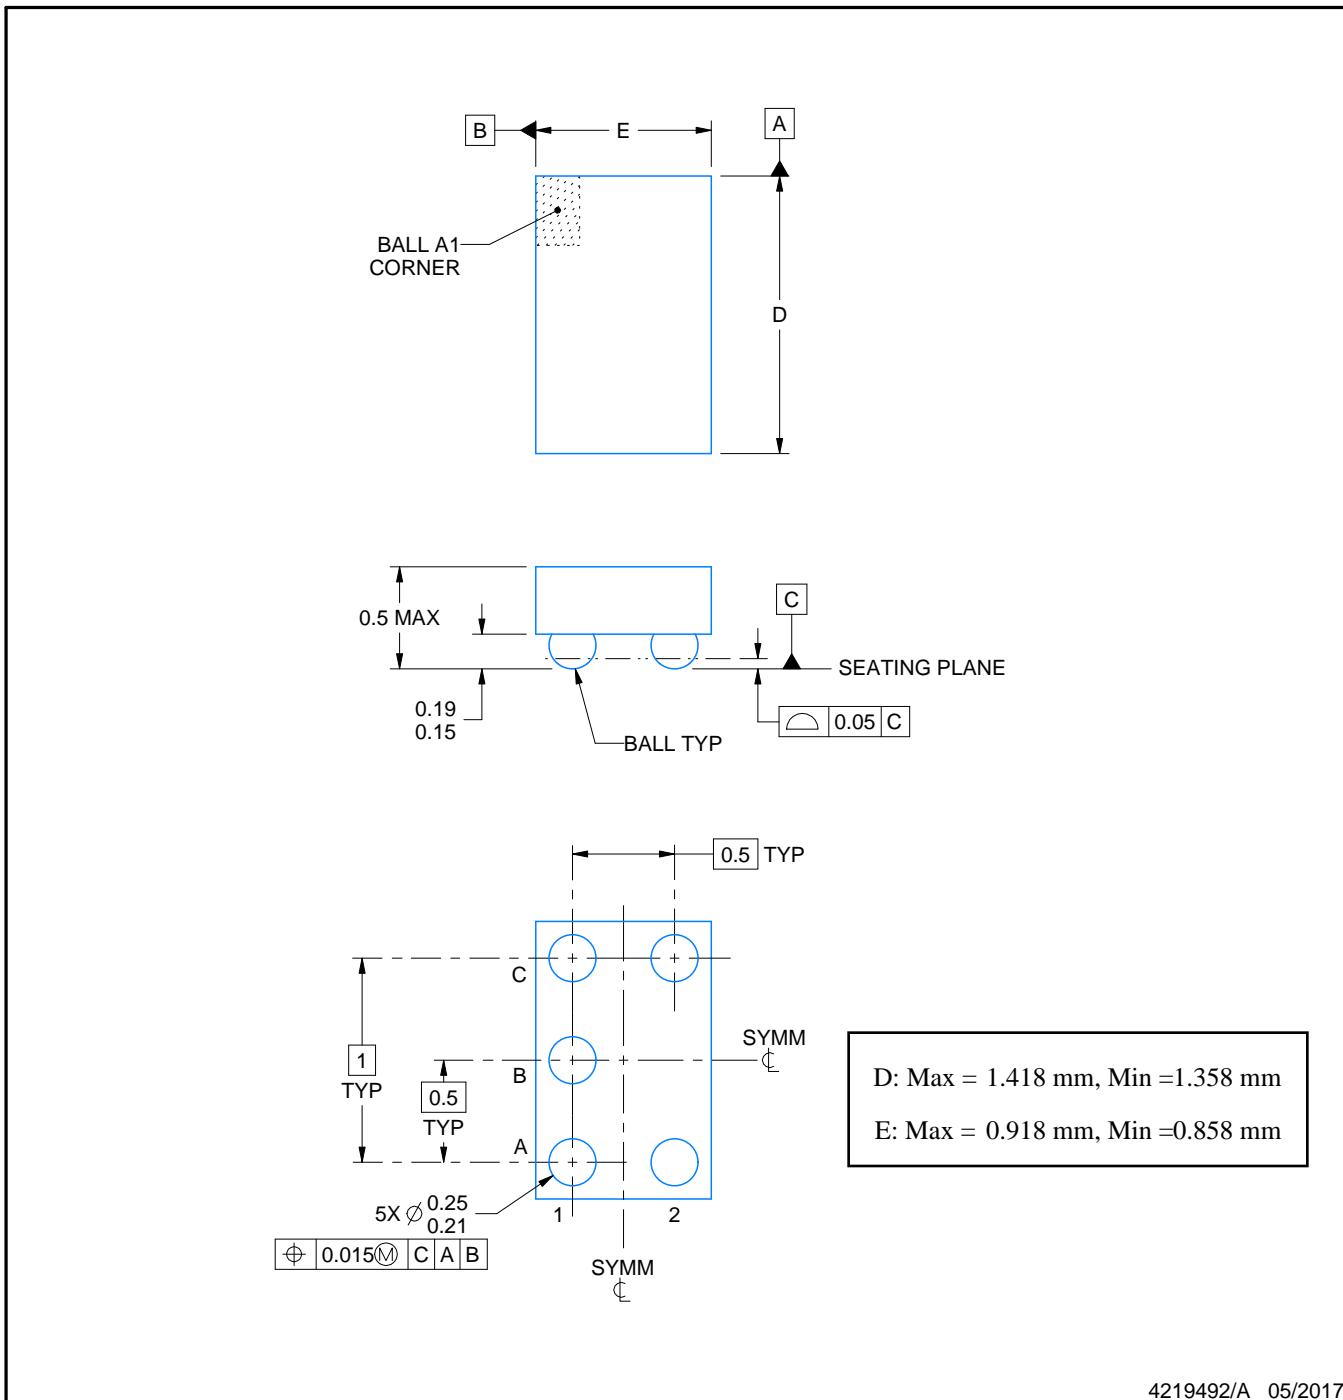

4219492/A 05/2017

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


YZP0005

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

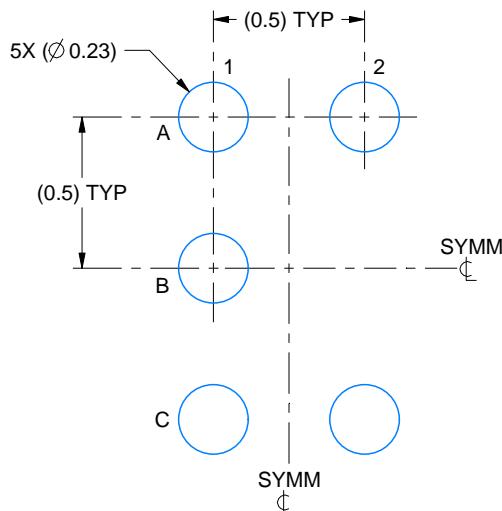

LAND PATTERN EXAMPLE  
SCALE:40X

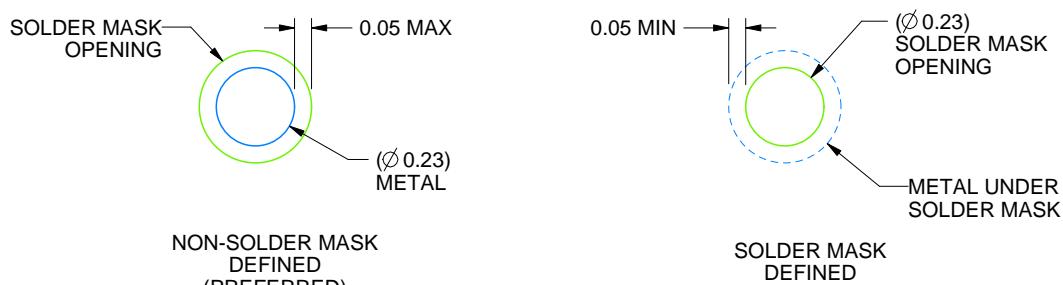

SOLDER MASK DETAILS  
NOT TO SCALE

4219492/A 05/2017

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

# EXAMPLE STENCIL DESIGN

YZP0005

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

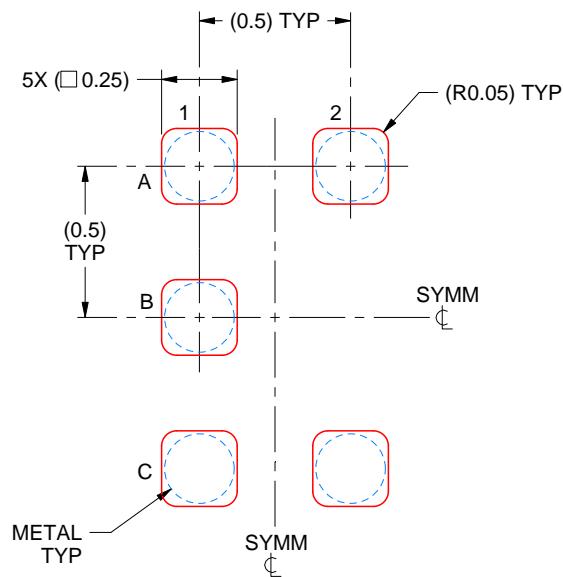

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:40X

4219492/A 05/2017




NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## MECHANICAL DATA

YZV (S-XBGA-N4)

DIE-SIZE BALL GRID ARRAY

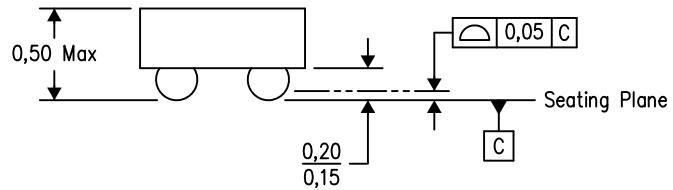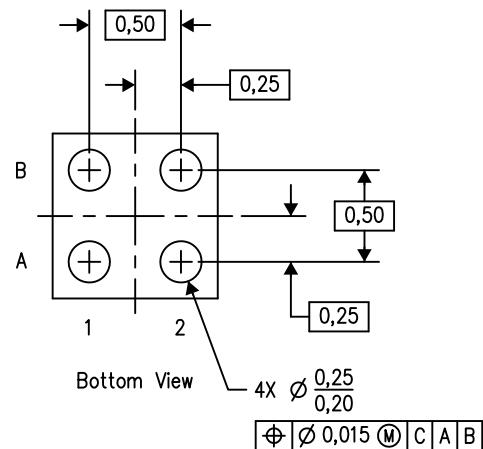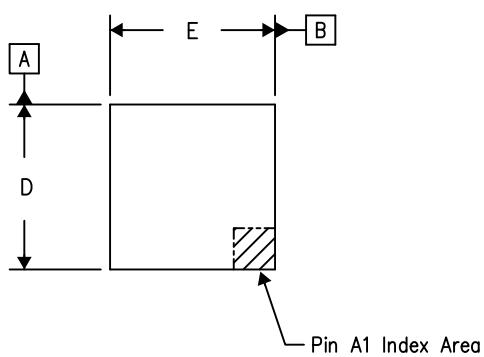

D: Max = 0.918 mm, Min = 0.858 mm  
E: Max = 0.918 mm, Min = 0.858 mm

4206083/C 07/13

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.  
B. This drawing is subject to change without notice.  
C. NanoFree™ package configuration.

NanoFree is a trademark of Texas Instruments.


# PACKAGE OUTLINE

DCK0005A



SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

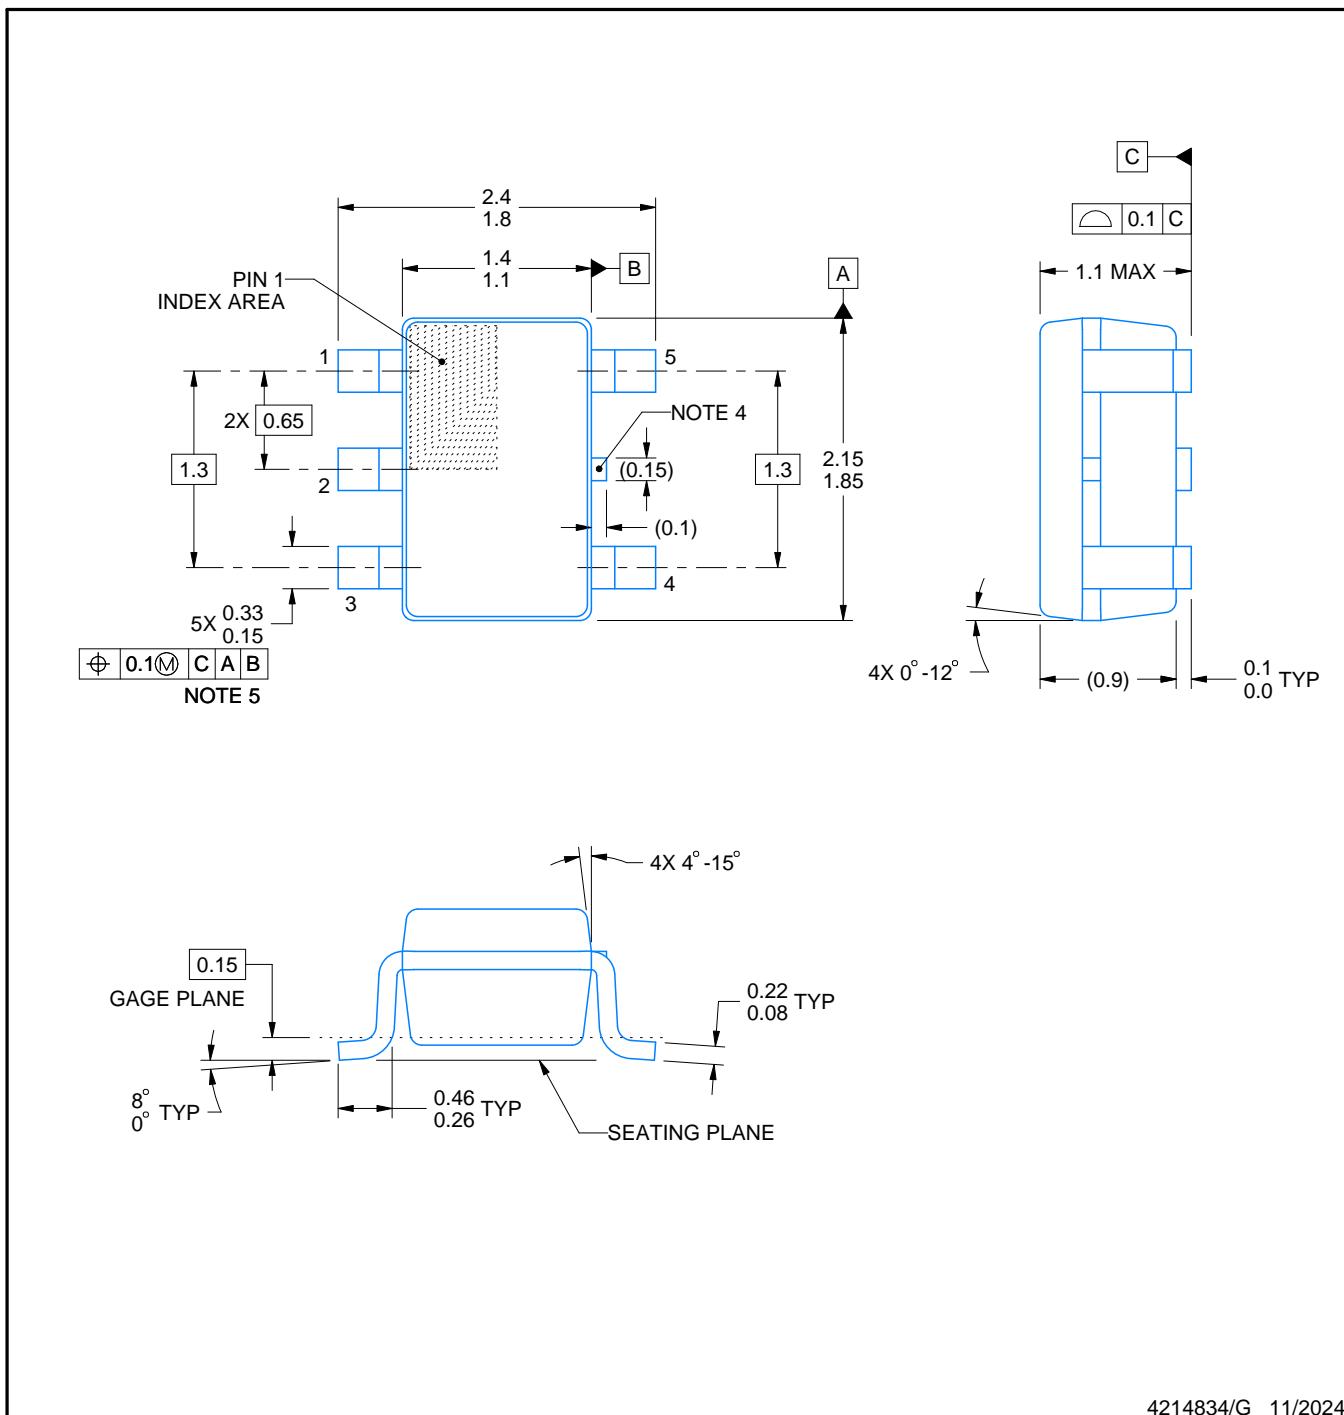

4214834/G 11/2024

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-203.
4. Support pin may differ or may not be present.
5. Lead width does not comply with JEDEC.
6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side

# EXAMPLE BOARD LAYOUT


DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

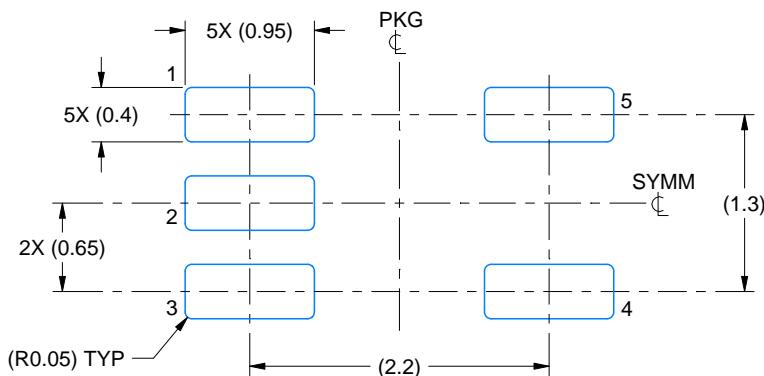

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

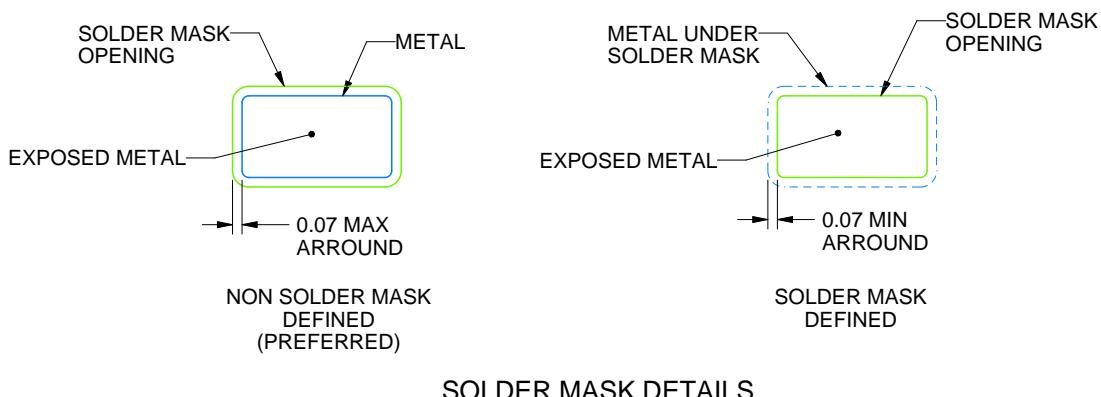

SOLDER MASK DETAILS

4214834/G 11/2024

NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.


8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

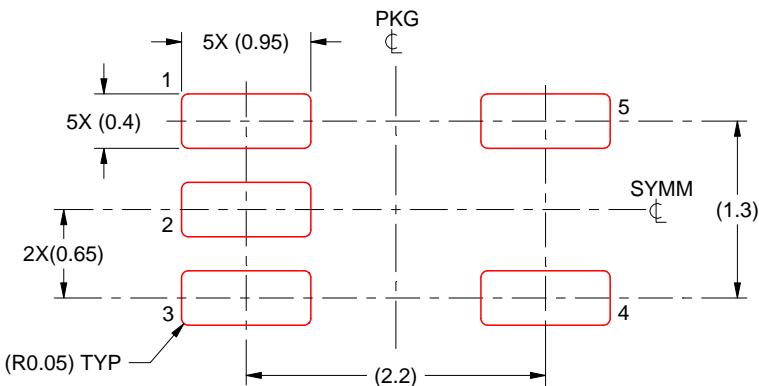

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:18X

4214834/G 11/2024

NOTES: (continued)

9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
10. Board assembly site may have different recommendations for stencil design.


## PACKAGE OUTLINE

DBV0005A



## **SOT-23 - 1.45 mm max height**

## SMALL OUTLINE TRANSISTOR

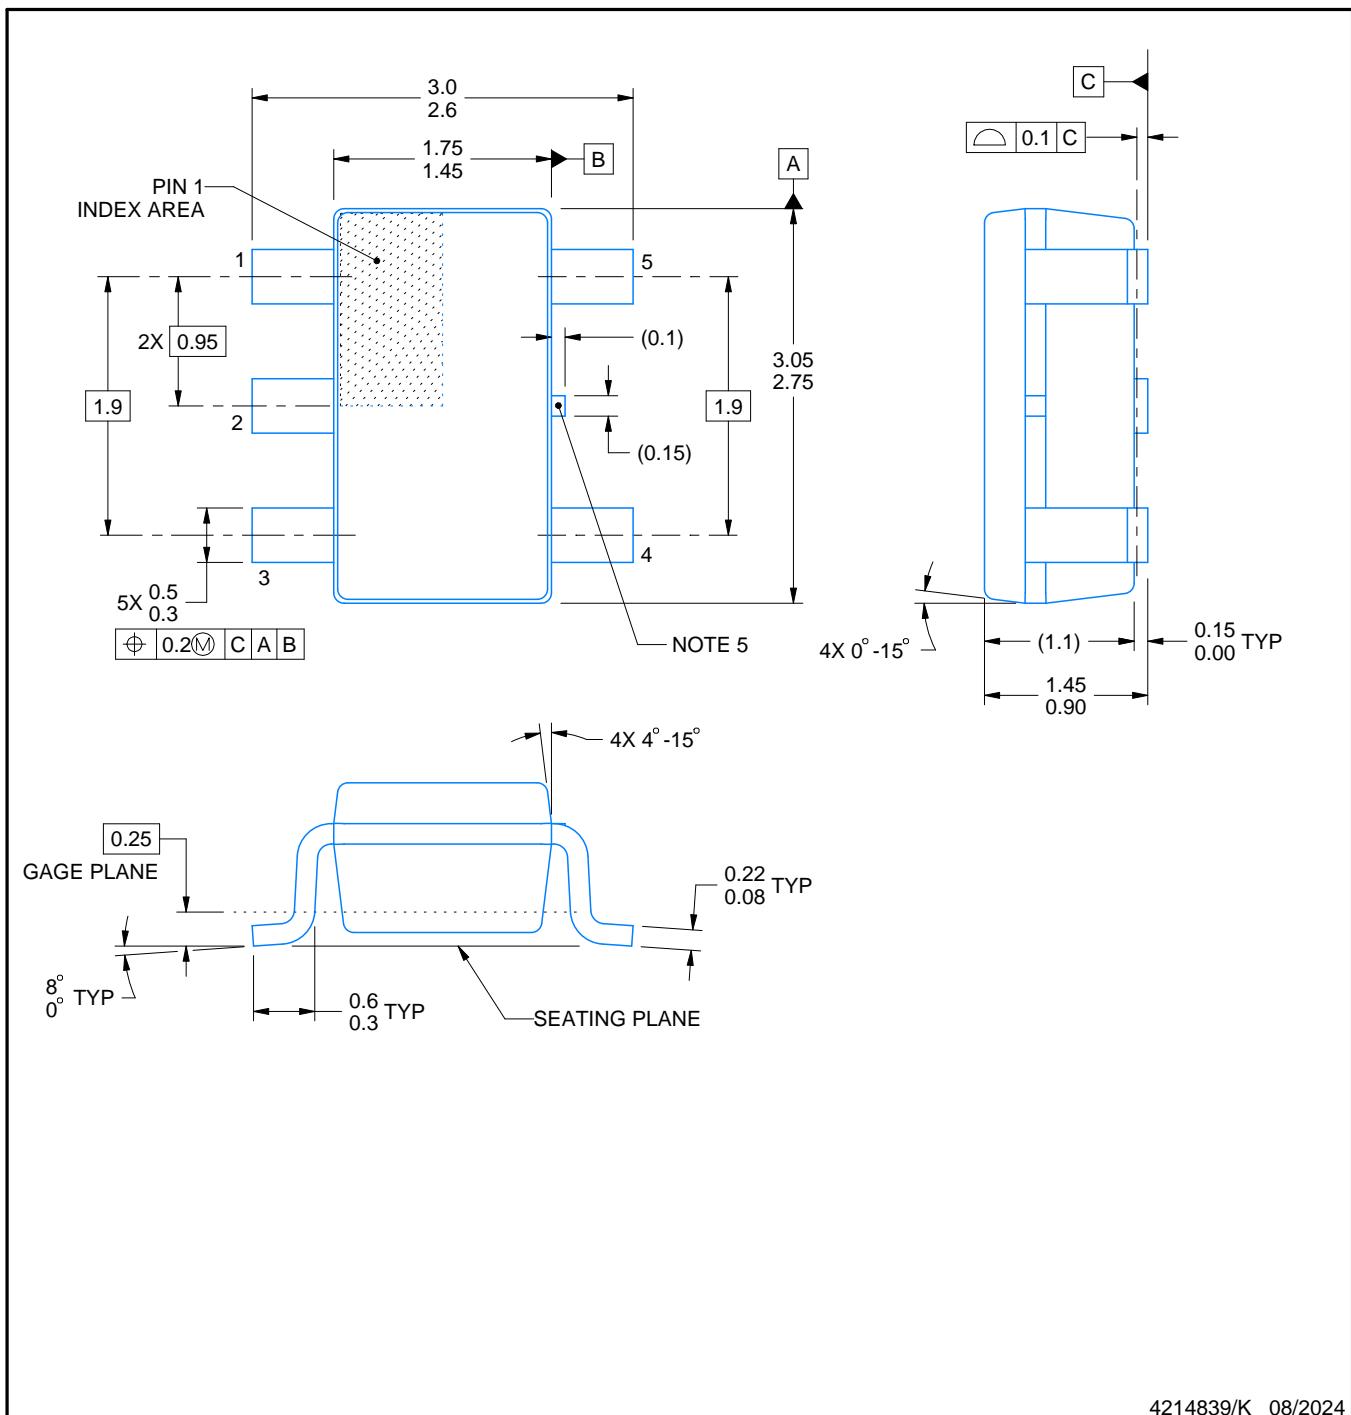

4214839/K 08/2024

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

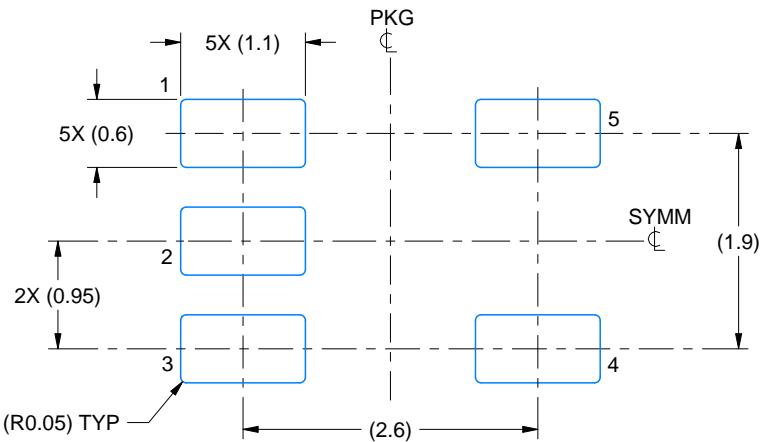

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

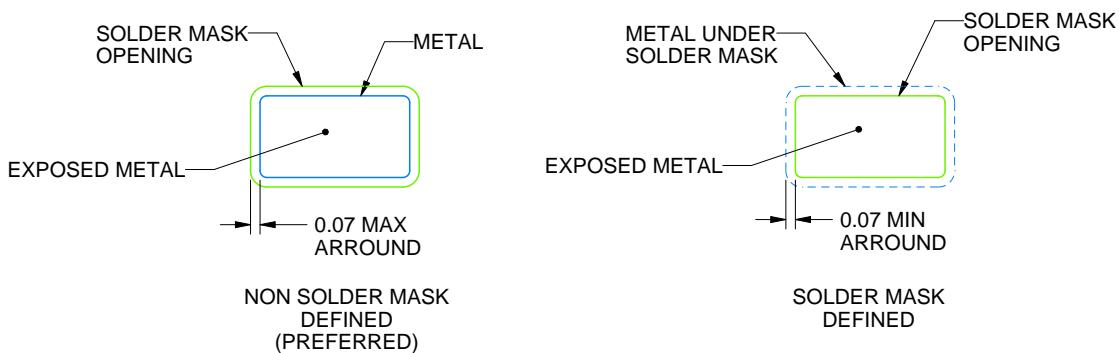

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

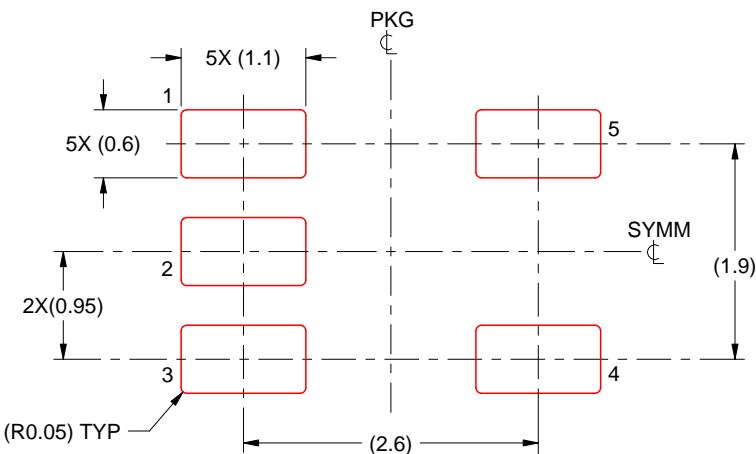

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

DRY 6

## GENERIC PACKAGE VIEW

### USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD




Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4207181/G


## PACKAGE OUTLINE

**DRY0006A**



## USON - 0.6 mm max height

## PLASTIC SMALL OUTLINE - NO LEAD

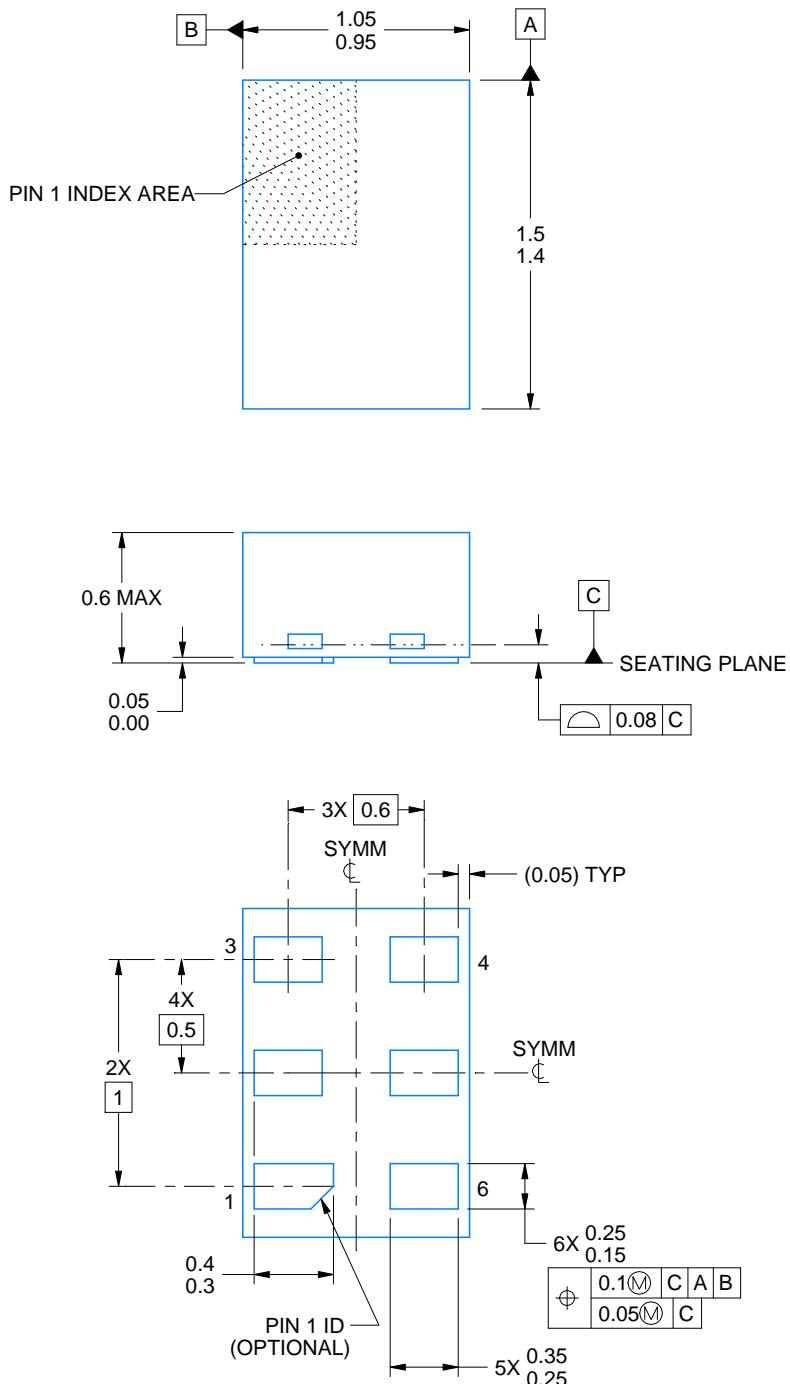

4222894/A 01/2018

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


DRY0006A

USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

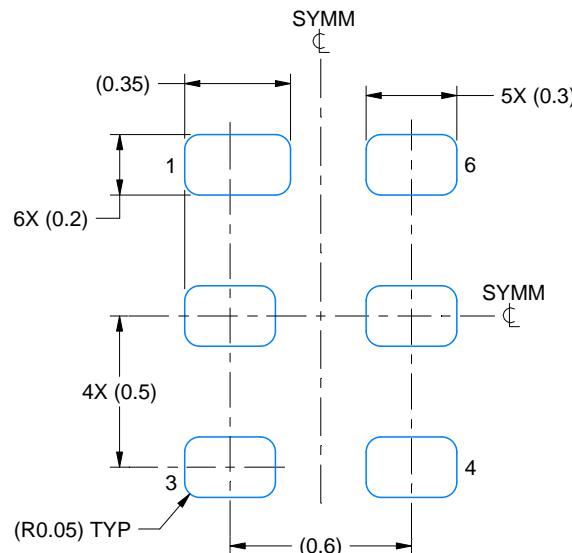

LAND PATTERN EXAMPLE  
1:1 RATIO WITH PKG SOLDER PADS  
EXPOSED METAL SHOWN  
SCALE:40X

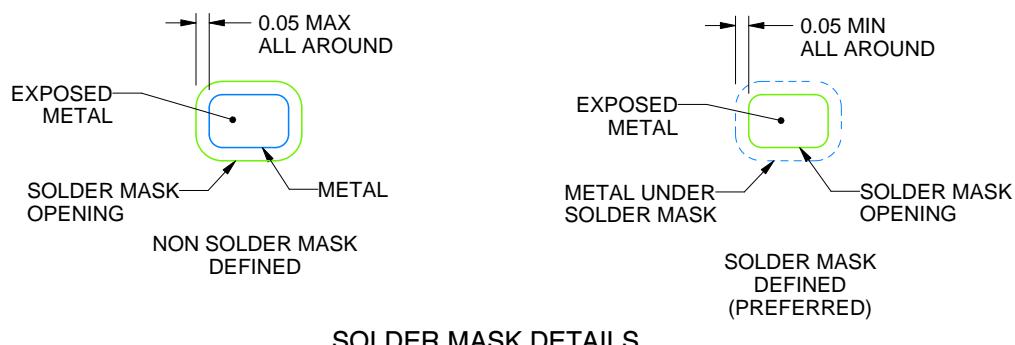

SOLDER MASK DETAILS

4222894/A 01/2018

NOTES: (continued)


3. For more information, see QFN/SON PCB application report in literature No. SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).

# EXAMPLE STENCIL DESIGN

DRY0006A

USON - 0.6 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

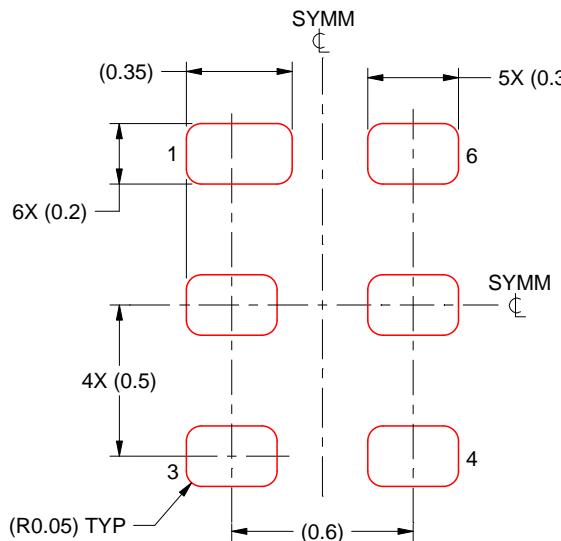

SOLDER PASTE EXAMPLE  
BASED ON 0.075 - 0.1 mm THICK STENCIL  
SCALE:40X

4222894/A 01/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.




# PACKAGE OUTLINE

**DSF0006A**

**X2SON - 0.4 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

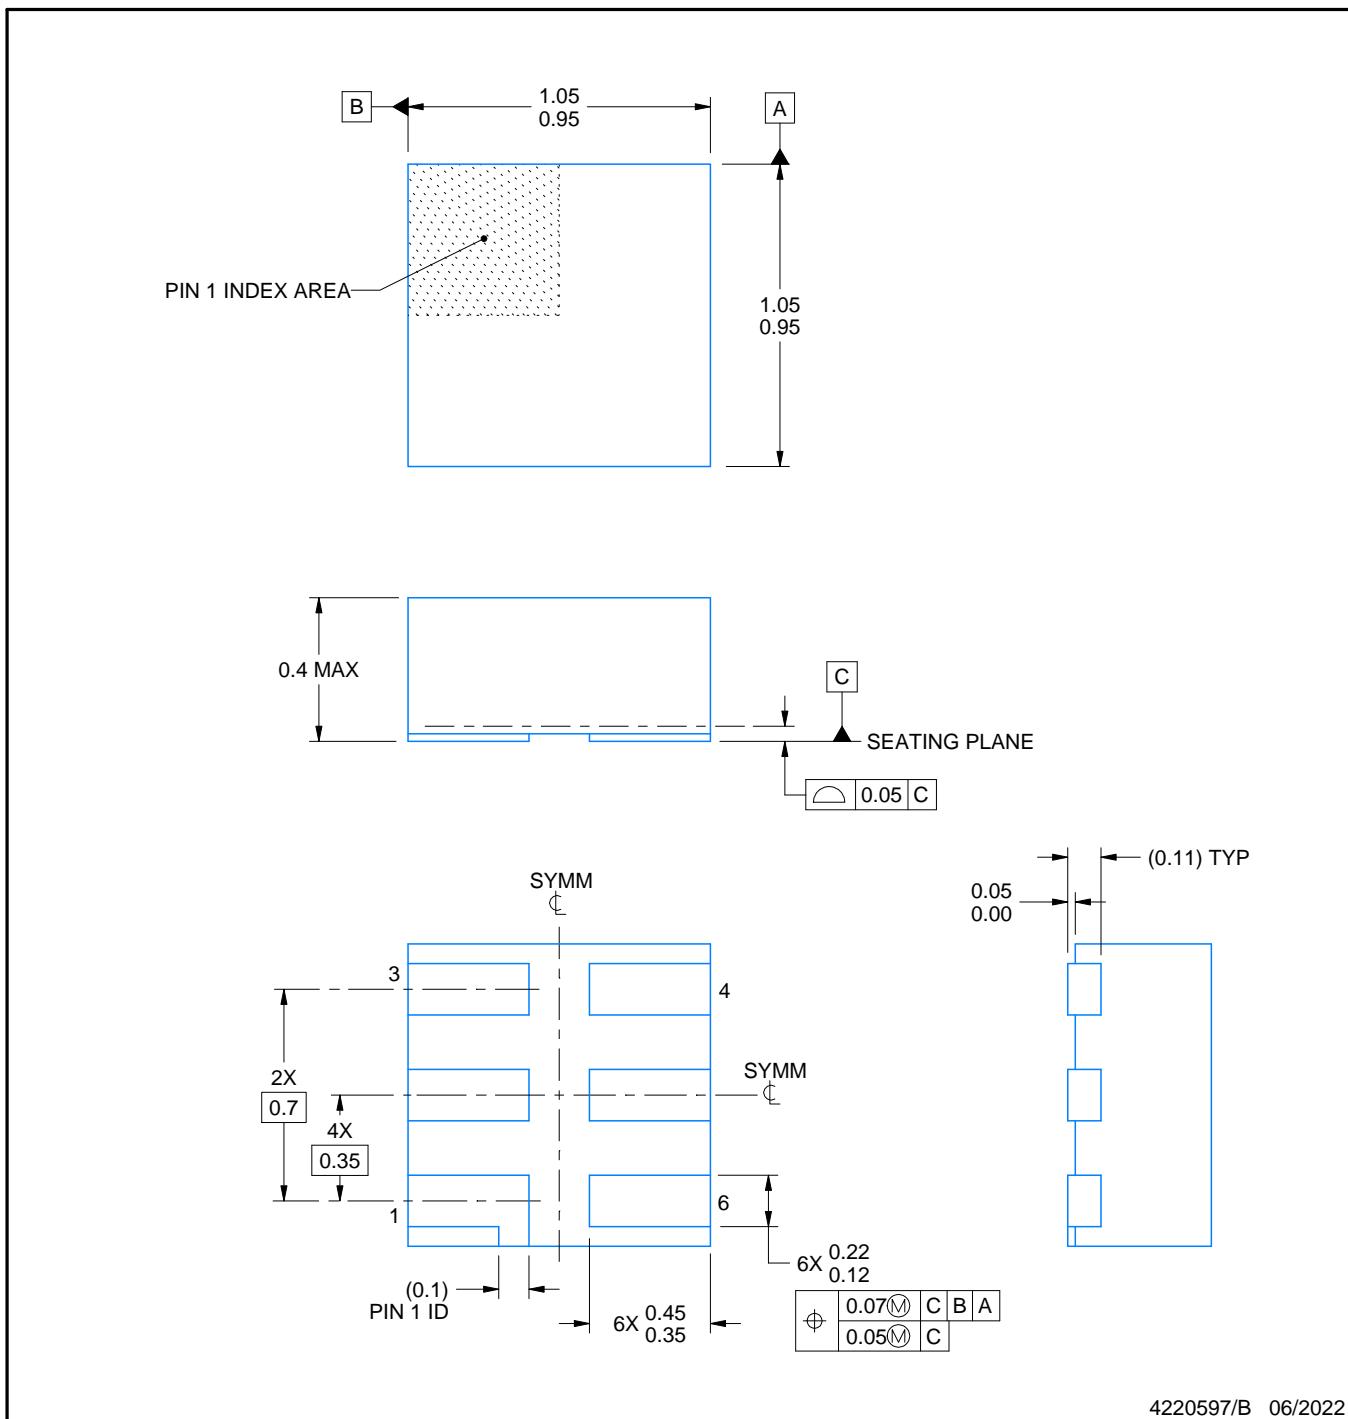

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC registration MO-287, variation X2AAF.

# EXAMPLE BOARD LAYOUT


DSF0006A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

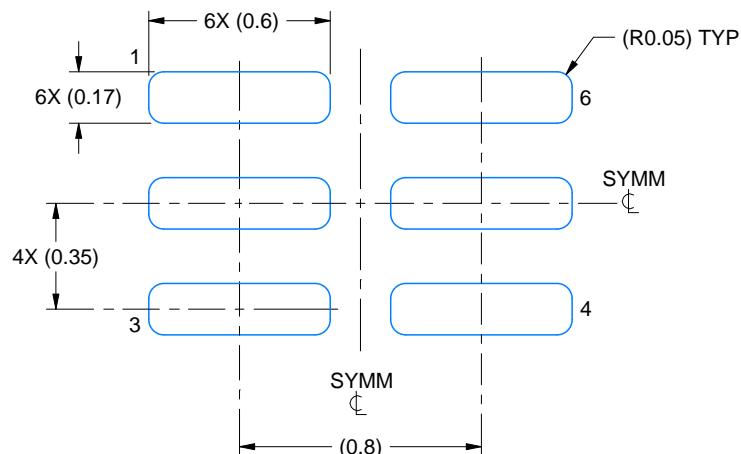

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:40X

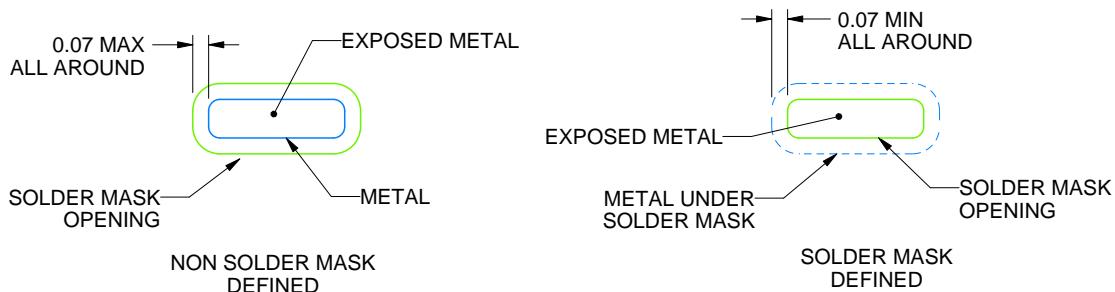

SOLDER MASK DETAILS

4220597/B 06/2022

NOTES: (continued)


4. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).

# EXAMPLE STENCIL DESIGN

DSF0006A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

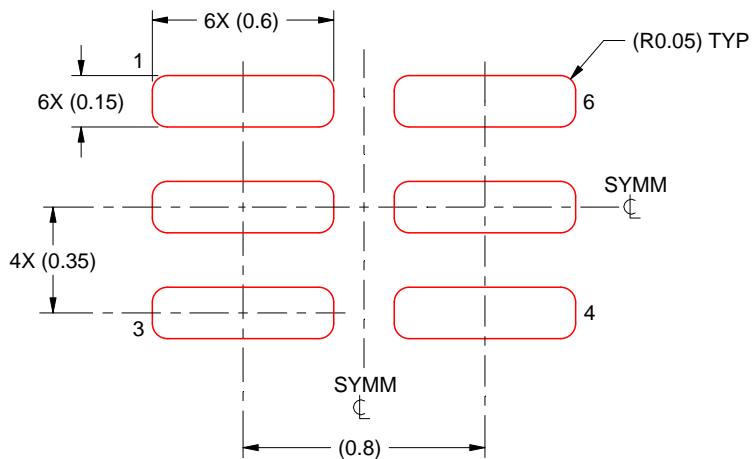

SOLDER PASTE EXAMPLE  
BASED ON 0.09 mm THICK STENCIL


PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:40X

4220597/B 06/2022

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


# PACKAGE OUTLINE

DRL0005A



SOT - 0.6 mm max height

PLASTIC SMALL OUTLINE

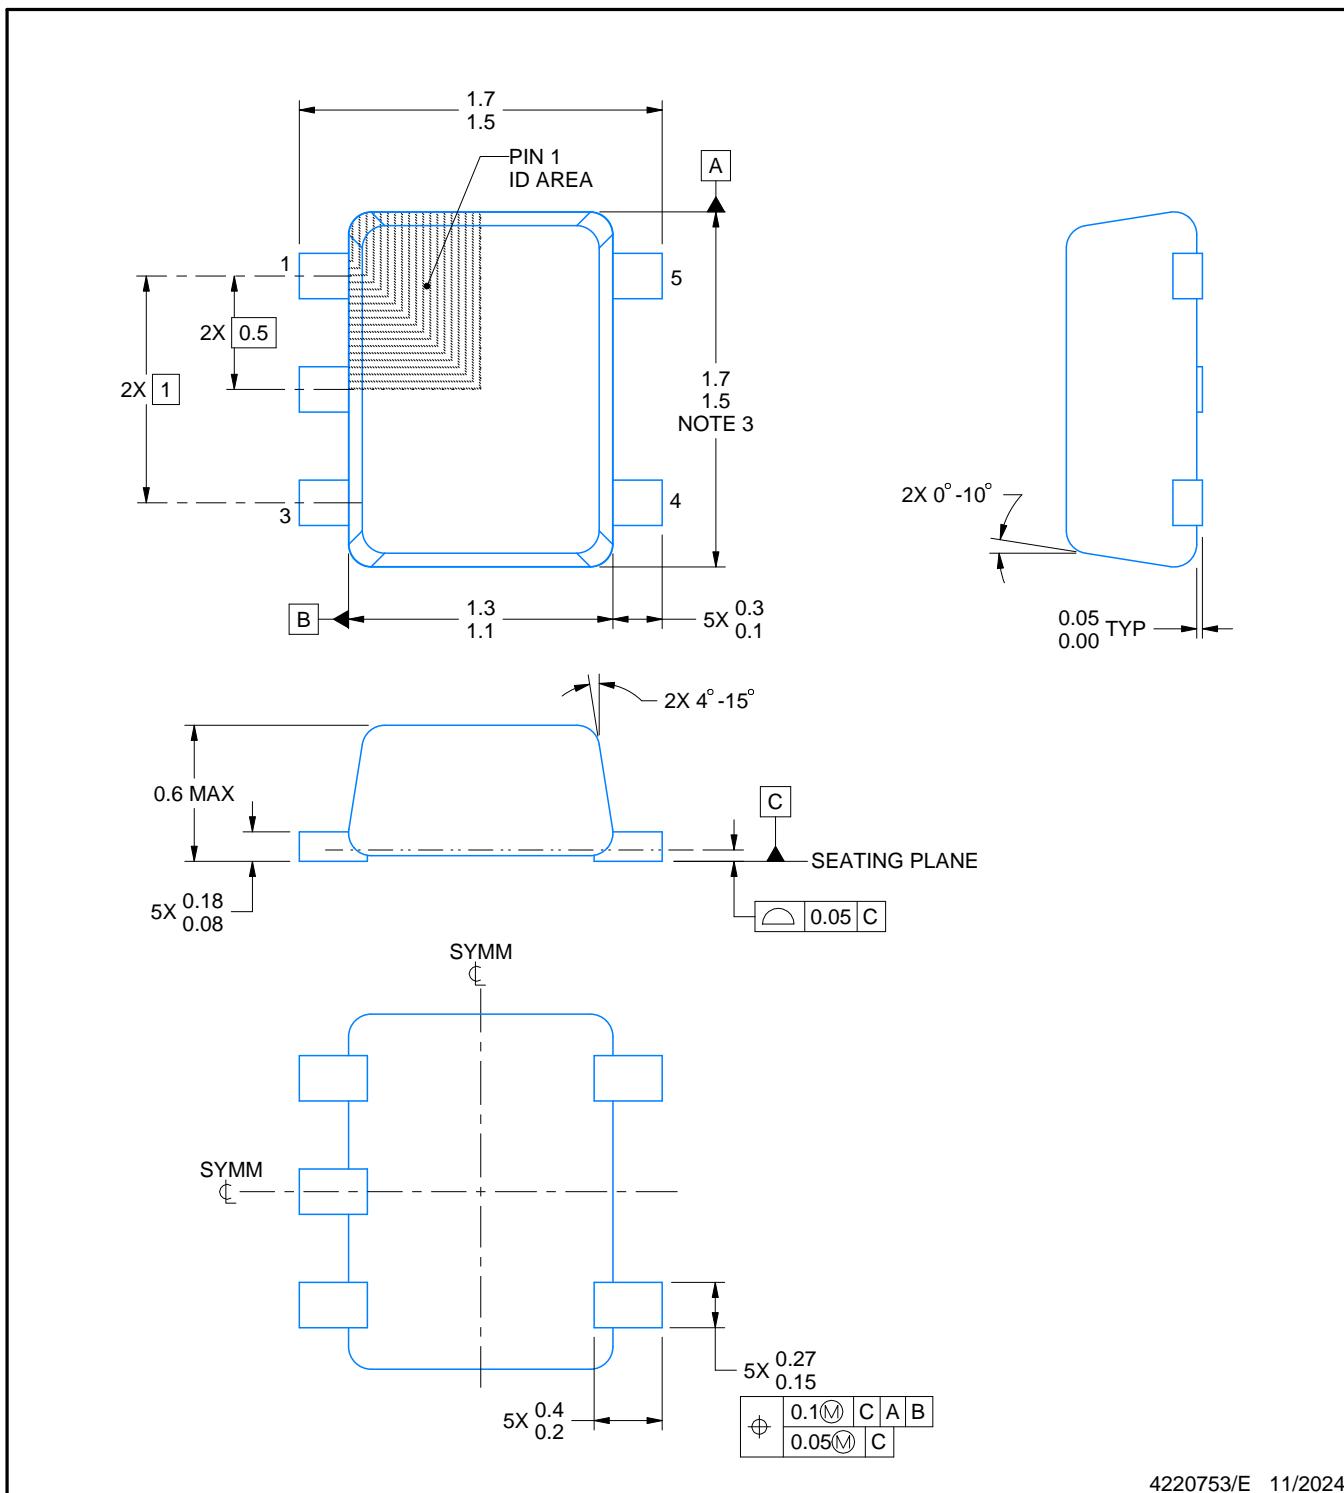

4220753/E 11/2024

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-293 Variation UAAD-1

# EXAMPLE BOARD LAYOUT



DRL0005A

SOT - 0.6 mm max height

PLASTIC SMALL OUTLINE

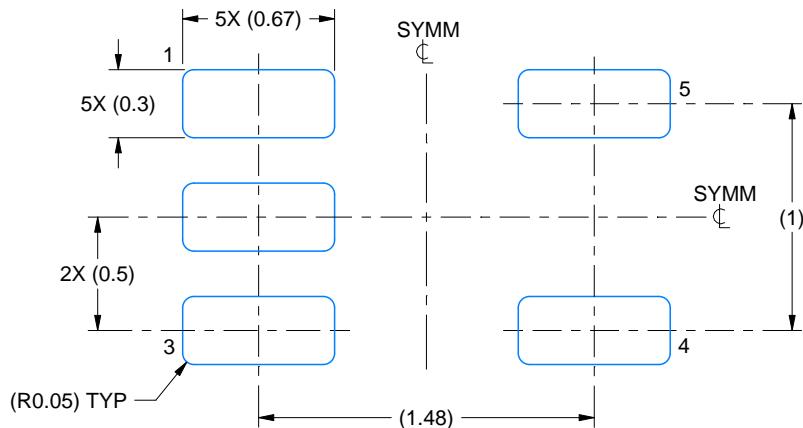

LAND PATTERN EXAMPLE  
SCALE:30X

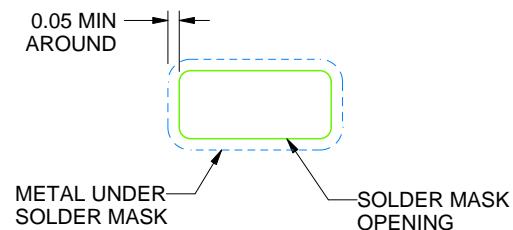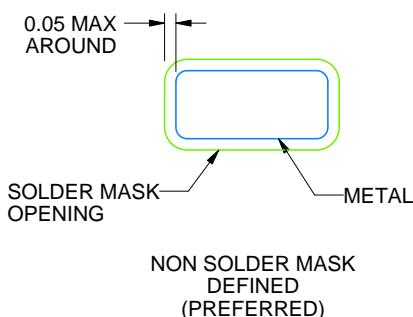

SOLDERMASK DETAILS

4220753/E 11/2024

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

DRL0005A

SOT - 0.6 mm max height

PLASTIC SMALL OUTLINE

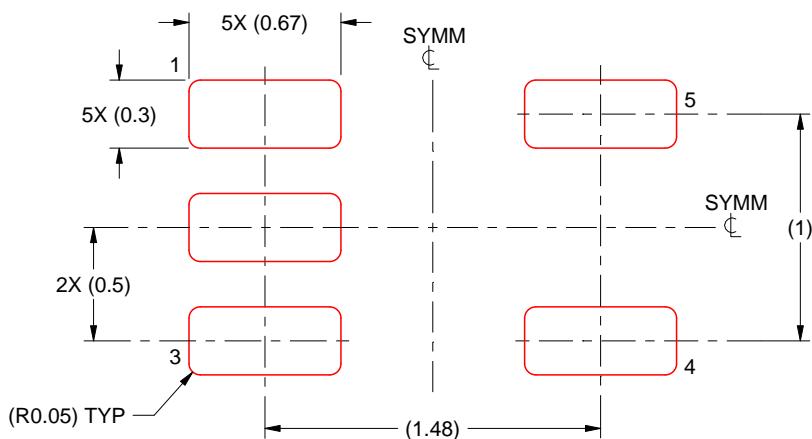

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:30X

4220753/E 11/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025