









CD54AC245, CD74AC245, CD54ACT245, CD74ACT245

SCHS245D - NOVEMBER 1998 - REVISED APRIL 2024

CDx4AC245, CDx4ACT245 Octal-Bus Transceiver, Three-State, Non-Inverting

1 Features

- **Buffered inputs**
- Typical propagation delay
 - 4ns at V_{CC} = 5V, T_A = 25°C, C_L = 50pF
- SCR-latchup-resistant CMOS process and circuit
- Speed of bipolar FAST™/AS/S with significantly reduced power consumption
- Balanced propagation delays
- AC types feature 1.5V to 5.5V operation and balanced noise immunity at 30% of the supply
- ± 24mA output drive current
 - Fanout to 15 FAST™ ICs
 - Drives 50Ω transmission line


2 Description

The 'AC245 and 'ACT245 are octal-bus transceivers that utilize Advanced CMOS Logic technology.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE(2)	BODY SIZE(3)							
CD74AC245/ CD74ACT245	N (PDIP, 20)	24.33mm × 9.4mm	24.33mm × 6.35mm							
	DW (SOIC, 20)	12.80mm × 10.3mm	12.80mm × 7.50mm							
CD54AC245/ CD54ACT245	J (CDIP, 20)	24.2mm × 7.62mm	24.2mm × 6.92mm							
CD74ACT245	DB (SSOP, 20)	7.2mm × 7.8mm	7.2mm × 5.3mm							

- For more information, see Section 10.
- The package size (length × width) is a nominal value and includes pins, where applicable.
- The body size (length × width) is a nominal value and does not include pins.

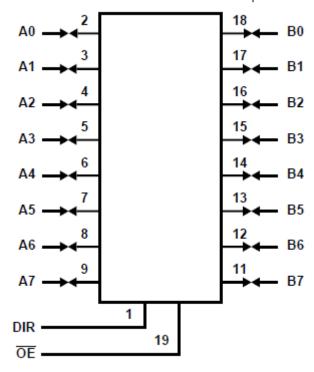

Logic Diagram (Positive Logic)



Table of Contents

The American Committee of the Committee	
7 Application and Implementation1	12
7.1 Power Supply Recommendations1	2
8.2 Receiving Notification of Documentation Updates1	13
· · · · · · · · · · · · · · · · · · ·	
	13
	4
3444568011	7.1 Power Supply Recommendations



3 Pin Configuration and Functions




Figure 3-1. CD54AC245, CD54ACT245 (CERDIP), CD74AC245, CD74ACT245 (PDIP, SOIC, SSOP) Top View

Pin Functions

	PIN	TYPE ¹	DESCRIPTION
NO.	NAME	ITPE.	DESCRIPTION
1	DIR	I/O	Direction Pin
2	A0	I/O	A1 Input/Output
3	A1	I/O	A2 Input/Output
4	A2	I/O	A3 Input/Output
5	A3	I/O	A4 Input/Output
6	A4	I/O	A5 Input/Output
7	A5	I/O	A6 Input/Output
8	A6	I/O	A7 Input/Output
9	A7	I/O	A8 Input/Output
10	GND	_	Ground Pin
11	B7	I/O	B7 Input/Output
12	B6	I/O	B6 Input/Output
13	B5	I/O	B5 Input/Output
14	B4	I/O	B4 Input/Output
15	В3	I/O	B3 Input/Output
16	B2	I/O	B2 Input/Output
17	B1	I/O	B1 Input/Output
18	В0	I/O	B0 Input/Output
19	ŌĒ	I/O	Output Enable
20	V _{CC}	_	Power Pin

⁽¹⁾ Signal Types: I = Input, O = Output, I/O = Input or Output



4 Specifications

4.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
V _{CC}	Supply voltage		-0.5	6	V
I _{IK}	Input diode current	$V_{I} < -0.5V \text{ or } V_{I} > V_{CC} + 0.5V$		± 20	mA
I _{OK}	Output diode current	V_{O} < -0.5V or V_{O} > V_{CC} + 0.5V		± 50	mA
I _O	Output source or sink current per output pin	$V_{O} > -0.5 V \text{ or } V_{O} < V_{CC} + 0.5 V$		± 50	mA
I _{OK} (2)	V _{CC} or ground current	I _{CC} or I _{GND}		± 100	mA
T _{stg}	Storage temperature		-65	150	°C

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

4.2 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			CDx4AC	245	CDx4AC	UNIT	
			MIN	MAX	MIN	MAX	UNII
V _{CC}	Supply voltage ⁽¹⁾		1.5V	5.5V	4.5V	5.5V	V
V _I , V _O	Input or Output Voltage		0V	V _{CC}	0V	V _{CC}	V
		1.5V to 3V		50			
dt/dv	Input Rise and Fall Slew Rate	3.6V to 5.5V		20			ns
		4.5V to 5.5V				10	
T _A	Temperature range	-	-55	125	-55	125	°C

⁽¹⁾ Unless otherwise specified, all voltages are referenced to ground.

4.3 Thermal Information

		C	CDx4AC14/ CDx4ACT14					
	THERMAL METRIC ⁽¹⁾	N (PDIP)	N (PDIP) DW (SOIC) DB (SSOP)					
			20 PINS					
$R_{\theta JA}$	Junction-to-ambient thermal resistance	69	98.6	105.4	°C/W			

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

⁽²⁾ For up to 4 outputs per device, add ±25mA for each additional output.



4.4 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

DAD	AMETER	TEST CONDITIONS	3		$T_A = 2$	5°C │	-40°C TO	85°C	-55°C TO	125°C	LINUT
PAR	AMETER	V _I (V)	I _O (mA)	V _{CC}	MIN	MAX	MIN	MAX	MIN	MAX	UNIT
AC TY	PES										
	High			1.5	1.2		1.2		1.2		
V_{IH}	-level input			3	2.1		2.1		2.1		V
	voltage			5.5	3.85		3.85		3.85		
	Low-			1.5		0.3		0.3		0.3	
V_{IL}	level input	V _{IL}		3		0.9		0.9		0.9	V
	voltage			5.5		1.65		1.65		1.65	
			-0.05	1.5	1.4		1.4		1.4		
			-0.05	3	2.9		2.9		2.9		
	High		-0.05	4.5	4.4		4.4		4.4		
V_{OH}	-level output	V _{IH} or V _{IL}	-4	3	2.58		2.48		2.4		VV_{OH}
	voltage		-24	4.5	3.94		3.8		3.7		
			-75	5.5			3.85				
			-50	5.5					3.85		
			0.05	1.5 V		0.1		0.1	,	0.1	
			0.05	3 V		0.1		0.1	,	0.1	
	Low-		0.05	4.5 V		0.1		0.1		0.1	
V _{OL}	level output	V _{IH} or V _{IL}	12	3 V		0.36		0.44		0.5	V
	voltage		24	4.5 V		0.36		0.44		0.5	
			75 ¹	5.5 V				1.65	,		
			50 ¹	5.5 V					,	1.65	
I _I	Input leakage current	V _{CC} or GND		5.5		± 0.1		± 1		± 1	μА
I _{OZ}	Three- state leakage current	V_{IH} or V_{IL} , $VO = V_{CC}$ or GND		5.5 V		± 0.5		± 5		± 10	μА
I _{CC}	Quiesce nt supply current MSI	V _{CC} or GND	0	5.5 V		8		80		160	μА
ACT T	YPES		1								
V _{IH}	High- level input voltage			4.5 V to 5.5 V	2		2		2		٧
V _{IL}	Low- level input voltage			4.5 V to 5.5 V		0.8		0.8		0.8	٧
			-0.05	4.5 V	4.4		4.4		4.4	0.8	
. ,	High- level		-24	4.5 V	3.94		3.8		3.7		1
V_{OH}	output	V _{IH} or V _{IL}	-75 ¹	5.5 V			3.85				V
	voltage	nge	-50	5.5 V					3.85		



over recommended operating free-air temperature range (unless otherwise noted)

DAD	AMETER	TEST CONDITIONS		, , , , , , , , , , , , , , , , , , ,	T _A = 25	°C	-40°C TO 85°C	-55°C TO 125°C	UNIT
PARA	AMETER	V _I (V)	I _O (mA)	V _{CC}	MIN MAX		MIN MAX	MIN MAX	UNII
	Low-		0.05	4.5		0.1	0.1	0.1	
	V _{OL} level output	\/ or\/	24	4.5		0.36	0.44	0.5	v
VOL		V _{IH} or V _{IL}	75 ¹	5.5			1.65		v
voltage		50 ¹	5.5				1.65		
									V
I _I	Input leakage current	V _{CC} or GND		5.5 V		± 0.1	±1	±1	μА
I _{OZ}	Three- state or leakage current	V_{IH} or $V_{IL}V_{O} = V_{CC}$ or GND		5.5 V		± 0.5	± 5	± 10	μA
I _{CC}	Quiesce nt supply current MSI	V _{CC} or GND	0	5.5 V		8	80	160	μА
ΔI _{CC}	Addition al supply current per input pin TTL inputs high 1 unit load	V _{CC} -2.1		4.5 to 5.5		2.4	2.8	3	mA

1. Test one output at a time for a 1-second maximum duration. Measurement is made by forcing current and measuring voltage to minimize power dissipation. Test verifies a minimum 50Ω transmission-line-drive capability at 85° C, 75Ω at 125° C.

4.5 Switching Characteristics

Input t_r , t_f = 3ns, C_L = 50pF (Worst Case). Over recommended operating free-air temperature range (unless otherwise noted) (see Load Circuit and Voltage Waveforms)

	PARAMETER	V 00	-40°C TO 85°C			-55°C TO 125°C			LINIT
PARAMETER		V _{cc} (V)	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
AC TYPE	S				•				
	1.5			96			106		
t_{PLH},t_{PHL}	Propagation delay, data to output	3.3	3.2		10.8	3		11.9	ns
	Catput	5	2.2		7.7	2.1		8.5	
		1.5			159			175	ns
	Propagation delay, output disable to output	3.3	4.7		15.9	4.4		17.5	
	albabio to output	5	3.7		12.7	3.5		14	
		1.5			159			175	
t _{PZL} , t _{PZH}	Propagation delay, output enable to output	3.3	5.6		19	5.3		21	ns
	chasic to cutput	5	3.7		12.7	3.5			
V _{OHV}	Minimum (Valley) V _{OH} During switching of other outputs (output under test not switching)	5	4	at 25°C			4 at 25°C		V



Input t_r , t_f = 3ns, C_L = 50pF (Worst Case). Over recommended operating free-air temperature range (unless otherwise noted) (see Load Circuit and Voltage Waveforms)

	PARAMETER	V 00	-40°C TO 85°C			-55°C TO 125°C			LINUT
FARAIVIETER		V _{CC} (V)	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
V _{OLP}	Maximum (Peak) V _{OL} During switching of other outputs (output under test not switching)	5	1	at 25°C			1 at 25°C		V
Co	Three-state output capacitance			15			15		pF
Cı	Input capacitance				10			10	pF
C _{PD}	Power dissipation capacitance			57			57		pF
ACT TYP	ES								
t _{PLH} , t _{PHL}	Propagation delay, data to output	5	2.7		9.1	2.5		10	ns
t _{PLZ} , t _{PHZ}	Propagation delay, output disable to output	5	3.7		12.7	3.5		14	ns
t _{PZL} , t _{PZH}	Propagation delay, output enable to output	5	3.8		13.1	3.6		14.4	ns
V _{OHV}	Minimum (Valley) V _{OH} During switching of other outputs (output under test not switching)	5	4	at 25°C			4 at 25°C		V
V_OLP	Maximum (Peak) V _{OL} During switching of other outputs (output under test not switching)	5	1	at 25°C			1 at 25°C		V
Co	Three-state output capacitance			15			15		pF
Cı	Input capacitance				10			10	pF
C _{PD}	Power dissipation capacitance			57			57		pF

- 1. Limits tested 100%
- 2. 3.3V Min is at 3.6V, Max is at 3V
- 3. 5V Min is at 5.5V, Max is at 4.5V
- 4. CPD is used to determine the dynamic power consumption per channel
 - AC: PD = VCC2 fi (CPD + CL)
 - ACT: PD = VCC2 fi (CPD + CL) + VCC ∆ ICC where fi = input frequency, CL = output load capacitance, VCC = supply voltage



4.6 Timing Diagrams

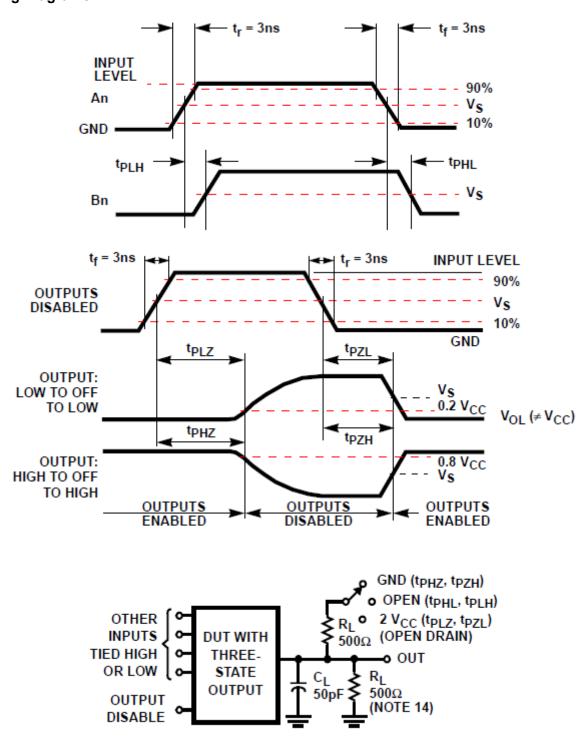


Figure 4-1. THREE-STATE PROPAGATION DELAY TIMES AND TEST CIRCUIT

Figure 4-1. SIMULTANEOUS SWITCHING TRANSIENT WAVEFORMS


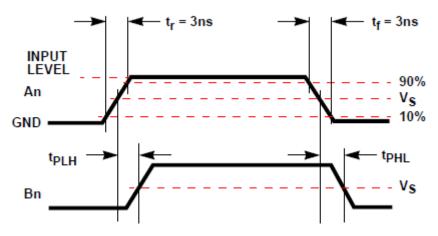


Figure 4-3. PROPAGATION DELAY TIMES



NOTE: For AC Series Only: When V_{CC} = 1.5V, R_L = 1k Ω .


Table 4-1.

	AC	ACT
Input Level	Vcc	3V
Input Switching Voltage, V _S	0.5 V _{CC}	1.5V
Output Switching Voltage, V _S	0.5 V _{CC}	0.5 V _{CC}


Figure 4-4. PROPAGATION DELAY TIMES




5 Parameter Measurement Information




PARA	PARAMETER		CL	S1	S2
	t _{PZH}	1 k Ω	50 pF	Open	Closed
t _{en}	t _{PZL}	1 K22	or 150 pF	Closed	Open
	t _{PHZ}	1 k Ω	50 pF	Open	Closed
t _{dis}	t _{PLZ}	1 K32	50 pr	Closed	Open
t _{pd} or	t _{pd} or t _t		50 pF or 150 pF	Open	Open

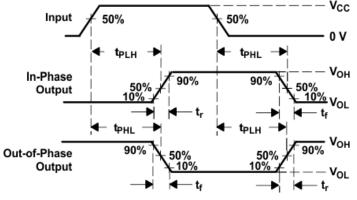

VOLTAGE WAVEFORMS
PROPAGATION DELAY AND OUTPUT TRANSITION TIMES





VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES FOR 3-STATE OUTPUTS




6 Detailed Description

6.1 Overview

The 'AC245 and 'ACT245 are non-inverting three-state bidirectional transceiver-buffers intended for two-way transmission from "A" bus to "B" bus or "B" bus to "A". The logic level present on the direction input (DIR) determines the data direction. When the output enable input (\overline{OE}) is HIGH, the outputs are in the high-impedance state.

6.2 Functional Block Diagram

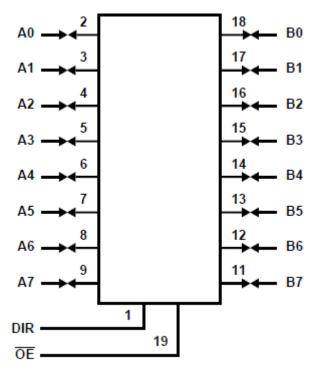

Logic Diagram (Positive Logic)

6.3 Device Functional Modes

Function Table lists the function modes of the CDx4AC245, CDx4ACT245.

Table 6-1. Function Table

INPU	TS ⁽¹⁾	OPERATION
ŌĒ	DIR	OFERATION
L	L	B data to A bus
L	Н	A data to B bus
Н	Х	Isolation

(1) H = High Voltage Level, L = Low Voltage Level, X = Don't Care

7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply voltage rating located in the Section 4.2.

Each V_{CC} pin should have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1 μ F is recommended; if there are multiple V_{CC} pins, then 0.01 μ F or 0.022 μ F is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1 μ F and a 1 μ F are commonly used in parallel. The bypass capacitor should be installed as close to the power pin as possible for best results.

7.2 Layout

7.2.1 Layout Guidelines

When using multiple-bit logic devices, inputs should never float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins should not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Section 7.2.2 specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that should be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or V_{CC} , whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver. If the transceiver has an output enable pin, it will disable the output section of the part when asserted. This will not disable the input section of the IOs, so they cannot float when disabled.

7.2.2 Layout Example

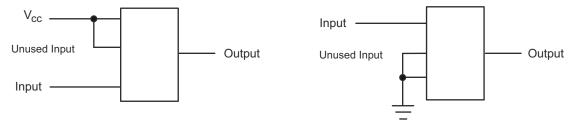


Figure 7-1. Layout Diagram



8 Device and Documentation Support

8.1 Documentation Support

8.1.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 8-1. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
CD54AC245	Click here	Click here	Click here	Click here	Click here
CD74AC245	Click here	Click here	Click here	Click here	Click here
CD54ACT245	Click here	Click here	Click here	Click here	Click here
CD74ACT245	Click here	Click here	Click here	Click here	Click here

8.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

8.3 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

8.4 Trademarks

TI E2E[™] is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

8.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

8.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision C (May 2023) to Revision D (April 2024)

Page

Changes from Revision B (April 2002) to Revision C (May 2023)

Page

Added Package Information table, Pin Functions table, and Thermal Information table......



10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com

31-Oct-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
CD54AC245F3A	Active	Production	CDIP (J) 20	20 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	CD54AC245F3A
CD54AC245F3A.A	Active	Production	CDIP (J) 20	20 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	CD54AC245F3A
CD54ACT245F3A	Active	Production	CDIP (J) 20	20 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	CD54ACT245F3A
CD54ACT245F3A.A	Active	Production	CDIP (J) 20	20 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	CD54ACT245F3A
CD74AC245E	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74AC245E
CD74AC245E.A	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74AC245E
CD74AC245EE4	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74AC245E
CD74AC245M	Obsolete	Production	SOIC (DW) 20	-	-	Call TI	Call TI	-55 to 125	AC245M
CD74AC245M96	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	AC245M
CD74AC245M96.A	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	AC245M
CD74ACT245E	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74ACT245E
CD74ACT245E.A	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74ACT245E
CD74ACT245EE4	Active	Production	PDIP (N) 20	20 TUBE	Yes	NIPDAU	N/A for Pkg Type	-55 to 125	CD74ACT245E
CD74ACT245M	Obsolete	Production	SOIC (DW) 20	-	-	Call TI	Call TI	-55 to 125	ACT245M
CD74ACT245M96	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	(ACT245, ACT245M)
CD74ACT245M96.A	Active	Production	SOIC (DW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	(ACT245, ACT245M)
CD74ACT245SM96	Active	Production	SSOP (DB) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	(ACT245, ACT245SM)
CD74ACT245SM96.A	Active	Production	SSOP (DB) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-55 to 125	(ACT245, ACT245SM)

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

PACKAGE OPTION ADDENDUM

www.ti.com 31-Oct-2025

(5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD54AC245, CD54ACT245, CD74AC245, CD74ACT245:

Catalog: CD74AC245, CD74ACT245

Military: CD54AC245, CD54ACT245


NOTE: Qualified Version Definitions:


- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

PACKAGE MATERIALS INFORMATION

www.ti.com 25-Aug-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74AC245M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74ACT245M96	SOIC	DW	20	2000	330.0	24.4	10.9	13.3	2.7	12.0	24.0	Q1
CD74ACT245M96	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
CD74ACT245SM96	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1



www.ti.com 25-Aug-2025




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
CD74AC245M96	SOIC	DW	20	2000	356.0	356.0	45.0
CD74ACT245M96	SOIC	DW	20	2000	356.0	356.0	45.0
CD74ACT245M96	SOIC	DW	20	2000	356.0	356.0	45.0
CD74ACT245SM96	SSOP	DB	20	2000	353.0	353.0	32.0

PACKAGE MATERIALS INFORMATION

www.ti.com 25-Aug-2025

TUBE

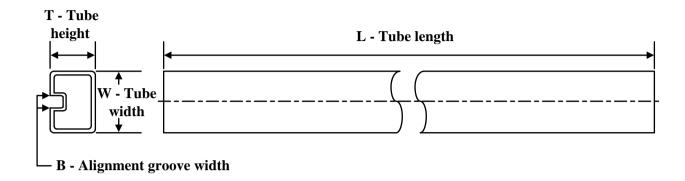


*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
CD74AC245E	N	PDIP	20	20	506	13.97	11230	4.32
CD74AC245E.A	N	PDIP	20	20	506	13.97	11230	4.32
CD74AC245EE4	N	PDIP	20	20	506	13.97	11230	4.32
CD74ACT245E	N	PDIP	20	20	506	13.97	11230	4.32
CD74ACT245E.A	N	PDIP	20	20	506	13.97	11230	4.32
CD74ACT245EE4	N	PDIP	20	20	506	13.97	11230	4.32



SMALL OUTLINE PACKAGE

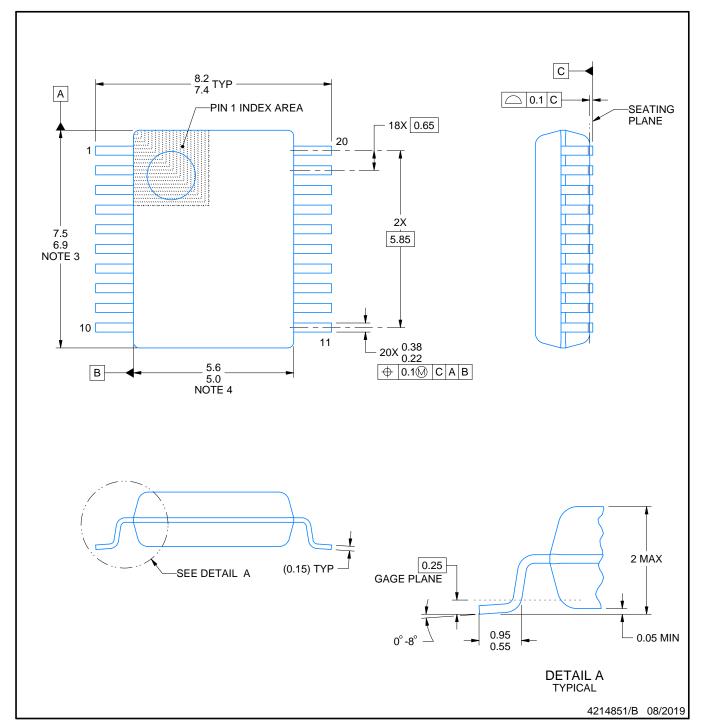


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.



SMALL OUTLINE PACKAGE

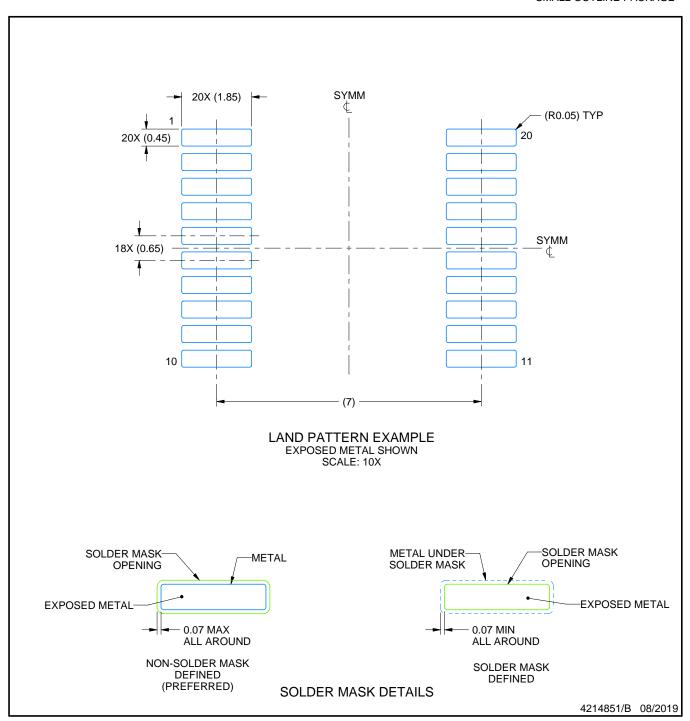


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

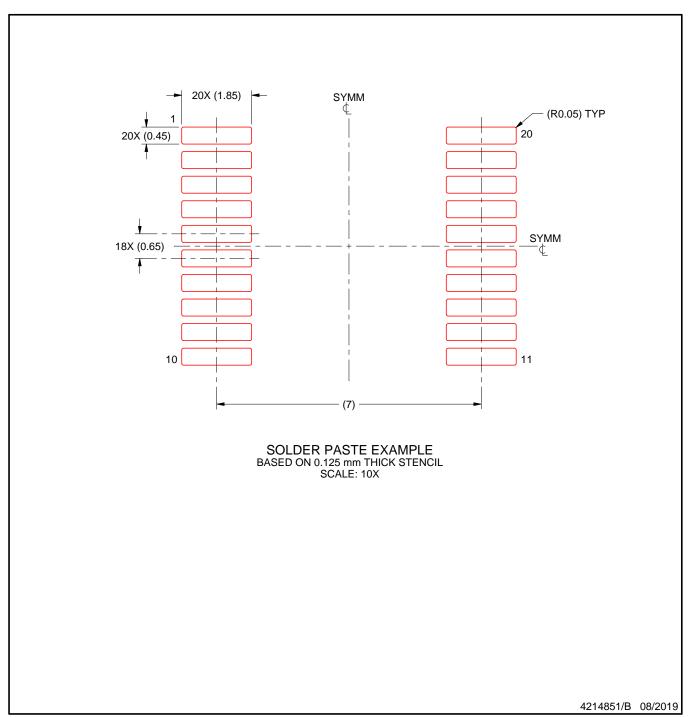

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN




- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SOIC

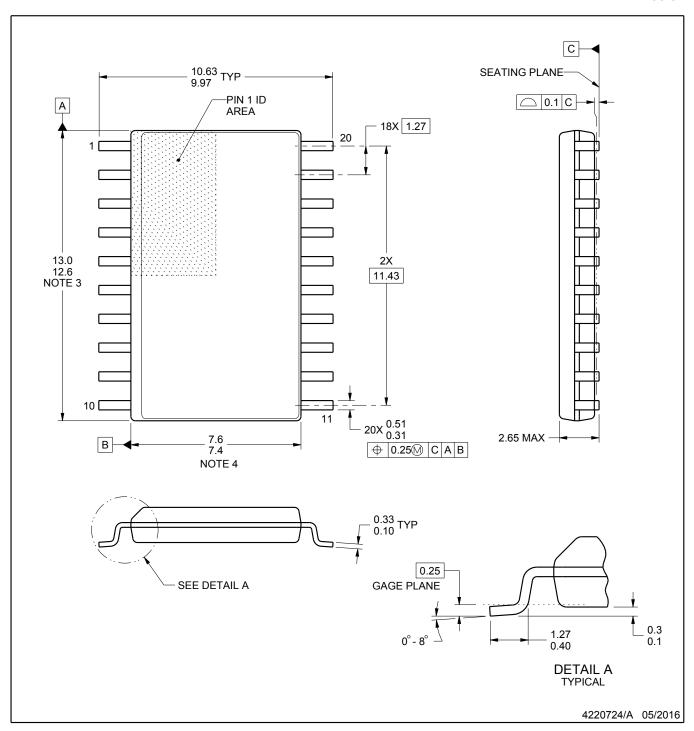


- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC

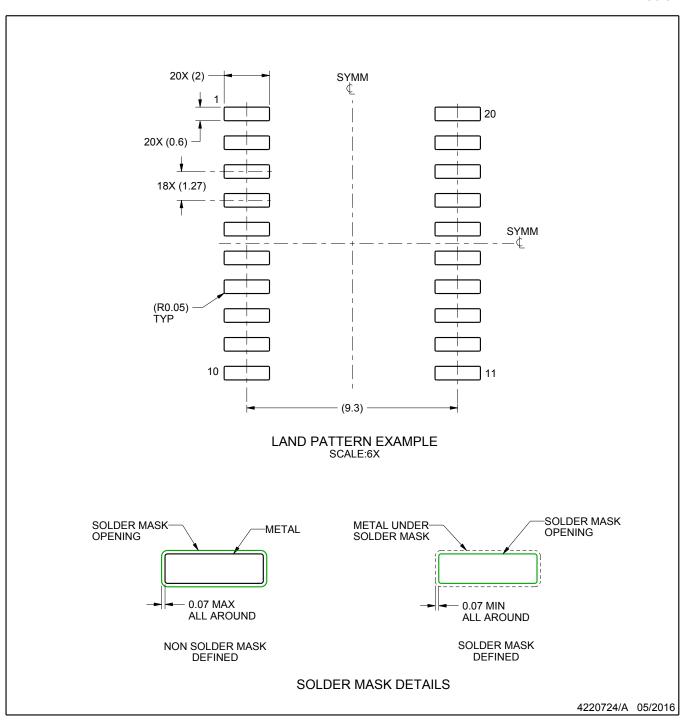


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC

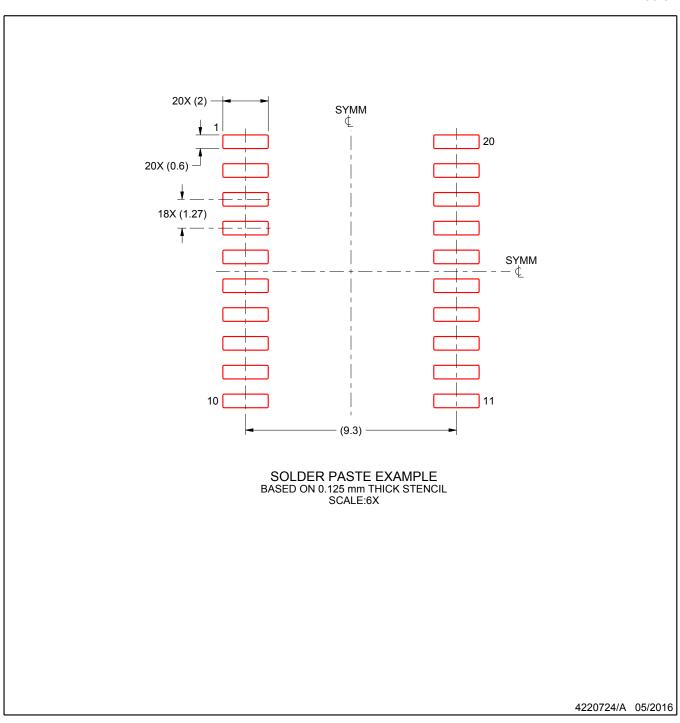

NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025