

# Carrier Class, High Density VoP

White Paper

William E. Witowsky  
Senior Vice President Engineering &  
Chief Technical Officer

Dennis R Gatens  
Product Management Director

Telogy Networks, Inc.  
A Texas Instruments Company

January 2001  
Version 1.6  
SPEY003

## Carrier Class, High Density VoP

### 1.0 INTRODUCTION

Packet-based voice has quickly evolved to enable a single network to deliver a new generation of business and consumer voice and data services. Carriers have announced that new network build out will be based on packet technology that supports a converged network that carries both voice and data.

Packet-based voice provides several advantages over circuit switched voice. Bandwidth required for a voice call can be significantly reduced through Voice Activity Detection (VAD) techniques and use of low bit rate CODECs. VAD removes silence, which accounts for as much as 40% of the voice information that is transmitted. Low bit rate CODECs reduce the amount of bandwidth for a voice call from 64 kbps to as little as 8 kbps.

Based on open standards, a packet-based voice and data infrastructure allows faster time to market for new services and enhancements with third party developers offering products to service providers. Capital investment for packet-based platforms is significantly less than circuit-switched equivalent. The savings in operational costs have been estimated at 40-50% by carriers based on the consolidation of platforms and network management applications.

*IP telephony has grown up and is now becoming part of the mainstream telecoms scene. All of the world's top telcos are exploiting IP telephony in some way, although few are reacting to the full breadth of its impact. Also, hundreds of new players are active Internet telephony service providers (ITSPs), and are generating revenues in what has almost become a new industry.*

*Exploiting Market Opportunities, An Ovum Report-December 2000*

In a few short years packet-based voice has evolved from a technology demonstration to an integral part of next generation networks and services. The accelerated pace at which this technology has evolved can be attributed to some key factors:

- VoP technology feasibility
- DSP-based technology with low power consumption and scalable channel density
- Enabling transport technologies, e.g. DSL, Cable
- Interoperability and standards

Early VoP applications were targeted at providing lower cost long distance services. One early application was transporting long distance voice traffic between certain cities that traditionally experienced a high volume of traffic, for example between Hong Kong and Vancouver. A second early application was carrying voice traffic between corporate facilities on their existing data network, significantly reducing the voice traffic expenses.

The VoP market is expected to grow from 7.7 billion minutes in the year 2000 to 570 billion minutes by 2005 (Probe Research).

It is clear that a wide range of consumer and business services will be available utilizing packet-based voice as part of bundled voice and data service offerings. VoP gateways are being implemented for a number of

applications ranging from small two port Integrated Access Devices (IADs) for the consumer and telecommuter to very large carrier class gateways used as Class 5 switch replacements.

Many technical barriers have been overcome to bring VoP technology to its current state. Large scale VoP networks have become increasingly feasible as DSP-based technology has been refined to provide lower power and higher densities with manufacturers meeting the challenge of interoperability. Silicon and software technology for VoP has evolved to support hundreds of channels and will soon support OC-3 channel density on a single chip (greater than 2000 channels). This paper will focus on understanding the requirements and architecture for high density VoP platforms with an emphasis on the elements required to implement VoP in carrier class applications that will meet the service providers expectations to deliver toll quality voice.

## **2.0 MEETING SERVICE PROVIDER REQUIREMENTS WITH SOLUTION DENSITY**

Service providers have a great deal to gain through VoP implementations. They envision new revenue opportunities in leveraging the open architecture of packet-based services to quickly bring to market new and enhanced services while reducing operating costs through the deployment of packet-based networks. Service providers, however, will not sacrifice the tradition of toll quality voice for the benefit of deploying a single converged infrastructure.

TI has developed the *solution density* concept to help service providers and platform developers more clearly understand and implement high density VoP. VoP solutions cannot be evaluated merely for the number of channels on a chip. From a system engineering perspective, a solution must be evaluated on how the combination of system elements deliver a complete solution with lowest power and smallest area without compromising voice quality and features. *Solution density* then, refers to the optimization of channel density, power, architecture, integration of system functions and I/O with the required software-based features for the targeted application (i.e. high density carrier class gateways).

The solution density concept provides a framework to evaluate solutions based on the integration of all major system elements and features by considering factors beyond just the number of channels and area for any single component. The following areas are important to service providers as they move to implement packet-based voice networks:

- Quality and reliability
- Scalability
- Flexibility

### ***Quality and Reliability***

Standards for VoP quality and network reliability are the same as for traditional telephone networks. Customers expect service quality to be consistent with traditional telephone networks. Packet based voice is transparent to the customer. High density VoP implementations are often discussed in terms of *carrier class* or *toll quality* which are universally associated with the high quality voice services. These terms set the expectation for quality for service providers and, more importantly, their customers.

Features such as tone processing, packet playout, voice activity detection (with comfort noise generation) and echo cancellation are key in meeting quality expectations. These features require a robust and *in-service-hardened* implementation to be considered *toll quality*. The absence of any of these features will result in less than toll quality voice service.

### ***Scalability***

The ability to scale VoP networks to large volumes of traffic is critical to service providers justifying deployment of a packet-based infrastructure. Scalability requires VoP gateways to support very high

volumes of traffic without degradation of voice quality. This places increased pressure on gateway vendors to support thousands of voice channels on a single platform driving the need for a system level evaluation of density.

In most cases density will be limited by the power requirements for the total system. Service providers must maintain power and cooling within industry guidelines (i.e. NEBS specifies a maximum of 1275 watts for a 23" bay with forced air cooling). For platform developers this important design criterion can only be met with a solution that optimizes the design for power and area while maintaining carrier class features. Therefore, the most important performance specification is not channels per chip but power per channel. It is possible that a service provider will run out of power-budget before shelf space in a bay. This would result in under utilization of central office space driving higher operational costs. Power per channel is the key metric.

**Flexibility**

Flexibility includes the ability to add new services and to react to standards evolution. VoP gateway platforms based on solutions that support features beyond PCM voice (features such as low bit rate codecs and fax relay) enable service providers to add services without the disruption and expense of replacing equipment. These software-based features allow platform developers to distinguish their gateways from the competition. From a solution density perspective, architectural considerations such as sizing of DSP resources and memory will determine a solution's level of flexibility.

**Key Solution Density Criteria for High Density Applications**

The following table summarizes the key criteria for high density solutions from a solution density perspective.

**Solution Density Summary: Relative Importance of Architecture Considerations**

<b>RISC/DSP Processor</b>	<b>Integration Of System Functions</b>	<b>Integration Of System Interfaces</b>	<b>Power Consumption</b>	<b>Channel Density</b>	<b>Voice Features</b>	<b>Cost</b>
Multi-core DSP	Medium	Medium	High	High	High	High

The architecture of a high density VoP gateway is discussed in the following section with focus on power, channel density and voice feature supporting true carrier class voice.

**3.0 HIGH DENSITY VOP ARCHITECTURE**


High density VoP architectures are driven by the following critical elements:

- Power per channel of the solution expressed in milli-Watts (mW) per channel
- Cost per channel of the solution which includes silicon/hardware, software and intellectual property licensing costs
- Channel Density of the solution expressed in channels per square inch
- System Partitioning including packet aggregation and routing
- Software Features that define the functionality of the product
- Network Management Capabilities to address high availability and accountability

Cost, power and area must be evaluated on a total system basis and must be a function of the features and capabilities supported. Figure 1 shows an example high-density design consisting of the following hardware modules:

- Alarm Monitor & Control (M&C) Module
- Call Processing Modules

- PSTN Interface Modules
- Packet Interface Modules
- Voice over Packet (VoP) / Universal Port (UP) Modules
- Backplane Interface

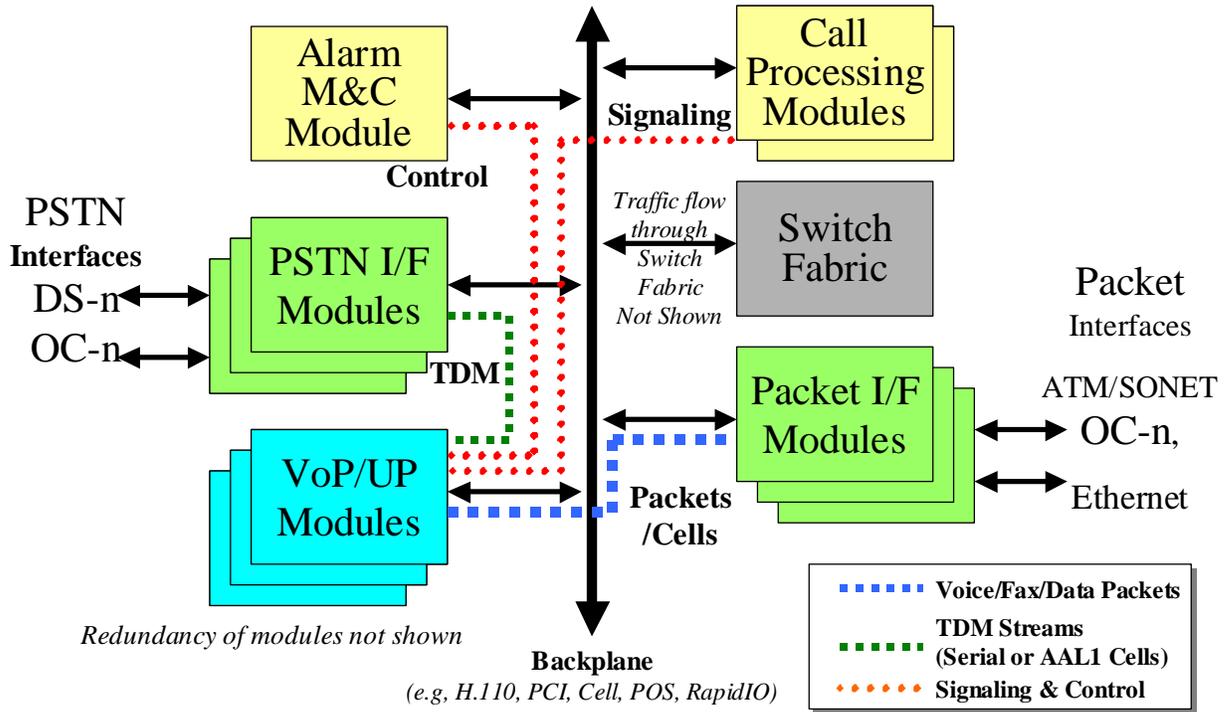

**Figure 1. High Density VoP Reference Design**

The Alarm Monitor & Control (M&C) Module performs the overall network management for the equipment. This includes configuration on a per channel basis, status and statistics collection, call record reporting and alarm processing. The Call Processing Modules perform call establishment and call tear down for the system and performs interworking functions between the PSTN and packet network. Depending on the application and location of the equipment, the following signaling may be performed:

- PSTN Telephony Signaling:
  - SS7
  - ISDN
  - TR08
  - TR303
- VoP Network Signaling
  - H.323
  - MGCP
  - Megaco
  - SIP
  - ATM Broadband Local Emulation Services (BLES)

Depending on the architecture, call processing may be centralized or distributed with the VoP modules performing lower levels of the signaling protocols.

The PSTN Interface Modules provide the interface to the Public Switched Telephone Network. Traditionally, PSTN interfaces for VoP consisted of T1 (24 channels) and E1 (30 channels). High Density VoP systems being designed today typically have multiple DS3 (28 T1s or 672 channels) and even multiple OC-3 (2,016 channels) PSTN interfaces as manufacturers offer equipment capable of handling in excess of 100,000 voice channels in a single rack of equipment.

The Packet Interface Modules provide the interface to the packet switch network. The two most prevalent networks are ATM and IP. Depending on the application, VoP equipment may be ATM-centric, IP-centric or support a hybrid of both ATM and IP voice. In many cases, it is important for the equipment to support both Voice over ATM (VoATM) and Voice over IP (VoP) on a per call basis to provide interworking between ATM and the IP world. Packet interfaces include OC-n (OC-3, OC-12, etc.) optical interfaces for ATM and Packet Over SONET (POS) as well as multiple 100BaseT and Gigabit Ethernet interfaces.

The Switch Fabric Module performs the routing of cells/packets through the system. Line cards fill out the appropriate header information that is used by the switch fabric to direct cells/packets to the appropriate line card/external interface.

As shown in Figure 2, The VoP Modules consist of a “farm” of Digital Signal Processors (DSPs) that perform the actual conversion of the voice streams between the PSTN and packet worlds. In the PSTN to packet network direction, the VoP Modules receive 64 Kbps data streams from the PSTN Interface Modules and output packets or cells to the Packet Interface Modules. Similarly, in the packet network to PSTN direction, the VoP Modules receive packets or cells from the Packet Interface Modules and output 64 Kbps streams to the PSTN Interface Modules. The DSPs are controlled by a “host” processor that is responsible for configuration and software download of the DSPs as well as assisting in call establishment and termination and other network management functions.

In order to concentrate a large number of VoP channels, aggregation logic is required. This logic performs the following functions:

- Aggregates packet streams from multiple DSPs to the Backplane/Packet Network Interface
- Routes incoming packets from the Backplane/Packet Network Interface to the appropriate DSP
- Provides a standard interface to the Backplane/Packet Network Interface
- Filters network management and call setup/teardown information to a Host processor

There are many different backplane interfaces that are used in systems such as these. Most typical are PCI and cell bus variants as well as Packet over Sonet (POS). TDM samples from the PSTN can be relayed over an H.110 TDM bus or the PCM samples can be encapsulated in ATM cells to be sent over the same cell bus that is used for packet traffic.

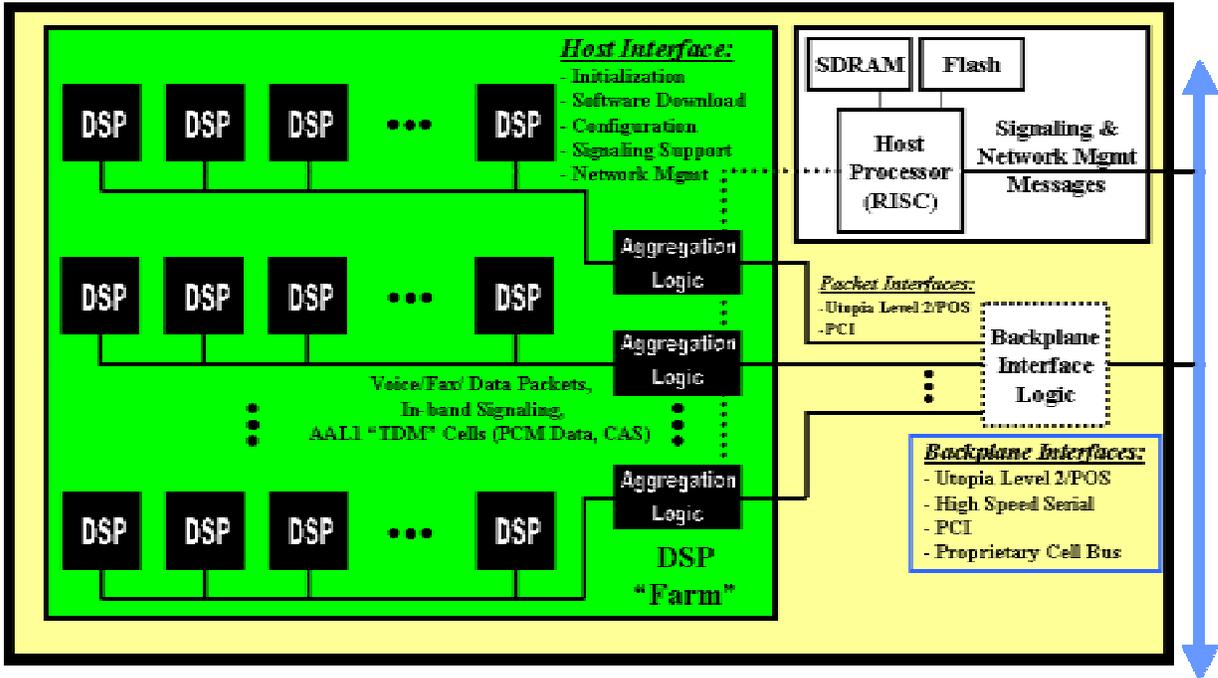


Figure 2. VoP High Density Module

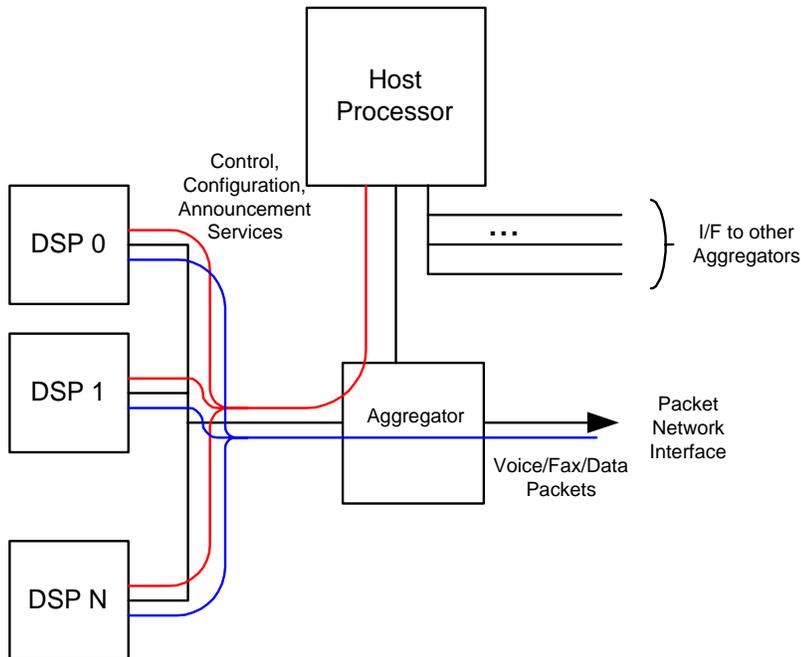


Figure 3. VoP Aggregation Logic

Software is a critical ingredient of high quality VoP systems. There are many features that must be implemented for Carrier Class systems. The most important software features are:

- Echo Cancellation
- Voice Compression
- Packet Play-out Software
- Tone Processing
- Fax and Modem support
- Packetization
- Signaling Support
- Network Management

### ***Echo Cancellation***

One of the keys to high quality VoP is having a hardened line echo canceller that can properly cancel echo, which is present even in a conventional POTS network. In this type of network, echo is acceptable because delay is less than 50 milliseconds and the echo is masked by the normal side tone that every telephone generates. Echo becomes a problem in packet networks because the delay is almost always greater than 50 milliseconds, thus requiring echo-cancellation techniques as part of the VoP solution. The ITU defines echo cancellers performance requirements. The original standard for echo cancellers was ITU Recommendation G.165; a more stringent set of requirements is provided in ITU Recommendation G.168. These standards provide a series of objective performance tests but do not describe how to implement an echo canceller nor do they address the subjective performance of an echo canceller.

A good echo canceller must have the following attributes:

- It removes echo well. This includes removing echo at the start of a call as well as preventing any form of echo during a call.
- It handles double talk (both sides talk simultaneously) well. This includes not clipping the voice at the beginning or end of a double talk voice spurt.
- It handles background noise well. This includes handling high background noise and variable background noise.
- Exceeds G.165/G.168; support for future (more stringent) ITU EC standards, e.g., G.168-2002
- Field Proven. Note: compliance with G.165/G.168 alone is no guarantee that the EC will work properly in real life situations.
- Provides fast convergence time, low residual echo (depth of convergence), reliable detection of double-talk without divergence or clipping, and handles background noise and narrow band signals well
- Supports up to 128 msec tail (often specified for “Carrier Class” solutions) including support for multiple reflections over the entire 128 msec tail
- Capable of dynamically tracking echo path changes: required for conferencing, call transfers, permanent off-hook connections, and to support redundancy
- Behaves properly in the presence of 4-wire connection and low hybrid attenuation
- Built-in configurability and instrumentation

### ***Voice Compression***

G.711 PCM (64Kbps) is being most widely deployed for very high density VoP Solutions. This is enabled by having “bandwidth to burn” in the infrastructure and the fact that PCM requires less processing power per channel than for low bit rate (LBR) compressed voice results in higher densities at a lower cost from an equipment perspective. LBR compressed voice is required for Broadband Access equipment where bandwidth to the infrastructure is constrained, e.g.:

- Derived Voice over Cable Modem and Fixed Wireless Applications where there is a shared medium from the subscriber device to the head-end
- Derived voice channels over xDSL Applications where the subscriber line is a long distance away from the CO
- Mobile to Mobile Cellular Calls where voice is already compressed and it is undesirable to perform transcoding (degrades voice quality and adds delay)
- Emerging Internet Voice Portal Market
- Internet audio content is stored and/or transmitted as compressed data compatible with PC programs
- Wideband Voice Compression where new algorithms fulfill the promise of packet voice quality better than the PSTN

The following are important considerations for voice compression:

- Passes all ITU Test Vectors
- Configurable Packetization for maximum flexibility
- Proprietary Voice Activity Detection (VAD) required for Voice Codecs that do not support an integral VAD
- Adaptive Comfort Noise Generation (CNG) in conjunction with VAD
- No degradation when all channels active

### ***Packet Play-out***

Packet play-out addresses the effects of network impairments on the voice. Impairments include lost packets, delay of packets, including variable delay which distorts the timing sequence of the original voice. Therefore, it is essential for high quality VoP to have packet play-out algorithms. These algorithms should

- Compensate for packet loss, delay and jitter
- Be adaptive for lowest delay
- Reside in DSP for system Scalability
- Be highly configurable and provide comprehensive network management statistics

### ***Tone Processing***

Tone processing is essential for call setup and termination as well as handling in call user functions such as accessing voice mail, making credit card calls, etc. The following are key elements for high-density systems:

- Reliable Tone Detection (no false detects, no failure to detect)
- Early detection to minimize delay and to prevent in-band tone leakage which can lead to false tone generation at the remote end
- Different detection requirements based on network application and system architecture: Dial Digits, Fax Detection, Modem Detection, Call Progress Tones
- Support for bi-directional tone detection and generation in cases where the Customer Premise Equipment does not perform these functions

### ***Fax and Modem Support***

One of the key features of a VoP System for Carrier Class applications is to fully emulate the PSTN, e.g., Class 5 switch replacement. Therefore, it is essential that these systems handle fax and modem in addition to voice. Fax and modem can be handled by a technique known as "PCM up-speed" where the VoP system, upon detection of fax or modem forwards all data for a given channel as a 64 Kbps transparent PCM stream between the two end-points. While this works well for networks with no packet loss or

excessive delay/jitter, networks (particularly VoP networks) experience occasional packet loss (<< 1%) that can cause the modems to retrain, or even call failure. In cases where PCM up-speed is inadequate, the system must support Fax and Modem Relay.

Fax relay provides reliable real-time fax service between two analog fax machines over a packet network. The VoP equipment at both ends of the packet network spoofs the analog fax machines such that they operate as if directly connected over a PSTN connection. The VoP equipment performing fax relay functions must handle the effects of network delay, jitter (variable delay), and lost packets while preventing the fax machines from timing out. Standards protocols such as T.38 and AAL2 exist for interoperability between equipment vendors. Proprietary techniques are often used to improve the interoperability between different fax machines that are subjected to long delay and other packet-network effects. Fax relay consists of the following functions:

- Fax Modem Pumps: V.17, V.29, V.27ter, V.21
- Fax Relay Protocols: T.38 (TCP/IP), AAL2 (ATM)
- Fax Machine Spoofing Protocols: Proprietary

Currently, there are no interoperability standards for Modem Relay but standards are being proposed. Modem relay consists of the following functions:

- Modem Pumps: e.g., V.90, V.34, etc.
- Modem Relay Protocol: Negotiation, Flow Control, Error Control

### ***Packetization***

The following packet encapsulation is performed in the DSPs to facilitate scalability and flexibility:

- VoP (RTP/RTCP)
- AAL2
- AAL1xN (for videoconferencing streams)

These should be supported on a per channel basis to support hybrid ATM/IP networking equipment. Another important feature is something known as Network Channel Switching. This is the ability to route from packet network to packet network. The routing can include the ability to transcode the voice payload and/or change encapsulation format, e.g.:

- VoP (RTP) ⇔ AAL2
- G.726 ⇔ G.729AB

### ***Signaling***


Signaling support is an essential element of the DSP software. Features include

- Full Tone Detection & Generation Capabilities: DTMF, MF R1/R2, SS7 COT, Call Progress Tones, Bi-directional Tone Processing
- CAS and CCS Support in DSP to off-load the Host for higher scalability
- Channel Associated Signaling (CAS) Support: CAS bit processing
- Common Channel Signaling (CCS) Support - HDLC, MTP1 (SS7)
- Play out of Service Announcements (TDM or Packet Network direction)

**Network Management**

Fundamental to any communications system is the ability to discover, isolate and remedy problems as quickly as possible to minimize or eliminate the degree to which users are impacted.

- Configuration on per channel basis including set-able country code specific information
- Per channel Statistics and Status reporting
- Per channel Real-Time trace and diagnostics capabilities
- Bellcore Test Line Support for Diagnostics
- Redundancy Support

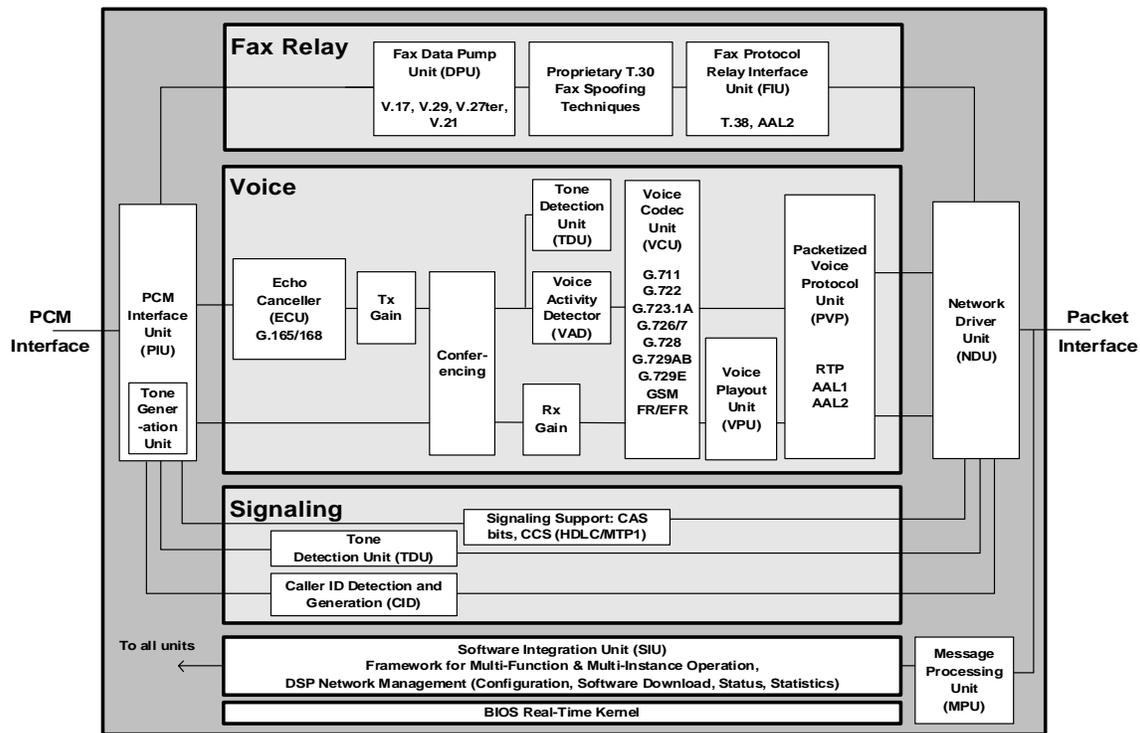

**Figure 4. High Density VoP Software Architecture**

Figure 4 shows the architecture for high density VoP software. The software should be designed to minimize delay & maximize scalability. This includes

- Efficient and adaptive algorithms
- Header encapsulation in VoP device, (RTP, AAL1, AAL2) on a per channel basis
- Low-latency implementation
- Features to off-load “host” processor to drive overall channel density

**4.0 Summary**

Solutions based on the concept of solution density that offer high density, low power and provide full-featured performance will enable a new generation of high density carrier class gateway platforms. This new generation of platforms will enable service providers to deploy a common, packet-based infrastructure for voice and data services enabling a new generation of services for businesses and the consumer.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated