

H.264 HD Baseline Profile Encoder (v2.00) on DM6446

FEATURES

- eXpressDSP™ Digital Media (XDM 1.0 IVIDENC1) interface compliant
- Validated on the DM6446 EVM
- H.264 Baseline Profile upto level 4.1 supported
- Quarter-pel interpolation for motion estimation supported
- In-loop filtering, which can be switched off for whole picture and for slice boundaries supported
- User controllable multiple slices per picture supported
- Error-robustness features like intra slice insertion in inter frames, adaptive intra refresh, constrained intra prediction, and forcefully encoding of any frame, such as I frame supported
- User controllable quantization parameter range supported
- Unrestricted motion vector search, which allows motion vectors to be outside the frame boundary supported
- Image width and height that are non-multiple of 16 supported (multiples of 4, 8 supported, non-multiples of 4 not supported)
- TI proprietary rate control algorithms

supported

- Arbitrary resolutions up to HD resolutions of 3840x2176 including standard image sizes such as PAL D1 (720x576), SQCIF, QCIF, CIF, QVGA, and VGA supported
- User configurable Group of Pictures (GOP) length supported
- User configurable parameters like `pic_order_cnt_type`, `log2_max_frame_num_minus4`, and `chroma_qp_index_offset` supported
- YUV422 interleaved and YUV420 planar color sub-sampling formats supported
- Controls the balance between encoder speed and quality by using the user defined motion estimation settings and encoding Preset option
- Constraint to keep macro block bits within 3200 bits as per the standard not supported

DESCRIPTION

H.264 is the latest video compression standard from the ITU-T Video Coding Experts Group and the ISO/IEC Moving Picture Experts Group. This H.264 Encoder is validated on the DM6446 EVM with Code Composer Studio version 3.2.37.12 and code generation tools version 6.1.2.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

eXpressDSP is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

Performance Summary

This section describes the performance of the H.264 HD Baseline Profile Encoder on DM6446 EVM.

Table 1. Configuration Table

CONFIGURATION	ID
H.264 base profile levels up to level 4.1	H264_ENC_001

Table 2. Cycles Information - Profiled on DM6446 EVM with IMCOP and Code Generation Tools Version 6.1.2

CONFIGURATION ID	PERFORMANCE STATISTICS (MEGA CYCLES PER SECOND) ⁽¹⁾		
	TEST DESCRIPTION	AVERAGE ⁽²⁾	PEAK ⁽³⁾⁽⁴⁾
H264_ENC_001	720p5994_parkrun_ter_1280x720_422i_205fr.yuv, targetFrameRate=13fps, targetBitRate=2Mbps, IntraPeriod=0.5sec, encodingFrameRate=15fps, rcAlgo=PLR4_RC,NFAVG=102	510	537
	smaninrest_p1920x1080_30fps_420pl_60fr, targetFrameRate=5 fps, targetBitRate=9 Mbps, IntraPeriod=1sec (encoding Frame rate=5 fps), rcAlgo=PLR4_RC, NFAVG=10	571	622
	mobile_p352x288_30fps_420pl_300fr, targetFrameRate=30 fps, targetBitRate=0.768 Mbps, IntraPeriod=1sec (encoding Frame rate=30 fps), rcAlgo=PLR4_RC, NFAVG=100	139	145
	sheilds_720x480_422i_252frames.yuv, targetFrameRate=30 fps, targetBitRate=1.572 Mbps, IntraPeriod=0.5sec (encoding Frame rate=30 fps), rcAlgo= PLR4_RC, NFAVG=252	418	448
	Amazing_caves_1280x720_yuv422i_250frames targetFrameRate=13 fps, targetBitRate=3 Mbps, IntraPeriod=0.5sec (encoding Frame rate=15 fps), rcAlgo=PLR4, NFAVG=125	557	608
	720p50_shields_ter_1280x720_422i_300fr.yuv, target frame rate = 13 fps, targetBitRate=2mbps,rcAlgo=PLR4_RC, NFAVG=150,IntraPeriod=0.5 sec (encoding Frame rate=15 fps)	505	532
	tennis_p704x480_30fps_420pl_150fr, targetFrameRate=30 fps, targetBitRate=1.572 Mbps, IntraPeriod=1sec (encoding Frame rate=30 fps) rcAlgo=PLR4_RC, NFAVG=100	344 ⁽⁵⁾	380 ⁽⁵⁾
	720p5994_parkrun_ter_1280x720_422i_205fr.yuv, targetFrameRate=13 fps, targetBitRate=3 Mbps, IntraPeriod=1sec (encoding Frame rate=15fps), rcAlgo=PLR4_RC, NFAVG=102	442 ⁽⁵⁾	472 ⁽⁵⁾

- (1) Measured with program memory, stack, and I/O buffers in external memory with cache configuration : 32 K-bytes L1P Program Cache, 64 K-bytes L1D Data Memory, and 16 K-bytes L1D Data Cache, 64 K-bytes L2 Cache, 32 bit DDR @ 162 MHz, CPU @ 594 MHz and only used by encoder.
- (2) Average MCPS is calculated by multiplying average Mega Cycles Per Frame numbers by target frame rates. Average MCPS is calculated over NFAVG frames.
- (3) Peak MCPS is calculated on moving average of 4 frames over NFAVG frames.
- (4) For higher bit-rates of encoding, actual cycles performance will be worse than the above mentioned numbers.
- (5) For these, encodingPreset = High speed, option is used. All other performance numbers use (encodingPreset = User_defined, which uses High quality option).

Note: Average and peak MCPS measurements can vary by +/-5%.

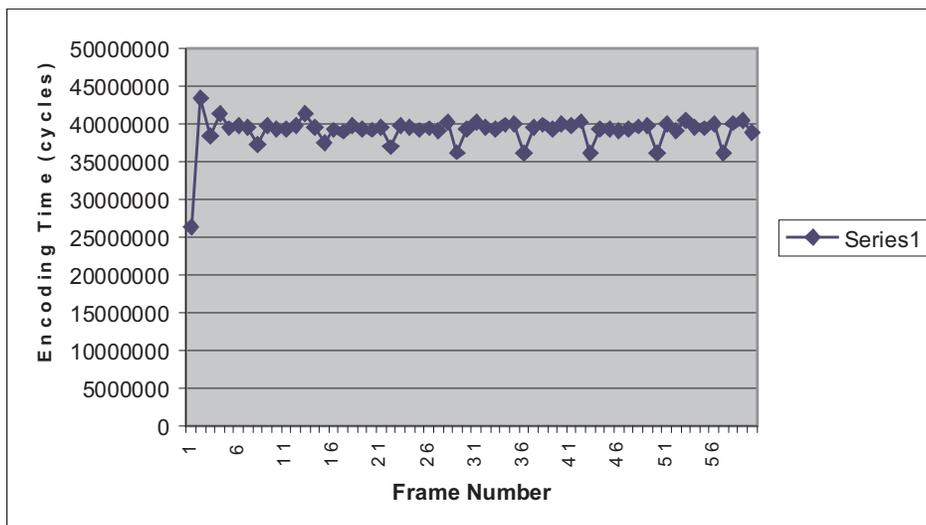


Figure 1. Encoding Time for Individual Frames (720p50_shields_ter_1280x720_422i_300fr.yuv @ 2Mbps @ 15 fps, with 1 MV, QPI, LPF, UMV, Target Frame rate = 13fps, rc algo PLR4_RC, NFAVG = 150 Intra Period = 0.5sec and User_defined Preset)

Table 3. Memory Statistics - Generated with Code Generation Tools Version 6.1.2

CONFIGURATION ID	LEVEL AND RESOLUTION	MEMORY STATISTICS ⁽¹⁾						TOTAL
		PROGRAM MEMORY	DATA MEMORY					
			INTERNAL	EXTERNAL			STACK	
				PERSISTENT	CONSTANTS	SCRATCH		
H264_ENC_001	Level 3.0 D1 (720x576)	162.53	63.25	1532	9.3	469	8	2242.55
	Level 4.0 HD (1280x720)	162.53	63.25	3207	9.3	964	8	4412.55
	Level 4.0 HD (1920x1080)	162.53	63.25	6949	9.3	2089	8	9279.55
	Level 4.1 HD (3840x2176)	162.53	63.25	26576	9.3	8276	8	35093.55

(1) All memory requirements are expressed in kilobytes (1 K-byte = 1024 bytes) and there could be a variation of around 1-2% in numbers.

Table 4. Internal Data Memory Split-Up

CONFIGURATION ID	DATA MEMORY - INTERNAL ⁽¹⁾		
	SHARED		INSTANCE ⁽²⁾
	CONSTANTS	SCRATCH	
H264_ENC_001	0	63.25	0

(1) Internal memory refers to L1DRAM. All memory requirements are expressed in kilobytes and there could be a variation of around 1-2% in numbers.

(2) I/O buffers not included. Some of the instance memory buffers could be scratch.

Table 5. Co-Processor(s) Memory Statistics

CONFIGURATION ID	SEQ DATA MEMORY ⁽¹⁾	SEQ PROG MEMORY ⁽¹⁾	IMX WORKING MEM ⁽¹⁾	IMX IMG BUF ⁽¹⁾	IMX CMD MEM ⁽¹⁾
H264_ENC_001	1	4	27	9	4

(1) All memory requirements are expressed in kilobytes and all are scratch buffers.

Table 6. PSNR and Bit-Rate Details

TEST SEQUENCE	BITRATE / AVERAGE LUMA PSNR (in dB)				
	1572000 (bps)	2000000 (bps)	4000000 (bps)	6000000 (bps)	8000000 (bps)
parkrun_p1280x720_30fps_420pl_302fr, target frame rate = 7.5 fps, rcAlgo=PLR3_RC, NFAVG=63, IntraPeriod=1 sec	-	25.98	29.05	-	-
shields_p1280x720_30fps_420pl_302fr, target frame rate = 7.5 fps rcAlgo=PLR3_RC, NFAVG=75 IntraPeriod=1 sec	-	35.15	-	38.96	-
stockholm_p1280x720_30fps_420pl_302fr, target frame rate = 7.5 fps rcAlgo=PLR3_RC, NFAVG=75 IntraPeriod=1 sec	-	34.70	36.48	-	-
tennis_p704x480_30fps_420pl_150fr.yuv, target frame rate = 30 fps rcAlgo=DCES_TM5, NFAVG=100 IntraPeriod=0.5 sec	29.98	-	-	-	-
stockholm_p1280x720_30fps_420pl_302fr, target frame rate = 7.5 fps rcAlgo= DCES_TM5, NFAVG=150 IntraPeriod=0.5 sec	-	32.63	-	-	-

Note:

1. Scene change detection is OFF
2. Loop Filter enabled

Notes

- I/O buffers:
 - Input buffer size = 4 M-bytes (1080P, one YUV422 interleaved frame)
 - Output buffer size = 2025 K-bytes (for encoding one 1080P frame)
- Memory Configuration
 - L1P: 32 K-bytes Program Cache
 - L1D: 64 K-bytes Data Memory and 16K-bytes Data Cache
 - L2: 64 K-bytes Cache
- The performances obtained in [Table 2](#) are sensitive to algorithm code placement. Refer the sample linker file provided in the test application setup for algorithm code placement. This is used for profiling in [Table 2](#).
- The algorithm uses 6 QDMA channels and parameter space equal to 35 parameter entries. The algorithm uses DMAN3 interface for logical allocation of these channels.
- Total data memory for N non pre-emptive instances = Constants + Runtime Tables + Scratch + N * (Instance + I/O buffers + Stack)
- Total data memory for N pre-emptive instances = Constants + Runtime Tables + N * (Instance + I/O buffers + Stack + Scratch)

References

- ISO/IEC 14496-10:2005 Information technology -- Coding of audio-visual objects -- Part 10: Advanced Video Coding
- *H264 HD Baseline Profile Encoder on DM6446 User's Guide* (literature number: SPRUFQ6)

Glossary

TERM	DESCRIPTION
Constants	Elements that go into .const memory section
Scratch	Memory space that can be reused across different instances of the algorithm
Shared	Sum of Constants and Scratch
Instance	Persistent-memory that contains persistent information - allocated for each instance of the algorithm

Acronyms

ACRONYM	DESCRIPTION
CIF	Common Intermediate Format
DMA	Direct Memory Access
DMAN3	DMA Manager
EVM	Evaluation Module
GOP	Group of Pictures
IDR	Instantaneous Decoding Refresh
LPF	Loop Filter
MV	Motion Vector
QCIF	Quarter Common Intermediate Format
QDMA	Quick Direct Memory Access
QPI	Quarter Pel Interpolation
QVGA	Quarter Video Graphics Array
SQCIF	Sub Quarter Common Intermediate Format
UMV	Unrestricted Motion Vectors
VGA	Video Graphics Array (640x480 resolution)
XDM	eXpressDSP Digital Media

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright 2008, Texas Instruments Incorporated